SAMPO

MMM-0023
VER1.0

34“ MULTIMEDIA MONITOR
SERVICE MANUAL
MODEL：SME-32DL5(P)

VER1.0

CONTENTS

1. IMPORTANT SAFETY PRECAUTIONS..... 1-1

2. BLOCK DIAGRAM..... 2-1

3. FACTORY & ELECTRONIC ADJUSTMENT... 3-1

4. TROUBLE SHOOTING GUIDES..... 4-1

5. SPECIFICATION..... 5-1

6. EXPLODED VIEW..... 6-1

7. P.C. BOARD TOP VIEW 7-1

8. SCHEMATIC DIAGRAM..... 8-1

9. ELECTRONIC PARTS LIST..... 9-1

If having any changes, do not do advanced advice.

10.DEFECT BAR CODE LIST……10-1

11.PACKING OF THE SET……..11-1

If having any changes, do not do advanced advice.

1. Before returning an instrument to the customer, always make a safety check of the entire instrument, including, but not limited to, the following items.

a. Be sure that no built-in protective devices are defective and/or have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including, but not limited to, nonmetallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. **Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning.**

b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage, Such opening include, but are not limited to, (1) spacing between the picture tube and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.

c. Leakage Current Hot Check — With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institutes (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 478. With the instrument AC switch first in the ON position and then in the OFF position, measure from a known earth ground (metal waterpipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle bracket, metal cabinet, screwheads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 3.5 milliamp. Reverse the instrument power cord plug in the outlet and repeat test. **ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER.**

AC Leakage Test

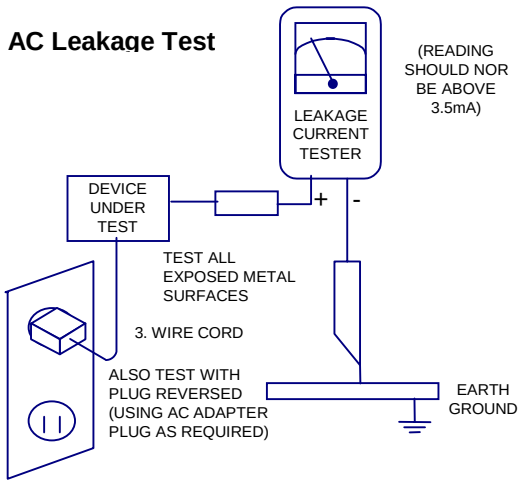

2. Read and comply with all caution and safety-related notes on or inside the Monitor cabinet, on the Projection Monitor chassis, or on the picture tube.

3. Design Alteration Warning—Do not alter or add to the mechanical or electrical design of this unit. Design alterations and additions, including, but not limited to, circuit modifications and the addition of the items such as auxiliary audio and/or video output connections might alter the safety characteristics of this Projection Monitor and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and will make you, the service, responsible for personal injury or property damage resulting therefrom.

4. Hot Chassis Warning — **a.** Some Monitor chassis are electrically connected directly to one conductor of the AC power cord and may be safely serviced without an isolation transformer only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC power source. To confirm that the AC power plug is inserted correctly, with an AC voltmeter measure between the chassis and a known earth ground. If a voltage reading in excess of 1.0V is obtained, remove and reinsert the AC power plug in opposite polarity and again measure the voltage potential between the chassis and a

known earth ground. **b.** Some Monitor chassis normally have 85V AC (RMS.), between chassis and earth ground regardless of the AC plug polarity. These chassis can be safely serviced only with an isolation transformer inserted in the power line between the receiver and the AC power source, for both personnel and test equipment protection. **c.** Some Projection Monitor chassis have a secondary ground systems in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground system are electrically separated by insulating material that must not be defeated or altered.

5. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: **a.** near sharp edges, **b.** near thermally hot parts—be sure that leads and components do not touch thermally hot parts, **c.** the AC supply, **d.** high voltage, **e.** antenna wiring. Always inspect in all areas for pinched, out-of-place, or frayed wiring. Do not change spacing between components, and between components and the printed-circuit board. Check AC power cord for damage.

6. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wireing that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.

7. PRODUCT SAFETY NOTICE—Many Monitor electrical and mechanical parts have special safety-related characteristics some of which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified in this service data by shading with a mark on schematics and by shading or a mark in the parts list. Use of a substitute replacement part that does not have the same safety characteristics as the recommended replacement part in this service data parts list might create shock, fire, and/or other hazards.

Total block diagram

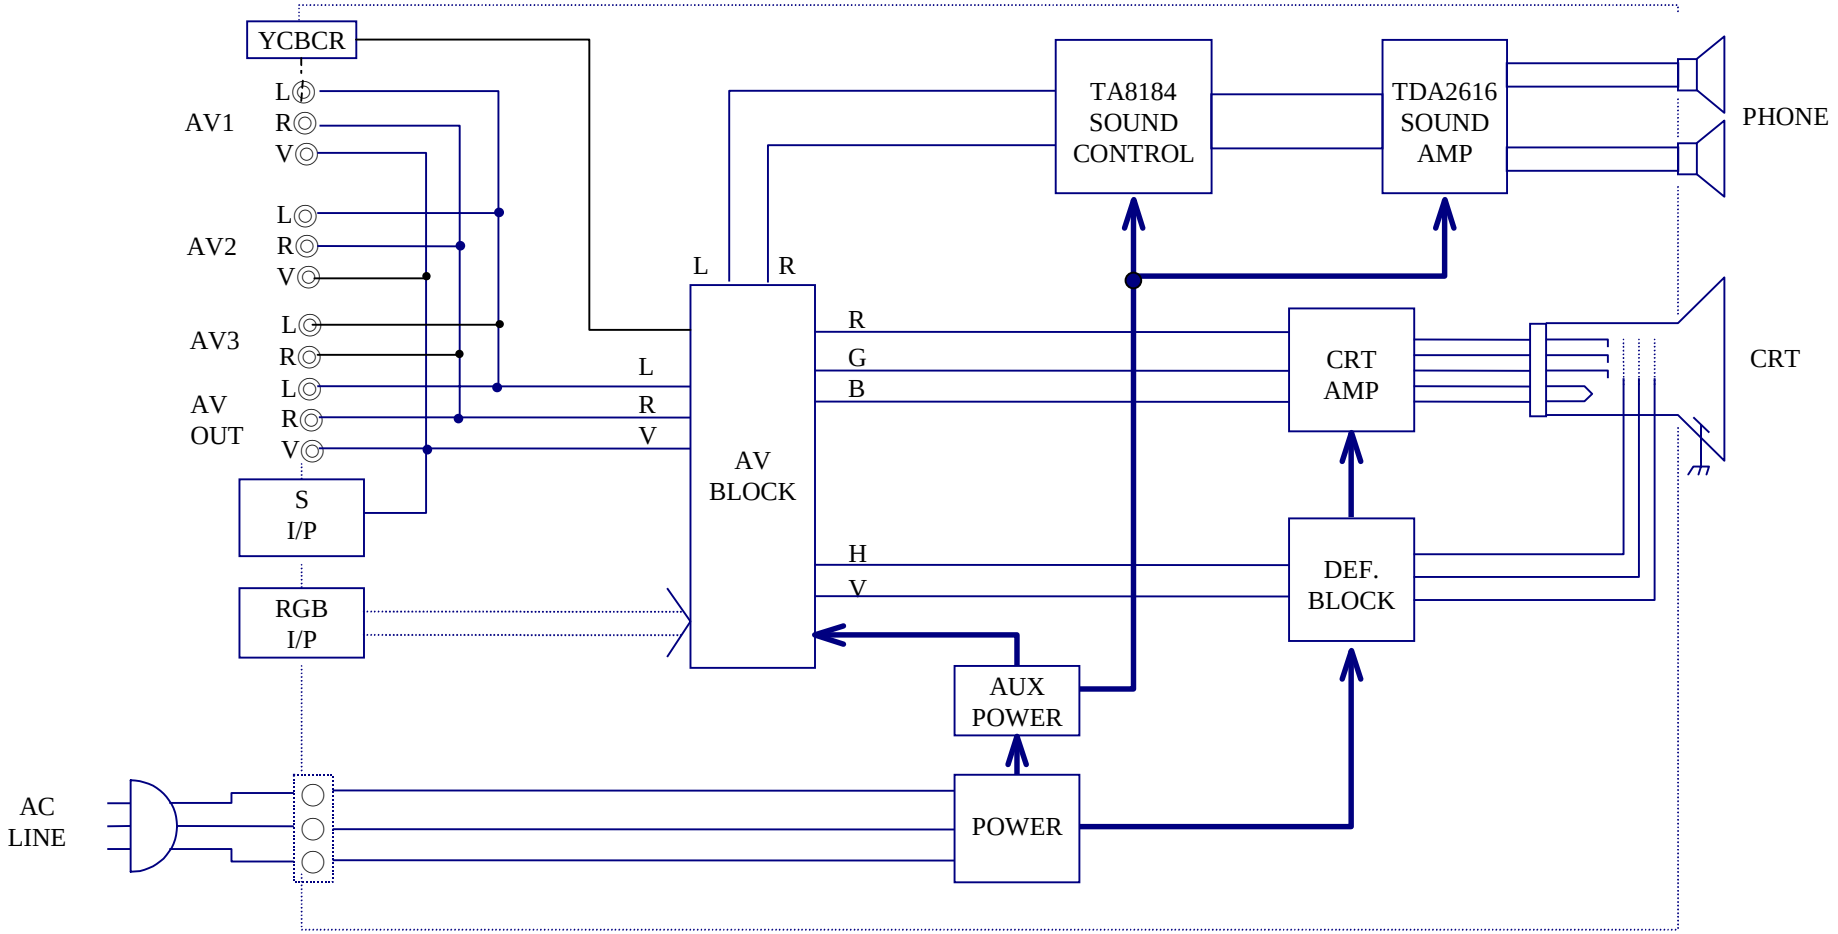

Monitor DEF. & CRT AMP block diagram

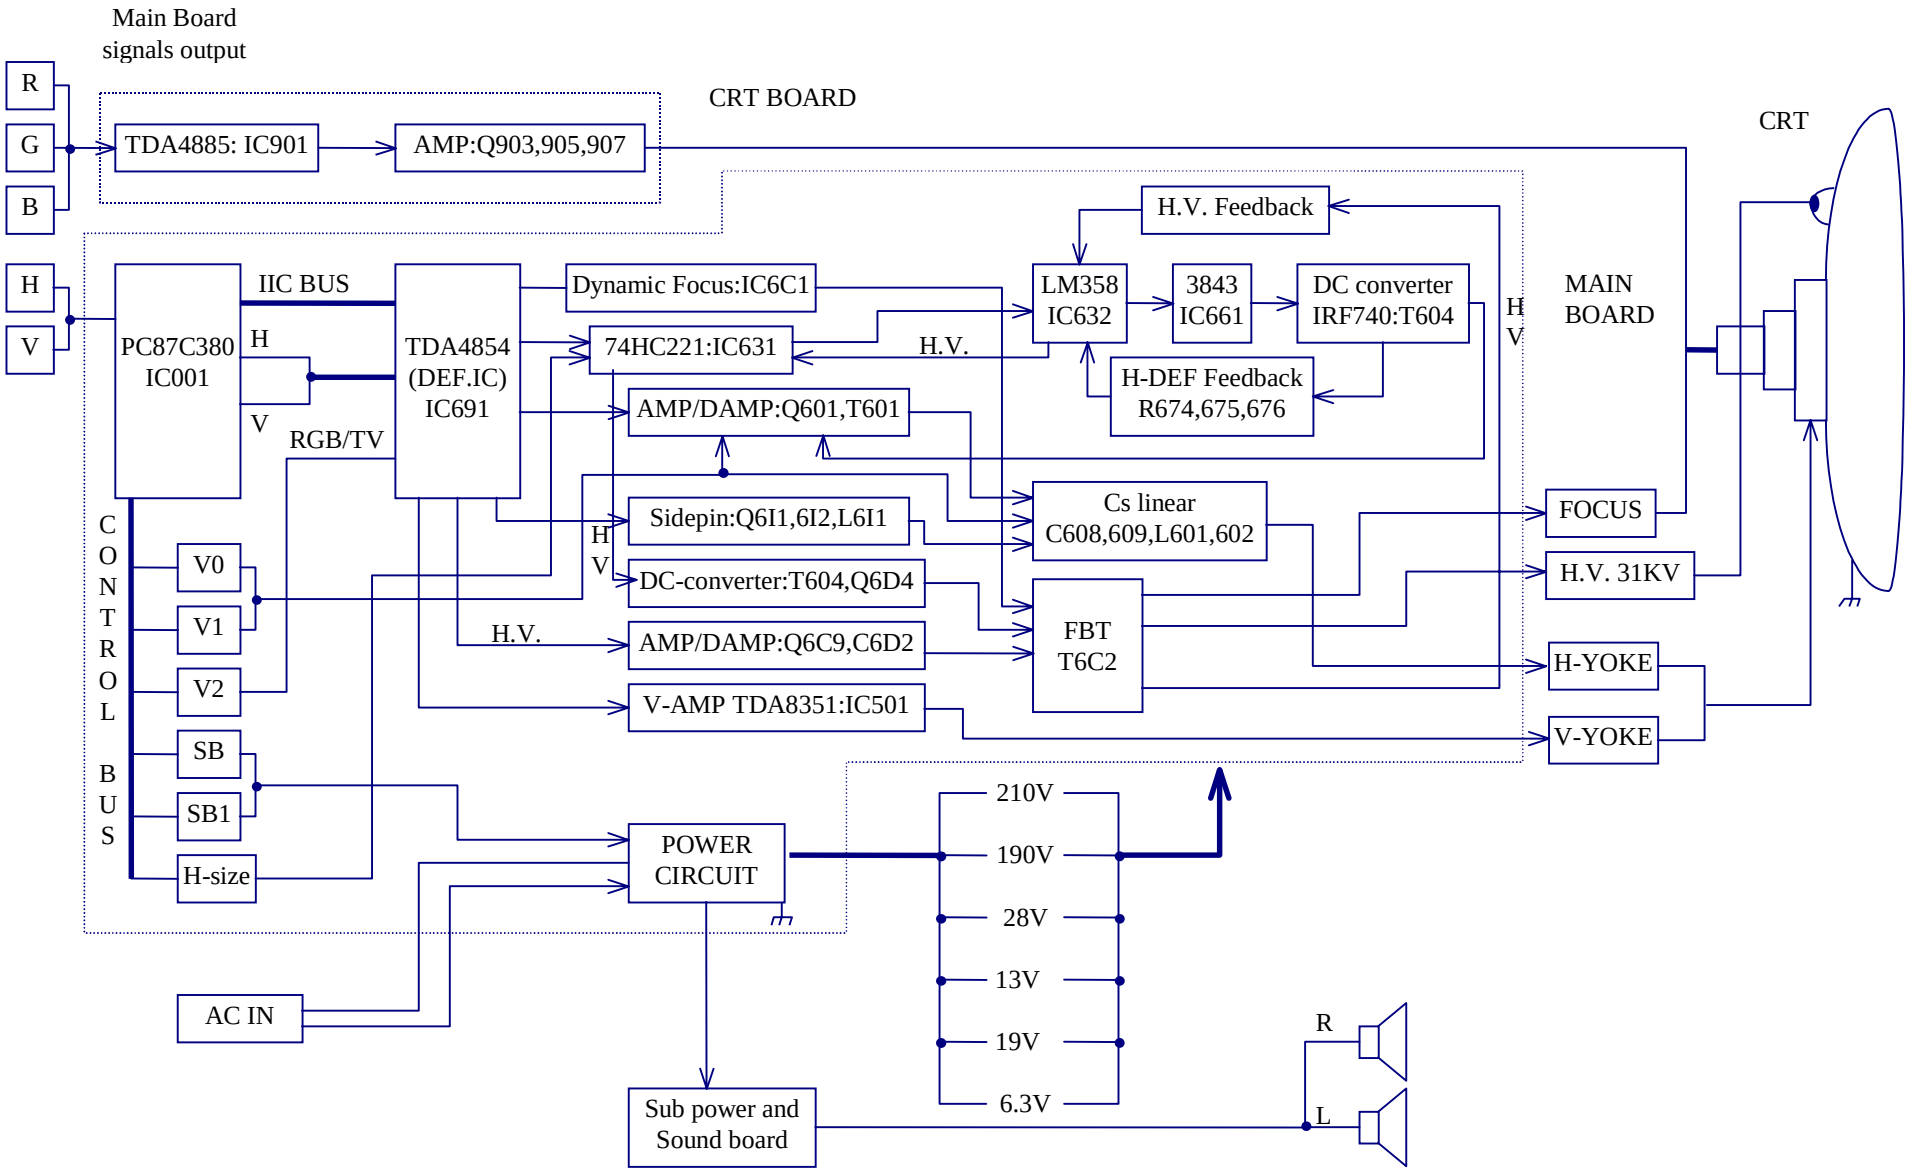

Main power supply & Aux. power & sound AMP block diagram

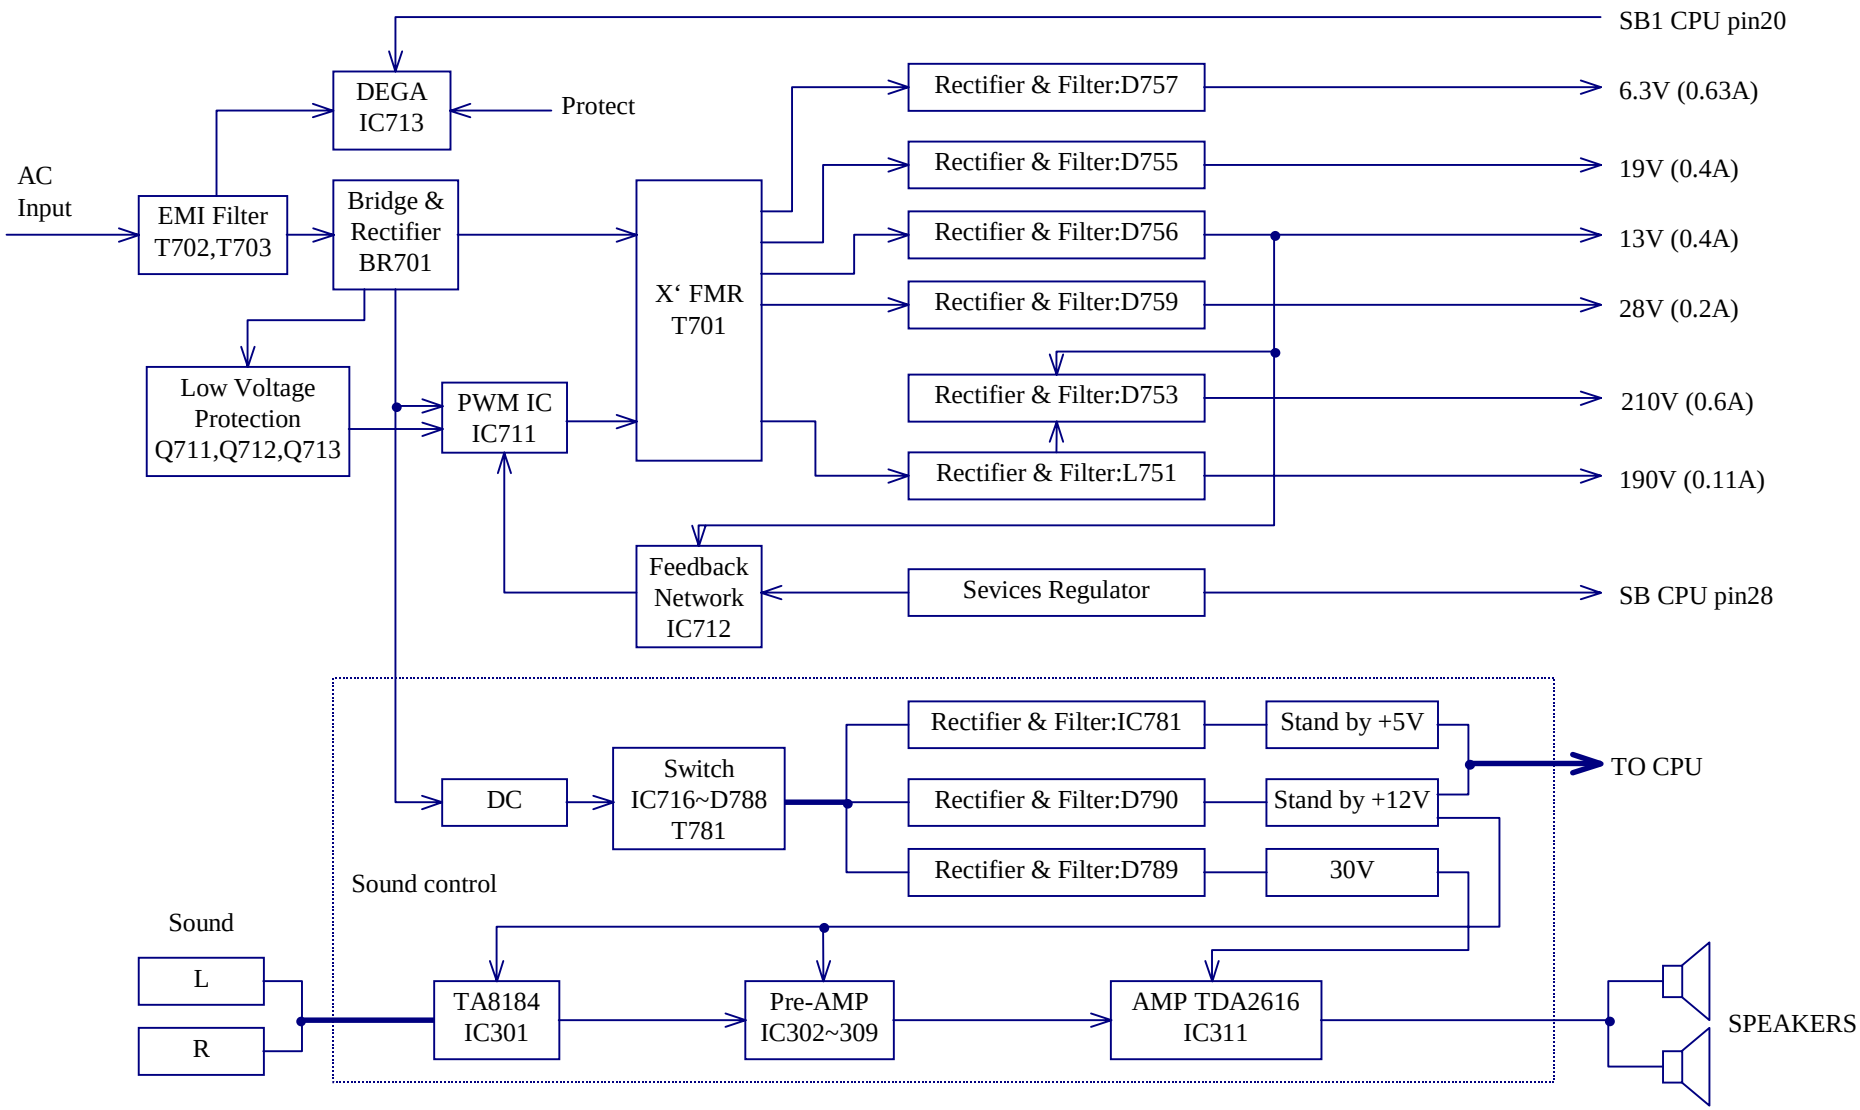

AV. Board

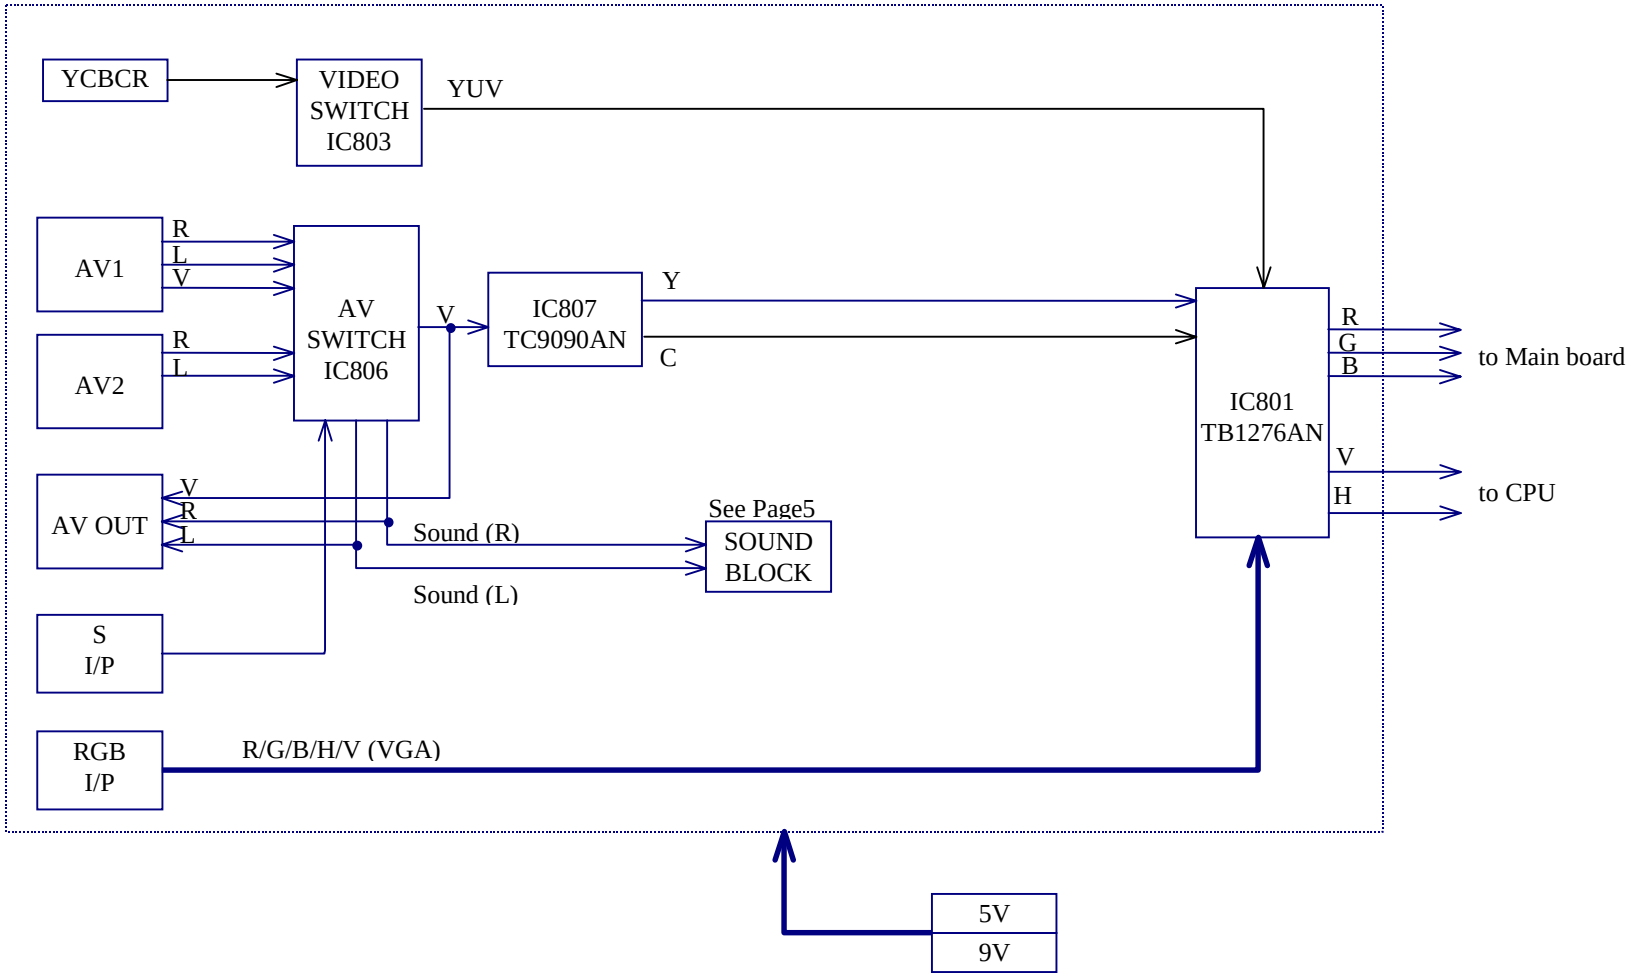
YCBCR
VIDEO SWITCH IC803
YUV
AV1
R
L
V
AV2
R
L
AV SWITCH IC806
V
IC807 TC9090AN
Y
C
IC801 TB1276AN
R
G
B
to Main board
V
H
to CPU
AV OUT
V
R
L
See Page5
Sound (R)
Sound (L)
SOUND BLOCK
S I/P
RGB I/P
R/G/B/H/V (VGA)
5V
9V

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 1 AND 2 OF THIS MANUAL.

SET-UP ADJUSTMENT

- **The following adjustments should be made when a complete realignment is required or a new picture tube is installed.**
  Perform the adjustments in order as follows :

1. **Purity**
2. **Distortion (Vertical) balance**
3. **Convergence**
4. **Focus**

Note: The PURITY/CONVERGENCE MAGNET assembly and rubber wedges need mechanical positioning.

	PART DESCRIPTION	PART NO.
CPT	Picture tube, M81AHM50X01	VBM81AHM50X01
DY	Deflection yoke, YS-70840	RDY-N1004-1----

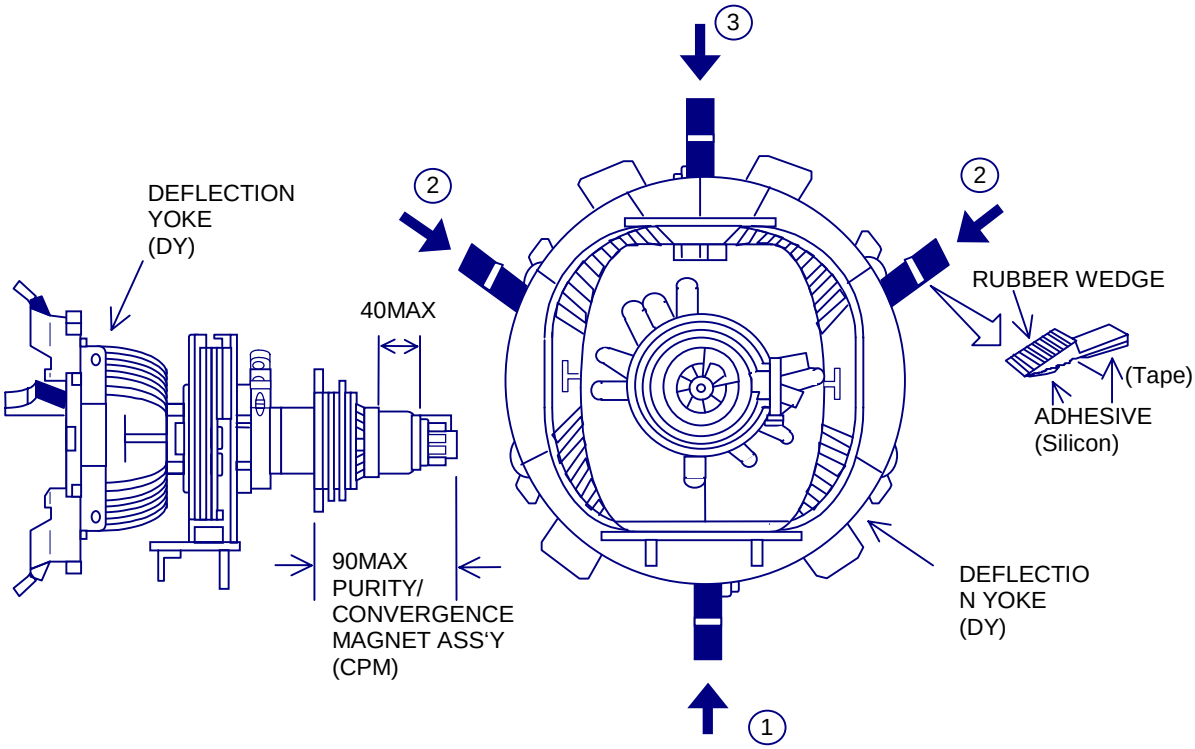

PURITY ADJUSTMENT

NOTE: Before attempting any PURITY ADJUSTMENTS, the receiver should be operated for at least 30 minutes at White Rasher.

1. **Demagnetize the picture tube and cabinet using a degaussing coil. (East direction)**
2. **Slowly move the DY forward or backward with moving 2 pole magnet of CPM until Green beam registration rank "a" is become**
   Tighten the clamp screw of the DY with correct rasher-rotation.

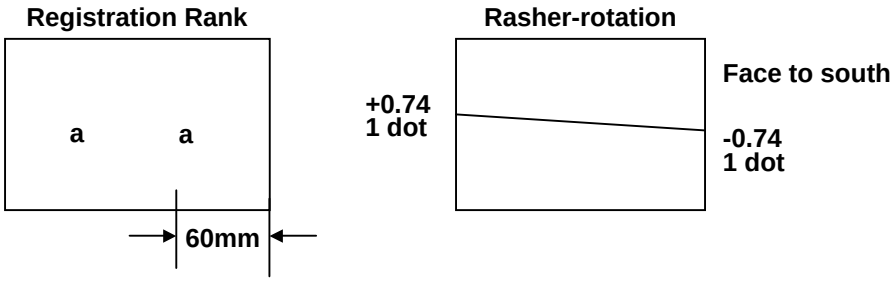

■ DISTORTION (VERTICAL) BALANCE ADJUSTMENT

Tilt front of DY up or down to obtain best balance of Top and Bottom distortion.

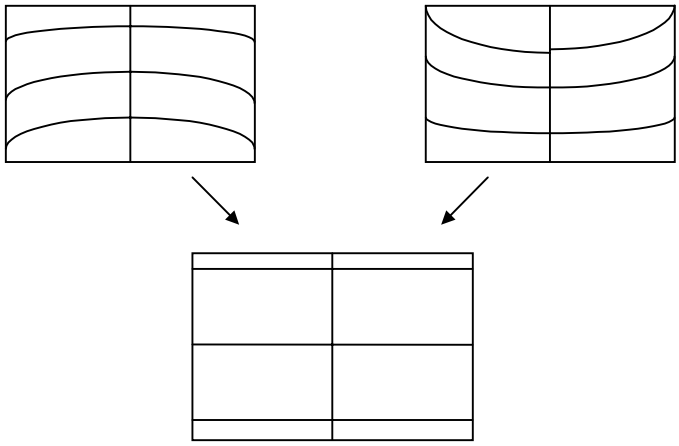

■ CONVERGENCE ADJUSTMENT

NOTE: Before attempting any convergence adjustment the receiver should be operated for at least 15 minutes.

1.Pan front of DY right or left to obtain better convergence of Yv (R or B wide pattern), and put ② WEDGE into right and left space with temporary Mounting WEDGE.



2. **Xv misconvergence adjustment:**
Adjust the Xv coil (on the deflection yoke) to correct misconvergence at both sides on screen. (See the figure below.)
Use a hexagonal tip stick (plastic) to adjust the core of coil.

Clockwise **Counterclockwise**

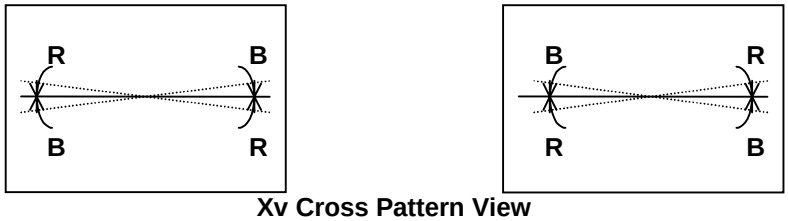

Xv Cross Pattern View

3. Center convergence adjustment

1) **Receive crosshatch pattern from a color bar/pattern generator.**
2) **Adjust the BRIGHTNESS and CONTRAST Controls for well defined pattern.**
3) **Adjust two tabs of the 4-Pole Magnets to change the angle between them (See figure 3.) and superimpose red and blue vertical lines in the center area of the picture screen.(See figure 4.)**
4) **Turn the both tabs at the same time keeping the constant angle to superimpose red and blue horizontal lines at the center of the screen. (See figure 4)**
5) **Adjust tow tabs of 6-Pole Magnets to superimpose red/blue line with green one. Adjusting the angle affects the vertical lines and rotating both magnets affects the horizontal lines.**
6) **Repeat adjustments 3, 4, 5 keeping in mind red, green and blue movement, because 4-Pole Magnets and 6-Pole magnets interact and make dot movement complex.**

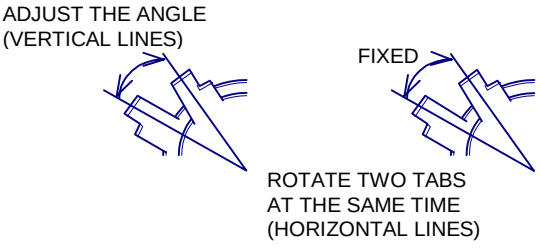

ADJUSTMENT OF MAGNETS

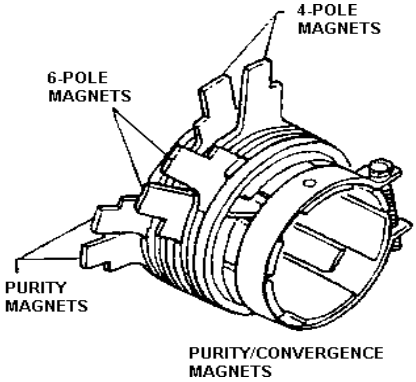

Figure 3.

Center Convergence by Convergence Magnets
Figure 4.

4. Corner convergence adjustment:
When the misconvergence is still evident on corners even though the above adjustment is done, use the ferrite sheet to correct misconvergence.

Put ferrite sheets into the space under the yoke. Decide such position that misconvergence becomes minimum, watching picture screen. (See figure below.)

Remove cover paper of ferrite sheet to stick it in the place on the tube. Put adhesive tapes on ferrite sheets to fix.

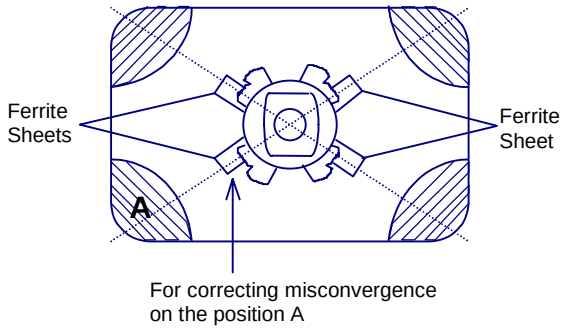

■ FOCUS ADJUSTMENT

1. **Select the RGB mode.**
2. **Receive the "H" character signal from VGA signal generator.**
3. **Adjust the FOCUS control (FBT) and DYNAMIC FOCUS VR901 watching 4 corners for the best performance of a "H" character.**
4. **Recheck overall convergence.**

FACTORY ADJUSTED METHOD AND ORDER VER 1.0

A. The entry method for factory setting item.

1. Push the factory setting button on the R/C to go to factory setting mode.
2. When the monitor set is in “on” condition, pull the AC cord away. Then push the POWER SW continuously and insert the AC cord again. Do not release the POWER SW until the screen appear raster. When the above steps completed, it is in factory setting mode.

B. The selecting items of factory setting.

1. W-BALANCE ADJ. (white balance adjustment)
2. GEOMETRY ADJ. (geometry adjustment)
3. CHECK (factory check. It work for AV‘s function check)
4. AUTO RUN (No use)
5. MTS SET
6. MMM SET

note: (1) Use the MENU +/- button to entry the desired selecting item.

(2) Use the ADJ. +/- button to entry this selected item

(3) Then use MENU +/- button again to select the adjusting items)

note: Only the item 1 and 2 of the factory adjustment are used to adjust. The No. 3 item are used as the factory check.

W-BALANCE ADJ. (white balance adjusting method)

A. R.G.B.-BLACKLEVEL..... black level adjusting of white balance

B. R.G.B.-GAIN..... white level adjusting of white balance

C. SUB-CONT-RGB

D. SUB-CONT-AV

E. SUB-TINT-AV

F. SUB-COLOR-AV

G. SUB-TINT YCBCR

Step:

1. Set the BRIGHTNESS & CONTRAST at MAX.
2. Adjust the R.G.B.-BLACKLEVEL to min.
3. Do not adjust the background color. Then adjust the other two color to reach the standard color temperature (adjust the SCREEN VR at the same time)
4. Adjust R.B.-GAIN (G-GAIN fix at 150 to 180) to let the “x”, “y” value reach the standard color temperature. (forget the Y value preferential)
5. Adjust the SUB-CONT-RGB to let the “Y” value reach the standard value
6. Repeat item 1. to 3. to check the color temperature value of black level.

The standard color temperature.

Black level	x: 270	y: 270	Y: 0.45FL
White level	x: 270	y: 270	Y: 85FL

(100% Center block)

GEOMETRY-ADJ. ITEM

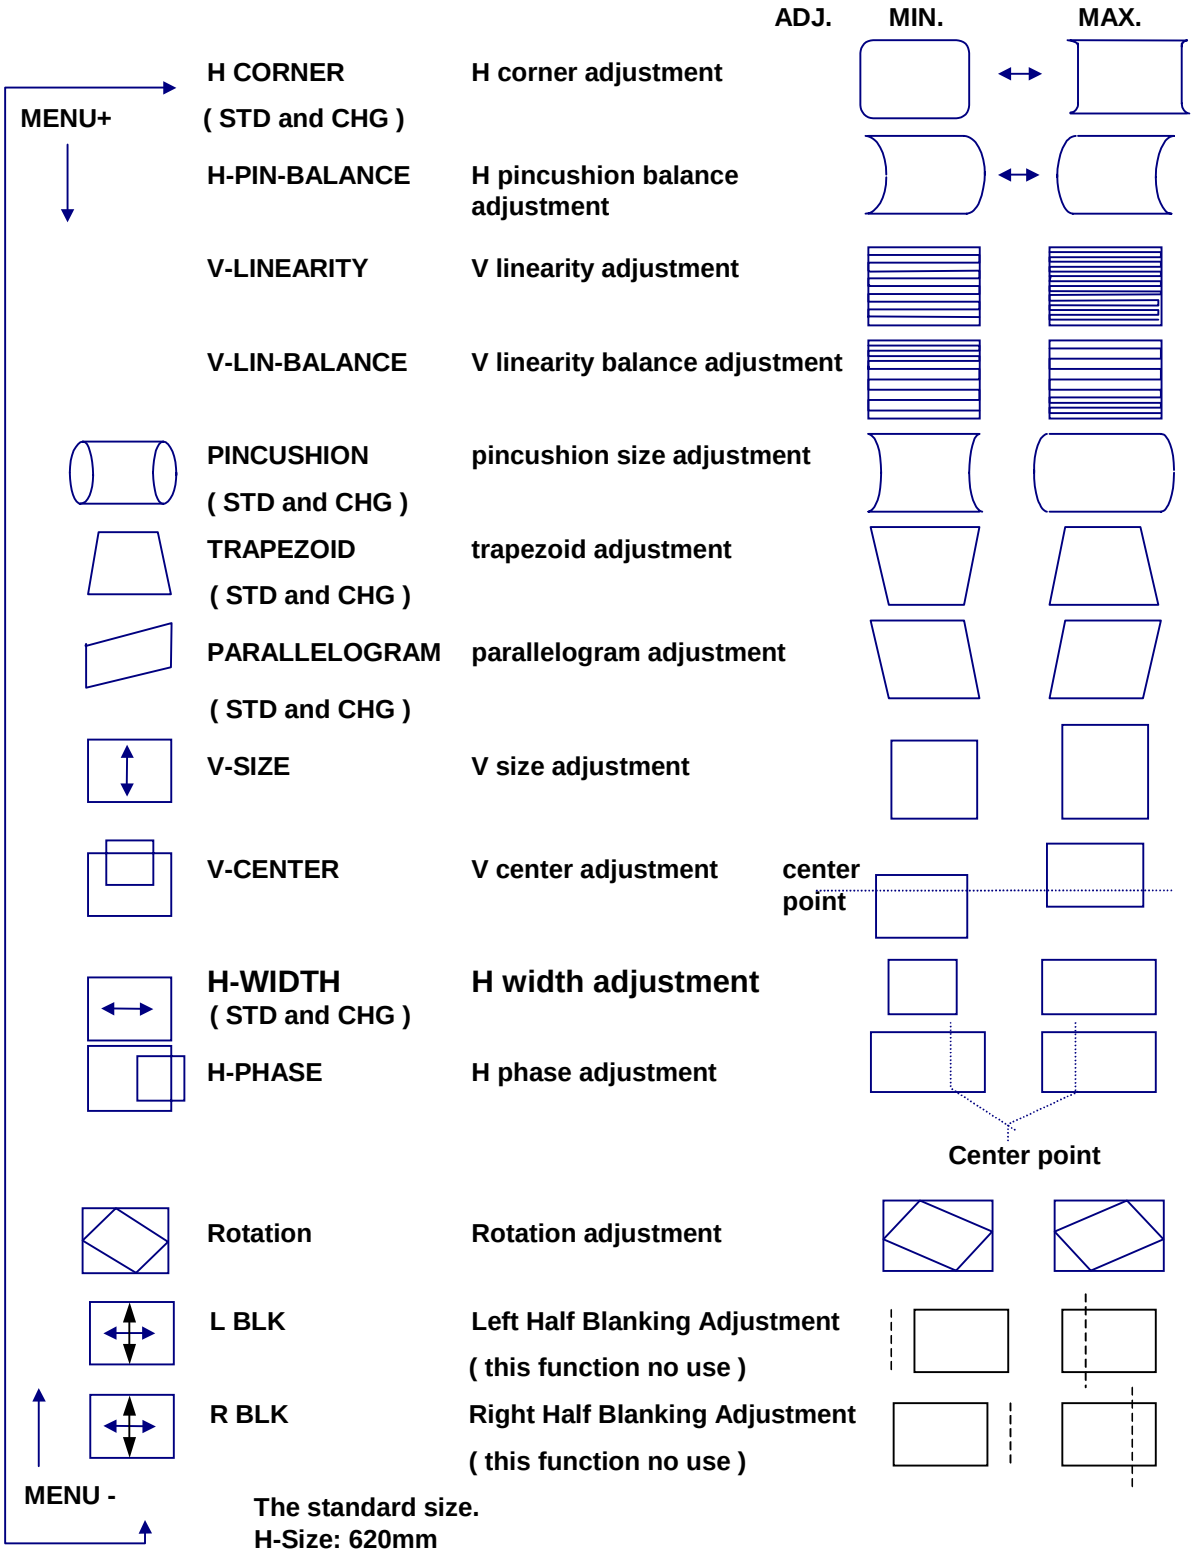

The standard size.
H-Size: 620mm
V-Size: 465mm

(1) RGB MODE

ITEM	ADJUSTMENT PROCEDURE.
1. adjustment (VR731)	1. Set to RGB mode. 2. Receive all white pattern (H:31.47K V:60Hz 640X480 mode). 3. Connect DC Volt-meter between cathode of D753 and ground. 4. Adjust VR731 for 210V± 0.5V output.
2. High voltage adjustment (VR691)	1. Connect HV meter. 2. Set to RGB mode. (H:31.47K V:60Hz 640X480 mode). 3. Receive CROSS HATCH pattern. 4. Set contrast and bright to standard.(Recall value) 5. Adjust VR691 to let the high voltage be 31± 0.5KV.
3. H-Center adjustment (VR601)	1. Set to RGB mode. 2. Receive CROSS HATCH pattern (H:43.27K V:85Hz 640X480 mode). 3. Adjust VR601 to let the raster be located at center of CRT.
4. Trapezoid adjustment (under factory adjustment mode)	1. Set to RGB mode.(have nine mode) 2. Receive CROSS HATCH pattern 3. Entry the second item of factory adjustment. 4. Find the trapezoid item and adjust the trapezoid to be best.
5. Geometry adjustment (under factory adjustment mode)	1. Set to RGB mode. .(have nine mode) 2. Receive CROSS HATCH pattern 3. Entry the item 2 of factory setting to select parallelogram item to adjust the parallelogram to be best.
6. V-Linear adjustment (under factory adjustment mode)	1. Set to RGB mode. 2. Receive CROSS HATCH pattern (H:31.47K V:60Hz 640X480 mode). 3. Entry item 2 and find V-Linearity adjustment of factory setting to adjust the V-linearity to be best.
7. H-size adjustment (RGB mode) (under factory adjustment mode)	1. Set to RGB mode. 2. Receive CROSS HATCH pattern (we have nine main modes, please see the specification of CHROMA-2135 generator pattern). 3. Entry the factory adjustment item 2 to choice the H-size adjustment. 4. Use the adjustment to let the H-size meet the specification (620mm for all main modes)

ITEM	ADJUSTMENT PROCEDURE.
8. V-size adjustment (RGB mode) (under factory adjustment mode)	1. Set to RGB mode. 2. Receive CROSS HATCH pattern (we have nine main modes, please see the specification of CHROMA-2135 generator pattern). 3. Entry the factory adjustment item 2 to choice the V-size adjustment. 4. Use the adjustment to let the V-size meet the specification (465mm for all main modes)
9. Focus adjustment (VR901, FOCUS)	1. Set to RGB mode. 2. Receive H or @ pattern (H:37.8K V:72Hz 640X480 mode) or whole letter Picture. 3. Adjust VR901 on CRT PWB and FOCUS VR of FBT to let the picture clear both at center and corner.
10. White balance adjustment (under factory adjustment mode)	1. Set to RGB mode. (H:31.47K V:60Hz 640X480 mode). 2. Receive back ground pattern (no Video Signal). 3. Press MENU key to select bright function and set bright function to max. by pressing “+” key on remote control or volume “+” key front panel. Then press MENU key again to select contrast function. And set contrast function to max. by pressing “+” key on remote control or volume “+” key front panel. 4. Entry the item 1 of factory setting to adjust RGB-BLK LEVEL and let R.G.B.-BLK LEVEL are all minimum. 5. Adjust SCREEN VR to let the picture just bright. At this time the screen appears only one color of R or G or B. The BIAS of this color does not do any adjustment. 6. Use CA-100 to measure the color temperature. 7. Adjust the R.G.B. BLACK LEVEL of the other two color to let x=270, y=270. 8. Receive BLACK pattern. And adjust SCREEN VR to let Y=0.45± 0.2FL 9. Receive center white window single. 10. G-Gain fix in 150 to 180 and adjust R-Gain and B-Gain to let x=270± 5, y=270± 5 11. Adjust contrast (Sub-CONT-RGB) to let Y=85FL± 2FL.

(2) AV MODE

ITEM	ADJUSTMENT PROCEDURE
1 H-size adjustment (AV mode) (under factory adjustment mode)	1. Set the AV mode (AV1). 2. Receive Lion pattern. 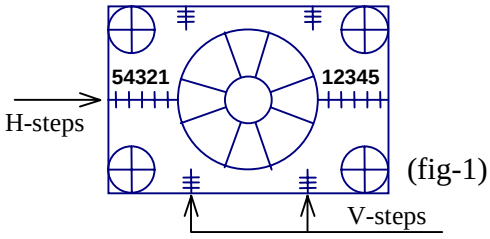 (fig-1) digital test pattern→Lion pattern 3. The item 2 of factory setting is to adjust H-size. 4. Adjust H-Steps to be 5± 0.5 .
2 V-size adjustment (AV mode) (under factory adjustment mode)	1. Press INPUT key to select AV1. 2. Receive Lion pattern for AV1. (fig-1) 3. Go to the item 2 of factory setting is to adjust V-Size. 4. Adjust V-Steps to be 4± 0.5 .
3 Sub-Tint (Sub-Tint-AV)	1. Set the AV Mode(AV1) 2. Receive Color Bar pattern with 8 steps. 3. Connect the scope to Q813 Emitter. 4. Go to the factory setting. Select the Sub-Tint to adjust the Sub-Tint to be as follow.  5. Let the below edge of step 2 and above edge of step 3 at the same level.
4 SUB Contrast (Sub-CONT-AV) (Test point : B out (Q813 “C”)	1. Set the AV Mode (AV1) 2. Receive gray scale pattern with 8 steps. (no color) 3. Connect the scope to Q813 Emitter. 4. Go to the factory setting. Select the Sub-Contract (AV) to adjust the Sub-Contract (AV) to be as follow. 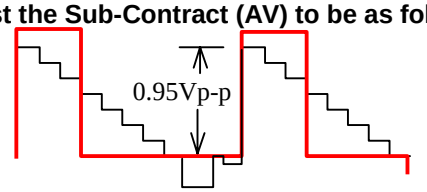

5 SUB Color (Sub-Color-AV) **(Test point : B out (Q813 "C")**	**1. Set the AV Mode (AV1)** **2. Receive Color Bar pattern .** **3. Go to the factory setting. Select the Sub-Color-AV to adjust the Sub-Color to be as follow.** 

(3) YCBCR MODE

ITEM	Adjustment Procedure
1. Sub-Tint (Sub-Tint YCBCR)	**1. Set the YCBCR Mode** **2. Receive Color Bar pattern with 8 steps.** **3. Go to the factory setting. Select the Sub-Tint-YCBCR to adjust the Sub-Tint to be as follow.**  **4. Let the below edge of step 2 and above edge of step 3 at the same level.**

STAND-BY POWER

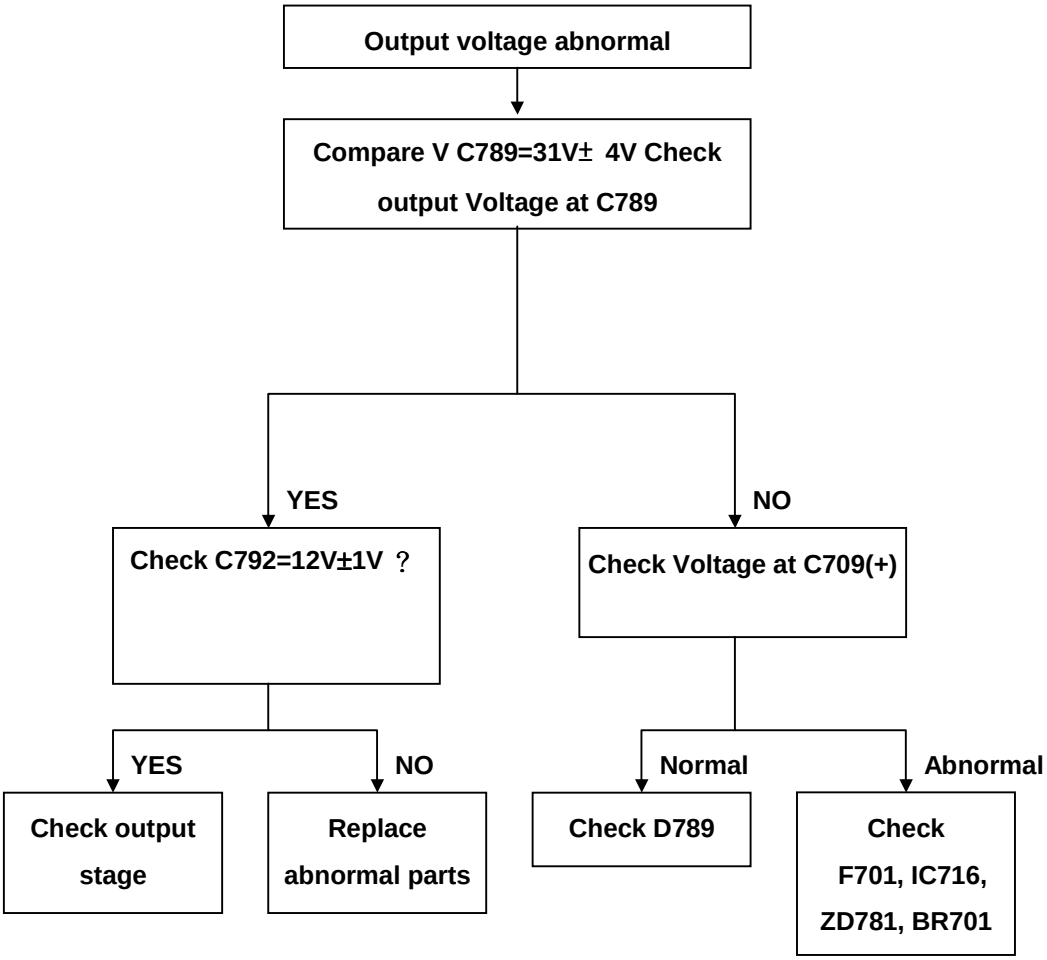

MAIN POWER

1. NO MAIN POWER

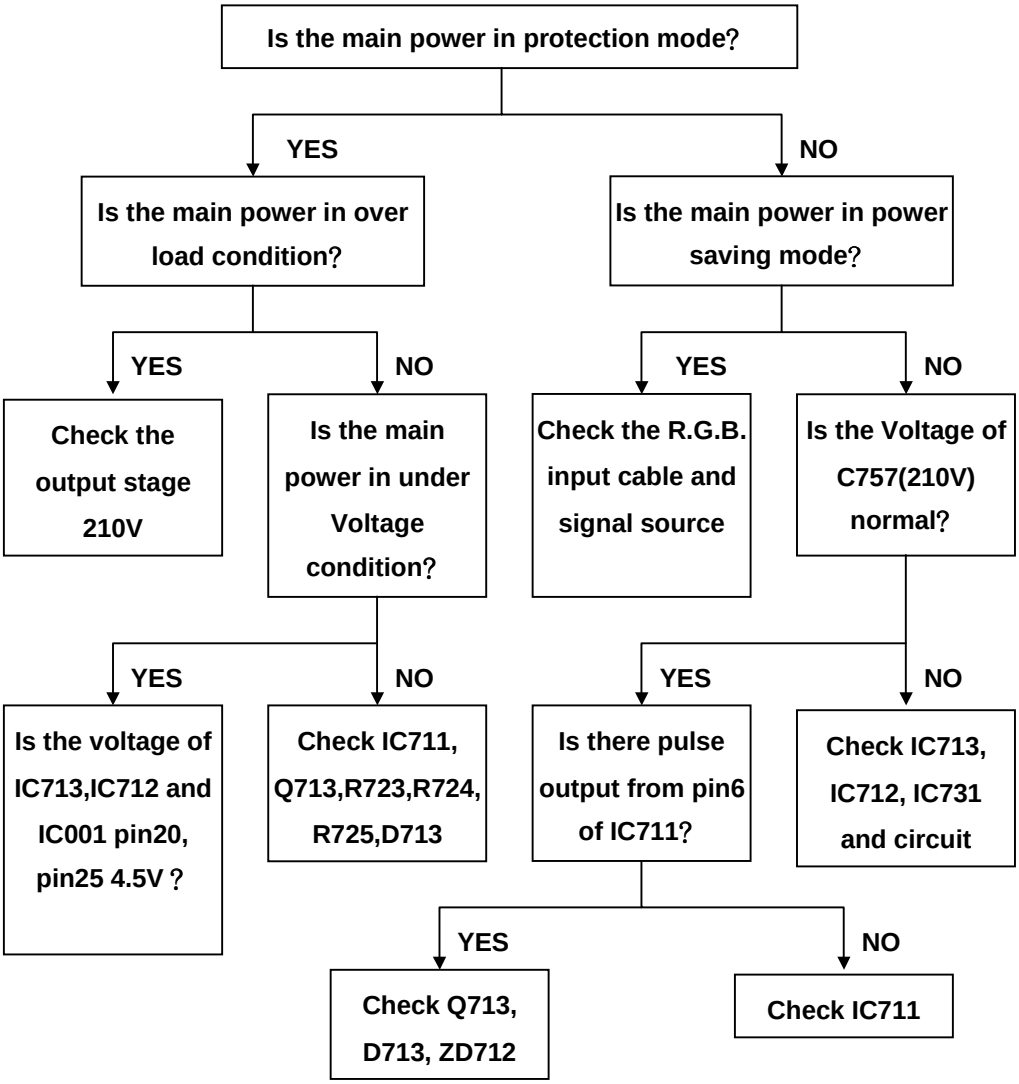

2. POOR LOAD REGULATION

3. OVER VOLTAGE

(1) 210V

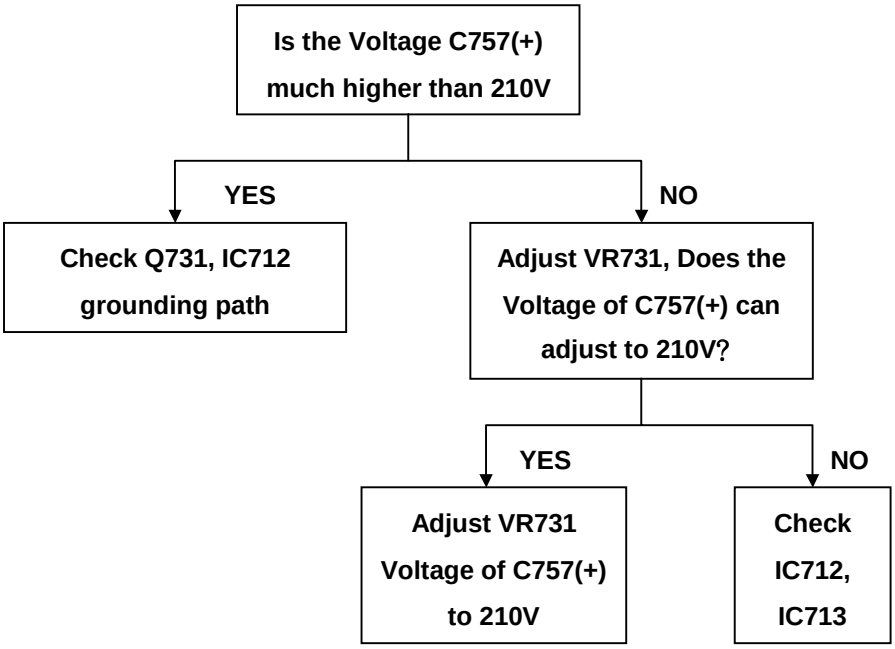
Is the Voltage C757(+) much higher than 210V
YES
NO
Check Q731, IC712 grounding path
Adjust VR731, Does the Voltage of C757(+) can adjust to 210V?
YES
NO
Adjust VR731 Voltage of C757(+) to 210V
Check IC712, IC713

(2) 6.3V

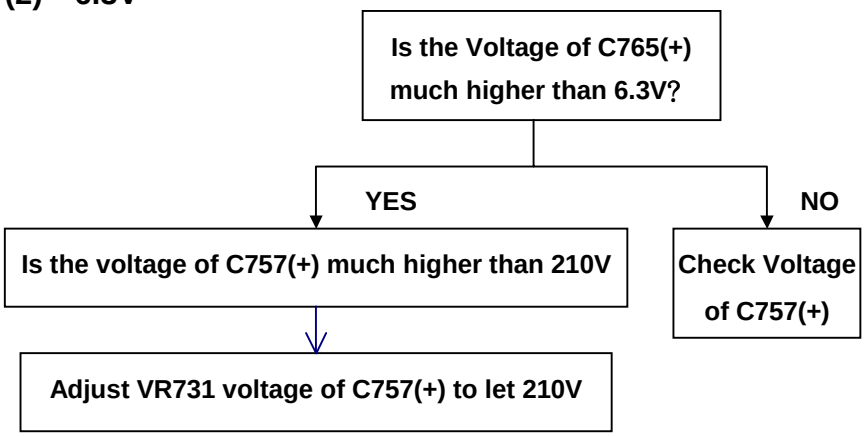
Is the Voltage of C765(+) much higher than 6.3V?
YES
NO
Is the voltage of C757(+) much higher than 210V
Check Voltage of C757(+)
Adjust VR731 voltage of C757(+) to let 210V

4. THE VOLTAGE OF HEATER LOWER THAN 5.8V



5. THE PICTURE FROM R.G.B. OUTPUT IS NOT CLEAR

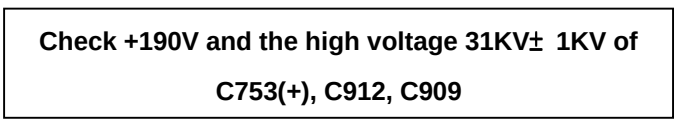

DEF.

1. NO RASTER(NO SOUND)

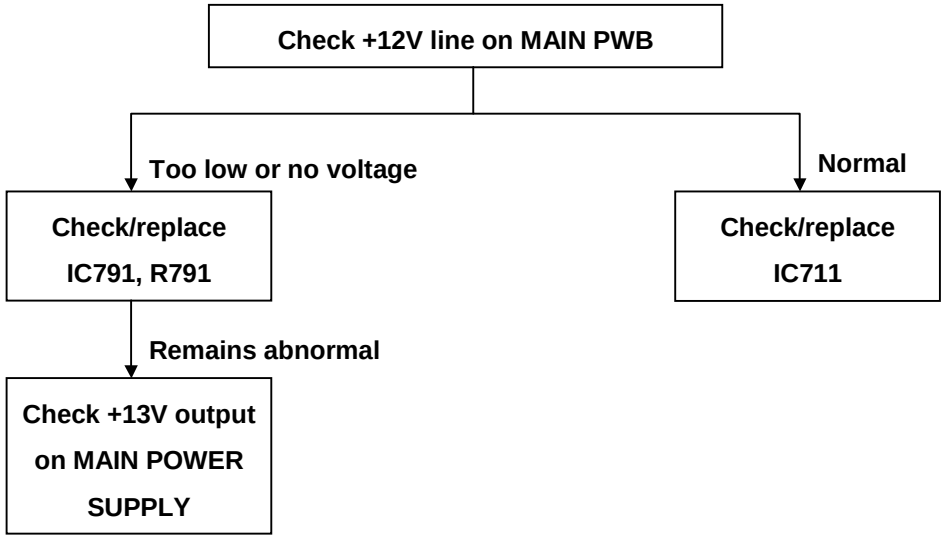

2. NO RASTER(SOUND IS NORMAL)

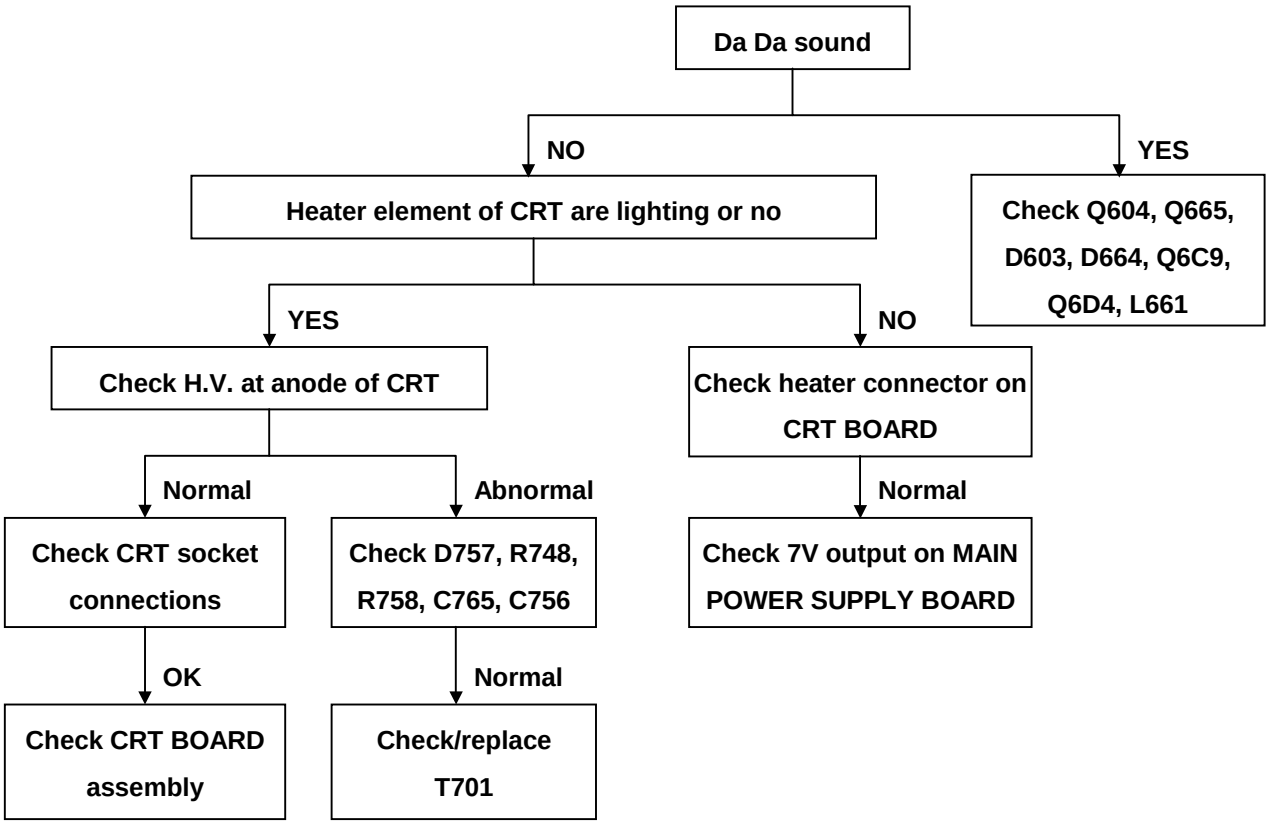

3. ONE HORIZONTAL LINE RASTER (NO VERTICAL SCAN)

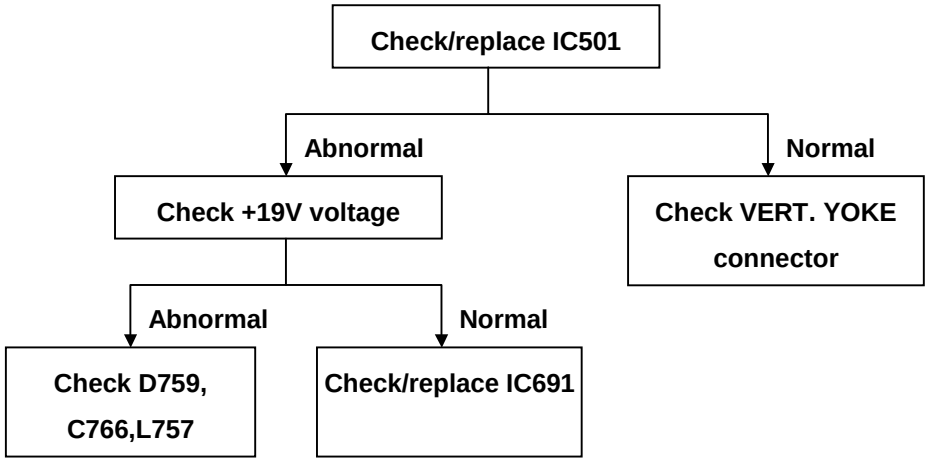

4. ONE VERTICAL LINE RASTER (NO HORIZONTAL SCAN)

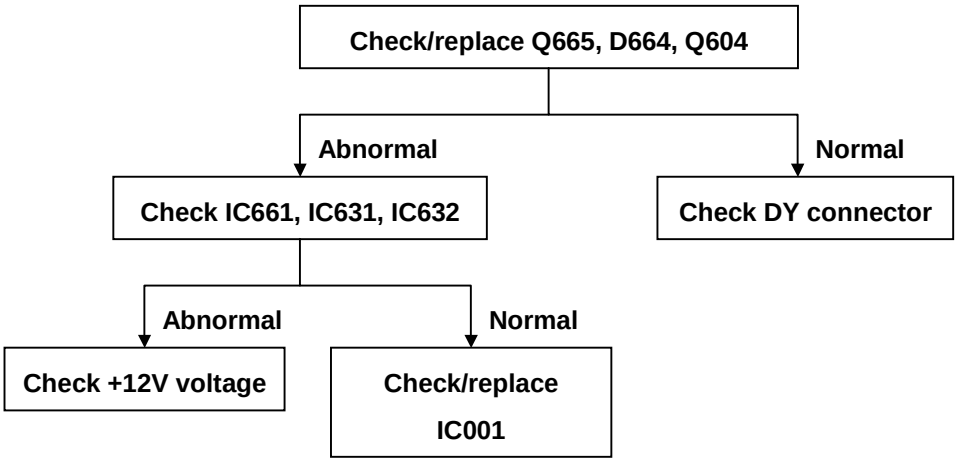

5. ABNORMAL CORNER FOCUS (ABNORMAL DYNAMIC FOCUS)

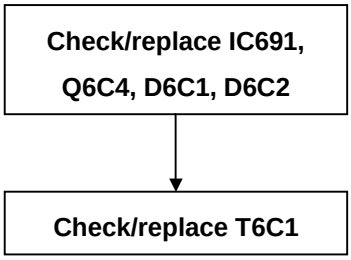

6. RASTER DISTORTION (SIDE PIN DISTORTION)

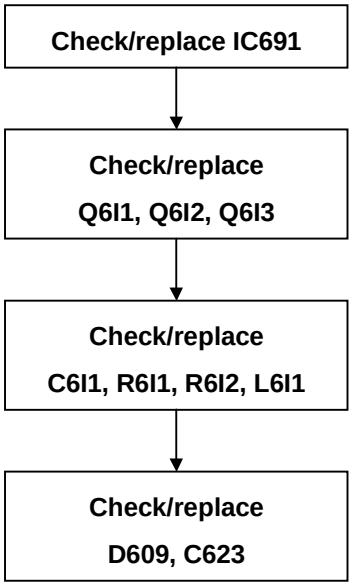

7. OUT OF HORIZONTAL/VERTICAL SYNC.

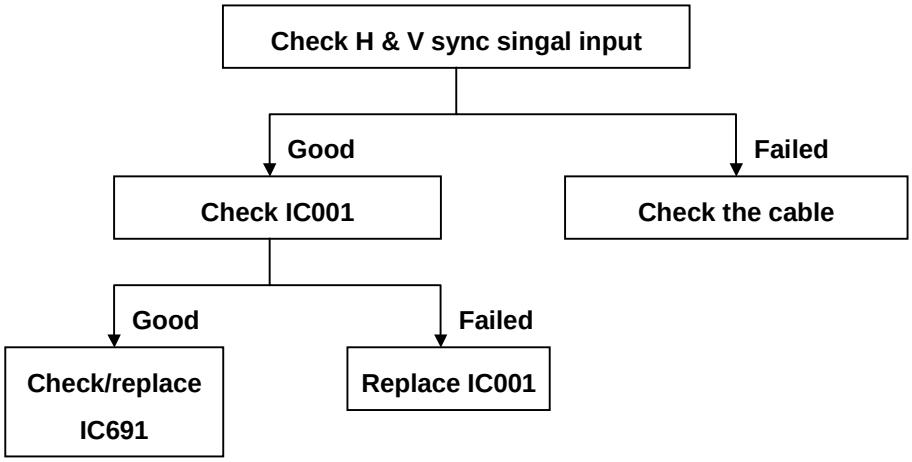

VIDEO

1. NO POWER

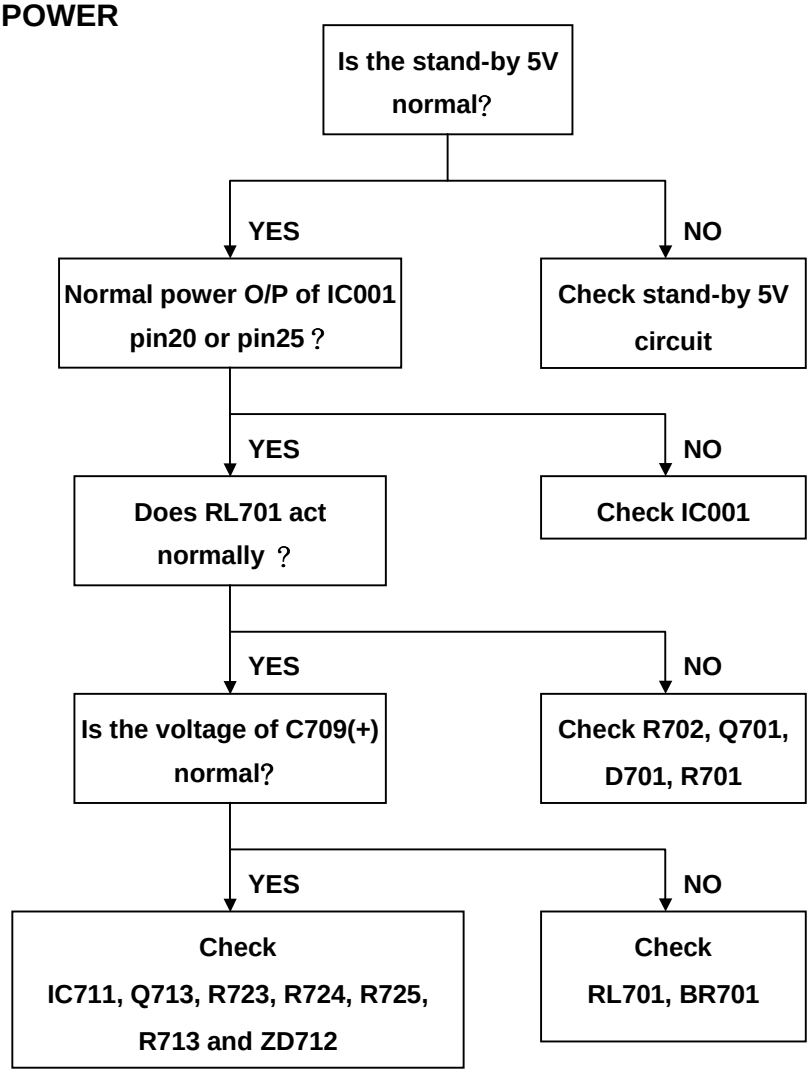

2. NO OSD (On Screen Display)

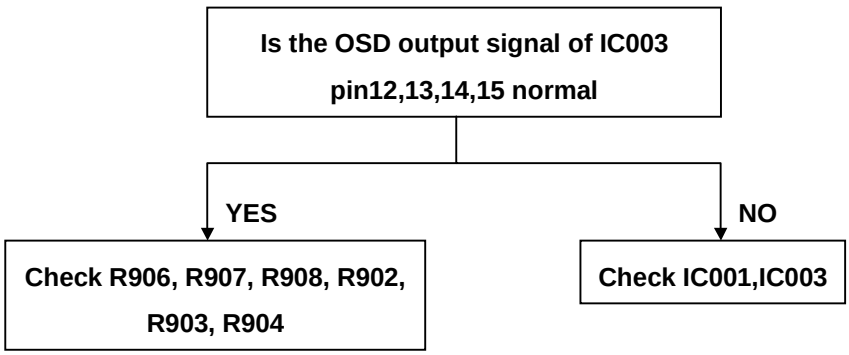

3. H-PHASE CAN NOT BE ADJUSTED.

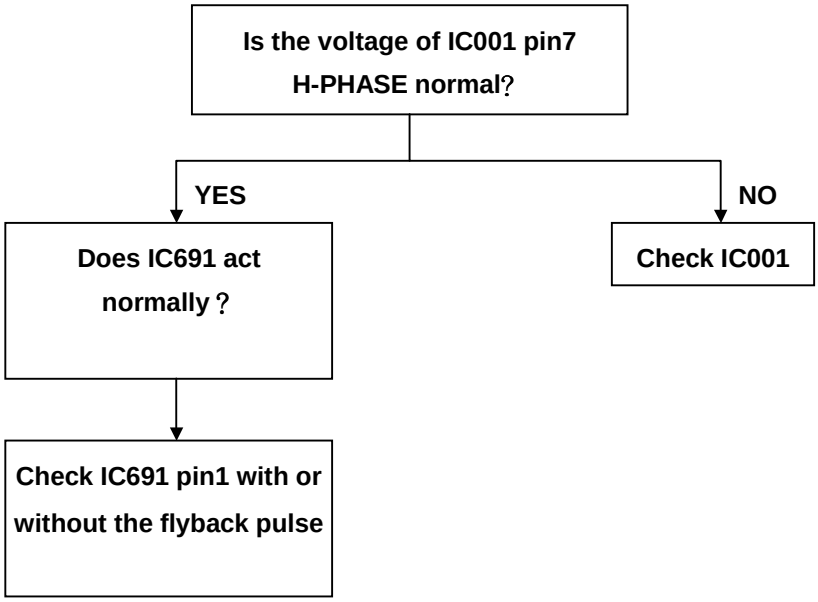

4. OUT OF VERT SYNCHRONIZATION IN RGB MODE.

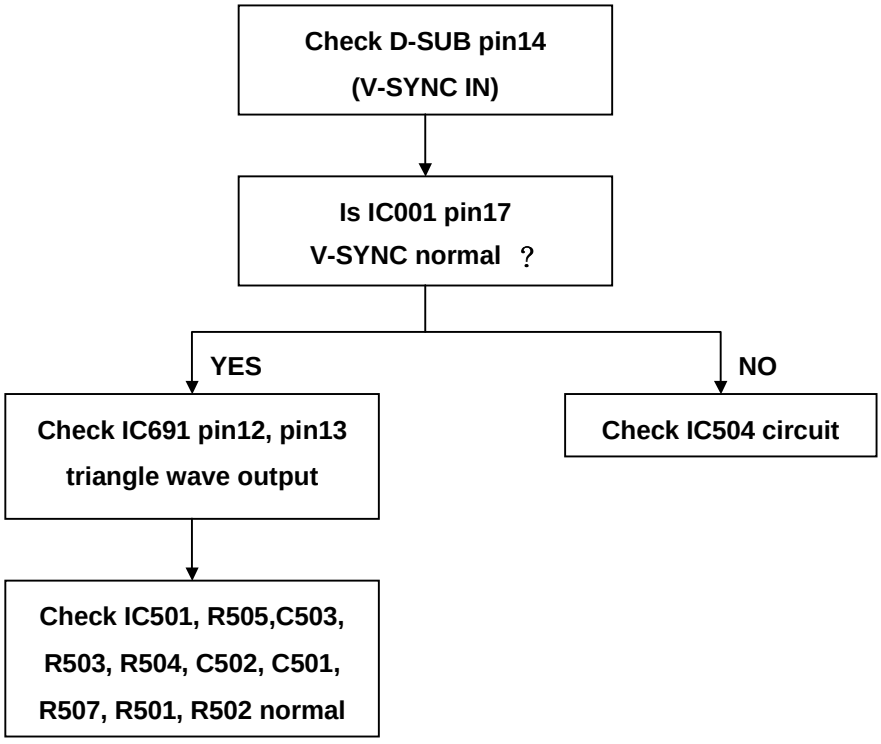

5. NO ROTATION FUNCTION

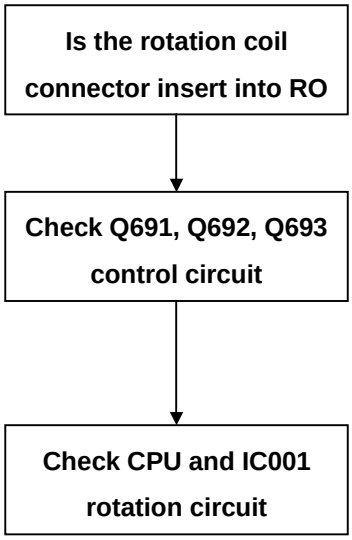
Is the rotation coil connector insert into RO
Check Q691, Q692, Q693 control circuit
Check CPU and IC001 rotation circuit

6. H-SIZE CAN NOT BE ADJUSTED

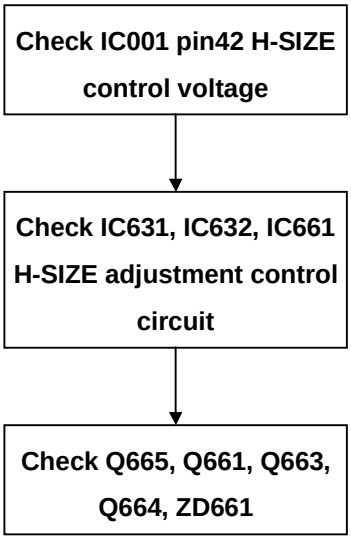
Check IC001 pin42 H-SIZE control voltage
Check IC631, IC632, IC661 H-SIZE adjustment control circuit
Check Q665, Q661, Q663, Q664, ZD661

7. NO VERTICAL SCAN

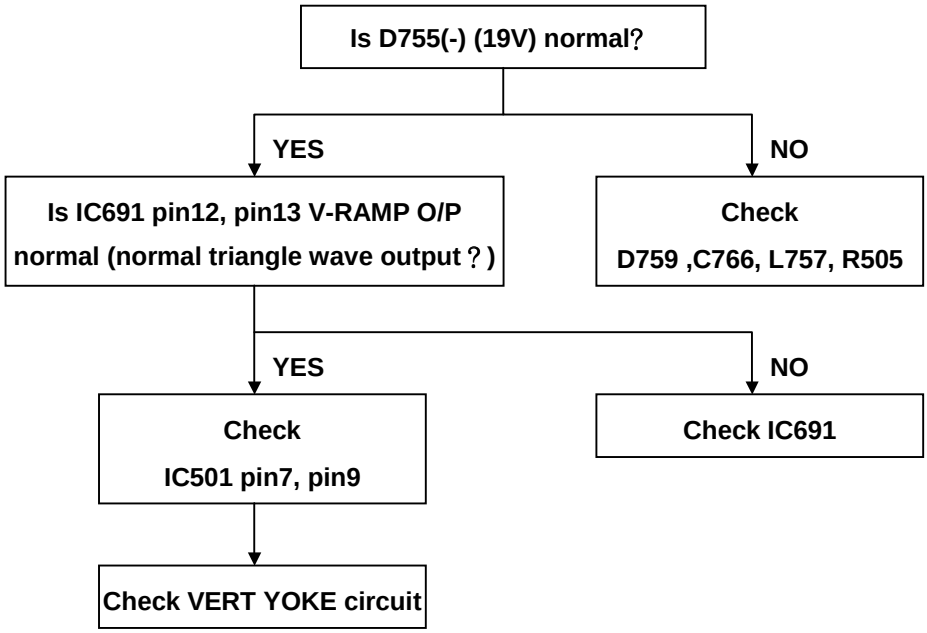

8. NO PICTURE

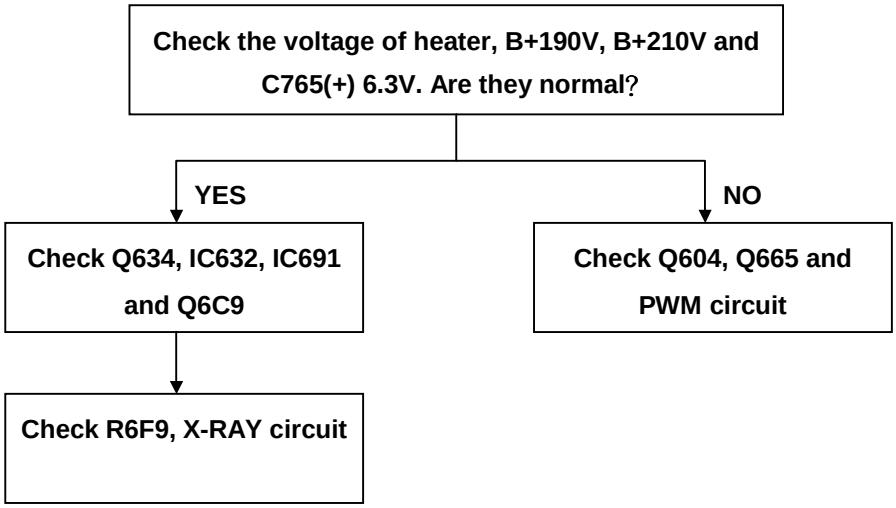
Check the voltage of heater, B+190V, B+210V and C765(+) 6.3V. Are they normal?
YES
NO
Check Q634, IC632, IC691 and Q6C9
Check Q604, Q665 and PWM circuit
Check R6F9, X-RAY circuit

9. NO VIDEO IN AV INPUT MODE

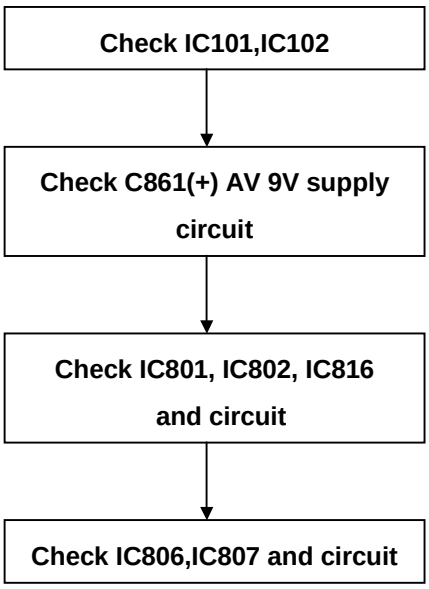

AUDIO

1. NO AUDIO OUTPUT

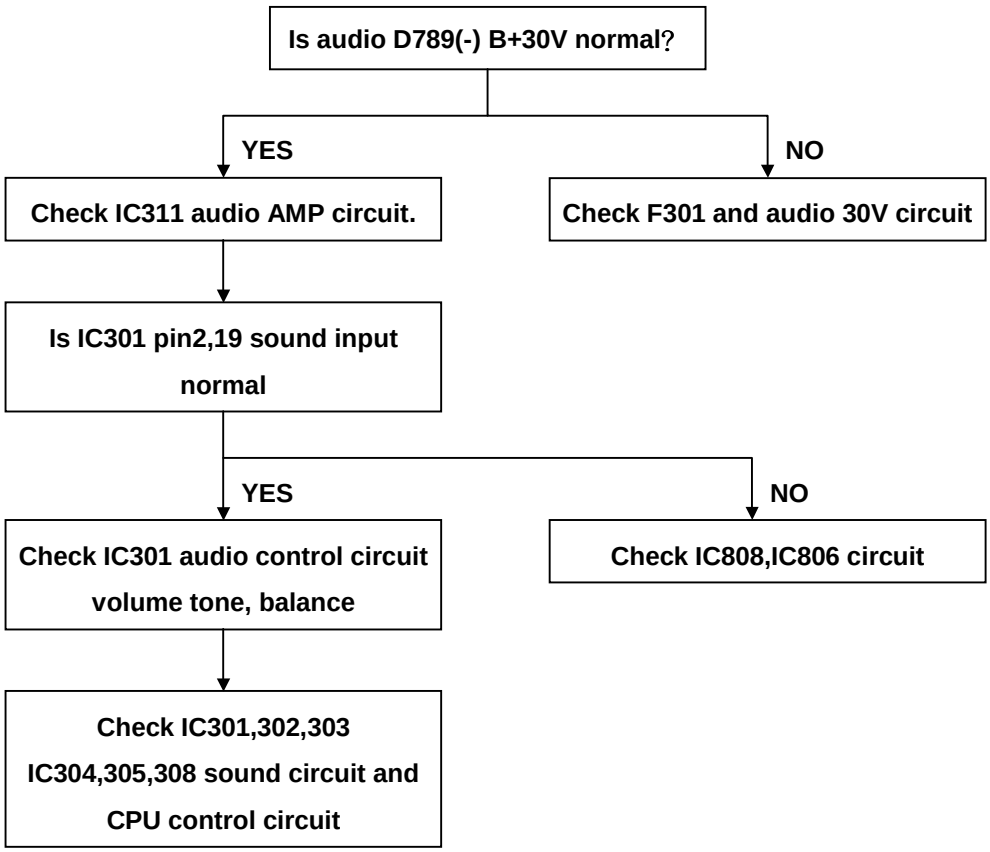
Is audio D789(-) B+30V normal?
YES
NO
Check IC311 audio AMP circuit.
Check F301 and audio 30V circuit
Is IC301 pin2,19 sound input normal
YES
NO
Check IC301 audio control circuit volume tone, balance
Check IC808,IC806 circuit
Check IC301,302,303 IC304,305,308 sound circuit and CPU control circuit

SPECIFICATION VER1.0

1. SCOPE

These specifications describe all the characteristics of the 34 inch color monitor.

2. ELECTRICAL REQUIREMENTS

2.1. Cathode ray tube

a. Tube size	**34 inch (4:3)**
b. Dot pitch	**H = 0.8 mm (center)**
c. Light transmission	**35.5% typical**
d. CRT TYPE NAME	**TOSHIBA**

2.2. Power

a. Input voltage	**100 ~ 240 Vac , 50 / 60 Hz**
b. Input current	**3 A at 110 Vac / 60 Hz**
c. Inrush current	**50 A**
d. Power consumption	**220 Watts**
e. Line regulation	**95 to 145 Vac / 60 Hz ~ 190 to 255 Vac / 50Hz**
f. Stand-by	**less than 10 watts**

2.3. Input signal

2.3.1 Video signal

a. Type	**Analog**
b. Polarity	**Positive**
c. Amplitude	**0.714 V_{P-P}**
d. Input impedance	**75 ohms**
e. Dot rate	**75M Hz (Max.)**

2.3.2 Horizontal sync

a. Type	**TTL**
b. Polarity	**Positive or Negative**
c. Input impedance	**1K ohms**
d. Frequency	**RGB : 31KHz to 52KHz**
	AV,YCBCR : 15.734KHz (NTSC) / 60Hz
	: 15.625KHz (PAL) / 50Hz

2.3.3 Vertical sync

a. Type	**TTL**
b. Polarity	**Positive or negative**
c. Input impedance	**1K ohm (Min.)**
d. Frequency	**50 Hz to 120 Hz**

2.3.4 Connector type **15 pin D-SUB and RCA JACK and S-terminal**

2.3.5 Pin assignments for D-SUB connector

Pin 1 : RED	**Pin 6 : RED GND**	**Pin 11 : GND**
Pin 2 : GREEN	**Pin 7 : GREEN GND**	**Pin 12 : SDA**
Pin 3 : BLUE	**Pin 8 : BLUE GND**	**Pin 13 : H-SYNC**
Pin 4 : GND	**Pin 9 : NC**	**Pin 14 : V-SYNC**
Pin 5 : GND	**Pin 10 : GND**	**Pin 15 : SCL**

2.3.6 Preset timing chart

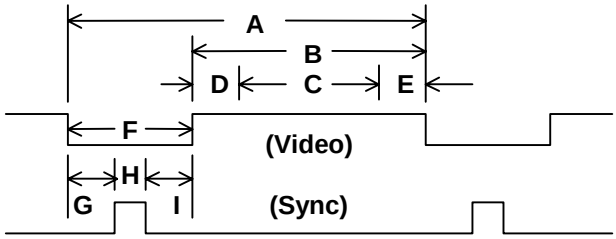

Item	Description :
A	Total time
B	Active display area including borders
C	Active display area excluding borders
D	Left / Top border
E	Right / bottom border
F	Blanking time
G	Front porch
H	Sync width
I	Back porch

The table below is required timings and technical description for the 34“ tube.

(H = 620 mm, V = 465 mm standard size)

Mode No.	1	2	3	4	5	6	7	8	9	
Resolution	640	640	720	640	800	800	640	800	1024	
&	480	480	400	480	600	600	480	600	768	
Refresh Rate	60	72	70	66.6	60.317	56.25	85	72	60	Hz
Pixel timing +/- .5%	39.722	31.746	35.311	33.06	25	27.8	36	50	15.385	n Sec
Horizontal visible	640	640	720	640	800	800	640	800	1024	Dots
Horizontal total	800	832	900	864	1056	1024	832	1040	1344	Dots
Horizontal front porch	16	16	18	64	40	24	56	56	40	Dots
Horizontal sync	96	40	108	64	128	72	56	120	145	Dots
Horizontal back porch	48	136	54	96	88	128	80	64	105	Dots
Hor blanking time	160	192	180	224	256	224	192	240	290	Dots
Vertical visible	480	480	400	480	600	600	480	601	768	Lines
Vertical total	525	520	449	525	628	625	509	667	806	Lines
Vertical front porch	10	1	12	3	1	1	1	1	1	Lines
Vertical sync	2	3	2	3	4	2	3	6	6	Lines
Vertical back porch	33	36	35	39	23	22	22	23	29	Lines
Vertical blanking time	45	40	49	45	28	25	26	30	36	Lines
Horizontal frequency	31.469	37.861	31.467	35	37.879	35.156	43.27	48.09	48.363	KHz
Vertical frequency	59.940	72.809	70.082	66.667	60.317	56.250	85	72	60	Hz
Vertical sync polarity	-	-	+	-	+	+	-	+	-	TTL
Hor sync polarity	-	-	-	+	+	+	-	+	-	TTL
Dot rate	25.2	31.2	28.3	30.204	40	35.97	36	50	65	MHz

2.4. Display performance requirements.
The data of display performance are measured based on the following conditions unless otherwise specified.

a. Ambient temperature	**25± 5 degree C**
b. Earth magnetic field :	**H : 0.00, V : 0.4± 0.05 Gauss**
c. Warm up period	**30 minutes minimum**
d. Line input voltage :	**Nominal 120 Vac / 60 Hz ~ 220 Vac / 50 Hz**
e. Unit facing direction	**With CRT screen facing east**
f. Viewing distance	**Distance from screen is 3.5m**
g. Display mode	**Test with full white pattern of mode 1 if not specified.**
h. Brightness condition	**Press reloads button to set Brightness to center point and adjust contrast control to 15 FL.**
i. Heater voltage	**6.2± 0.3Vdc**
j. HV Operation	**31± 1KV**

2.4.1 Maximum Resolution **1024 dots x 768 lines (non-interlace)**

2.4.2 Horizontal size (Standard) **620± 8 mm (for mode 1～9)**
Vertical size (Standard) **465± 8 mm (for mode 1～9)**

2.4.2.1 Horizontal size (max) **Mode 1-6 ≧ Over-scan**
Vertical size (max) **Mode 7-9 ≧ full-scan**

2.4.3 Size thermal drift **Within ± 8 mm**
(The size drift is being compared between the range of operating and ambient temperature.)

2.4.4 Size regulation
1. Less than 7 mm (MODE 1 → MODE 6)
(The size regulation is being compared the size change between the max. and min. brightness level.)
2. Less than 7 mm (MODE 7 → MODE 9)
(The size regulation is being compared the size change between the recall. and min. brightness level.)

2.4.5 Maximum brightness level

a. Full white pattern	**24± 5 FL at the screen center.** **(While pressing reload button to set contrast and brightness control at max.)**
b. 100% center block white pattern	**85± 5 FL** **(While pressing reload button to set contrast and brightness control at max.)**
c. Minimum brightness level (ALL WHITE PATTERN)	**With the contrast at min and brightness at central. Less than 5 FL.**
d. Raster background	**0.5 FL± 0.3 FL.** **(With the contrast max, brightness at max and black signal)**

2.4.6 Brightness uniformity
(Test with five circle mosaic pattern and set the brightness level of center circle at 15FL.)

$$\frac{\text{Brightness (corner circle)}}{\text{Brightness (center)}} > 50\%$$

2.4.7 Linearity
(Test with cross-hatch pattern. H: 17 Line, V: 13 Line)

Less than 15% for both H & V

$$\left(\frac{X(max.) - X(min.)}{X(max.)} X100\%\right) \leqq 15\%$$

2.4.8 Distortions requirement

a. Total Geometric distortion (See FIG. 1)	**TOP & BOTTOM**	**≦8 mm**
	LEFT & RIGHT	**≦8 mm**
b. Barrel (See FIG. 2)	**TOP & BOTTOM**	**≦6 mm**
	LEFT & RIGHT	**≦6 mm**

2.4.9 Tilt (Raster Rotation)

Less than ± 4 mm
(The tilt is being Compared between the horizontal center line of the image with respect to that of the bezel.)

2.4.10 Misconvergence
(See FIG. 5)

Zone A: 1.0 mm (465 mm)
Zone B: 1.5 mm (Within the image area of 620 mm x 465 mm except zone A.)
Zone C: 1.8 mm (Except zone A and B.)

2.4.11 Focus
(with mode 1→mode 9) (Test with H character pattern.)

The individual dot and line of characters on the screen should be clearly distinguishable. (Setting the Cut-off raster brightness level at H pattern.)

2.4.12 CRT quality

The screen & faceplate blemishes requirement is defined based on CRT specification.

2.4.13 Color temperature
(PATTERN=ALL WHITE PATTERN.)

X : 0.270± 0.030
Y : 0.270± 0.030

2.4.14 Color tracking
(Test full white pattern.)

X : X_0± 0.030
Y : Y_0± 0.030
brightness=128,change contrast control range from 4.5 FL to max

2.4.15 Internal service controls :

HV-ADJUST (31± 1KV) **H-Center** **DC B+ ADJUST (210± 1V)**
FBT SCREEN KNOB **FBT FOCUS**

2.4.16 External user controls : (With OSD Control)

RGB :	BRIGHTNESS	CONTRAST	V-SIZE	H-CENTER	H-WIDTH
	H-PHASE	PINCUSHION	TRAPEZOID	PARALLELOGRAM	ROTATION
	R-GAIN	G-GAIN	B-GAIN		
AV,YCBCR:	BRIGHTNESS	CONTRAST	COLOR	TINT	SHARPNESS
	R-GAIN	G-GAIN	B-GAIN		
COMMON :	POWER	MUTE	DEGAUSS	WOOFER VOLUME	RECALL
	INPUT	BASS	TREBLE	BALANCE	
FRONT PANEL FUNCTION KEY :		VOLUME +/-		INPUT SELECT	DEGAUSS,
		MENU +/-		POWER SWITCH	

3. MECHANICAL REQUIREMENTS

3.1. Unit dimension (with base) : W (866) x H (718) x D (583) mm
Packaging dimension : W (1030) x H (870) x D (760) mm

3.2. Net weight of unit : 71 Kgs

4. Environmental requirements

4.1. Non-operating

a. Ambient temperature - 15 degree C to 50 degree C (5 degree F to 122 degree F)
b. Relative humidity 10% RH to 95% RH (non-condensing)
c. Altitude 10,000 feet

4.2. Operating

a. Ambient temperature 0 degree C to 40 degree C (32 degree F to 104 degree F)
b. Relative humidity 10% RH to 95% RH (non-condensing)
c. Altitude 10,000 feet

5. Reliability requirement
The MTBF needs 40000 hours (excluding tube) under operating at 25± 5 degree C (77± 41 degree F) ambient temperature also with the normal characters filled within the whole image screen.

6. Regulatory requirements

6.1. Safety requirement.
The unit shall conform to the following safety regulatory standards.

a.	UL 1950		Safety of Information Technology Equipment Including Electrical Business Equipment
b.	CSA No.	22.2 950-M89	Safety of Information Technology Equipment Including Electrical Business Equipment
c.	TUV No.	EN 60950 EN 60065	Safety of Information Technology Equipment Including Electrical Business Equipment

6.2. X Radiation requirement.
The unit shall conform to the following X-ray regulatory standards and must not emit more than 0.5 mR/H of ionizing radiation under normal operation or under a fault condition.

a. DHHS 21 CFR 1020.10 Department of Health and Human Services Radiation Performance Standard; Title 21 CFR subject J, for Radiological Health (US)

6.3. Emission requirements.
The unit shall meet the EMI limits in all screen modes. For EMI testing, the unit must be filled with a screen pattern consisting of scrolling capital "H" characters also the brightness and contrast VR will be adjusted to max. level.

a. FCC Class B FCC part 15, Subpart J, Class B (US)

7. POWER MANAGEMENT:

Mode	H-sync	V-sync	Video	Power dissipation
Normal	pulse	pulse	active	normal power
Stand-by	no pulse	no pulse	no video	power off
Power saving	pulse	no pulse	blanked	less than 30 watts
	no pulse	pulse		

This monitor is Energy star compliant when used with a computer equipped with DPMS.
Note: The power indicator LED color is green in normal state, red in stand-by and yellow in power saving state.

Attachment: Internal reference specification.
The following specifications are provided to Production Engineering and Quality Assurance Departments for factory internal control only.

Item no. and contents of product specification		Customer requirements
2.4.2	Horizontal size / vertical size	620 / 465 mm± 8 mm
2.4.3	Size thermal drift	within 8 mm
2.4.4	Size regulation	within 7 mm
2.4.5	a. Max. brightness level (full white) b. Max. brightness level (100% center block white pattern)	24± 5 FL 85± 5 FL (MODE 1)
2.4.6	Brightness uniformity	greater than 50%
2.4.7	Linearity	H ≦ 15% V ≦ 15%
2.4.8	a. Geometric distortion TOP : BOTTOM : b. Barrel TOP : BOTTOM :	within 8 mm within 8 mm within 6 mm within 6 mm
2.4.9	Tilt (Raster Rotation)	within 4 mm
2.4.10	Misconvergence	within A:1.0, B:1.5, C: 1.8
2.4.11	Focus	Reference page 5
2.3.13	Color temperature	X : 0.270± 0.030 Y : 0.270± 0.030
2.3.14	Color tracking	X : X_0± 0.030 Y : Y_0± 0.030
7.	POWER MANAGEMENT : a. Power saving	 P_C < 30 watts

AV , YCBCR SECTION: (ACCORDING TO CTV RULES)
video signal compatibility：NTSC / PAL

1. Picture quality

1.1. Resolution (center)
Contrast and brightness is adjusted so that the 25% gray bar is at cut off of CRT 300 lines min.

2. Linearity # formula: (max. - min.) / max. # (AV ,YCBCR SECTION)

Vertical	**10%**	**13% max.**
Horizontal	**10%**	**14% max.**

3. Sound (tone & balance at central position)

3.1. Residual hum (at volume control max.) 500uW max.

3.2. Practical max. audio output (at 10% THD max.)

1.3V_{P-P}	**1K Hz input**	**10W min. / 7 ohm**

3.3. Audio fidelity (400 Hz 0db, Corrected for emphasis characteristics)

Woofer off	**100 Hz**	**1 dB**	**3 dB**
Woofer off	**10K Hz**	**-1 dB**	**3 dB**

3.4. Sound distortion (at 250mW 1K Hz) 1% max. with LPF(15.734KHz)

4. Video and audio (full load)

4.1. Video signal output 1.0 V_{P-P} ± 0.2 V_{P-P}.
(input signal at 1.0 V_{P-P} ± 0.2 V_{P-P})

4.2. Audio signal output 1.0 V_{P-P} ± 0.2 V_{P-P}.
(input signal at 1.0 V_{P-P} ± 0.2 V_{P-P})

5. Total Geometric Distortion (AV ,YCBCR SECTION)

5.1. Pincushion(FIG. 4)

Top-bottom	**3% max.**
Left-right	**3% max.**

***Pattern = crosshatch**

5.2. Trapezoid (FIG. 3)

Horizontal	**3.0% max.**
Vertical	**3.0% max.**

FIG. 1 Total Geometric Distortion:

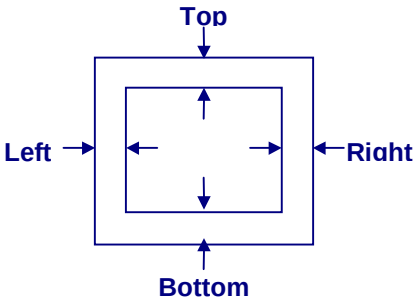

FIG. 2 Barrel:

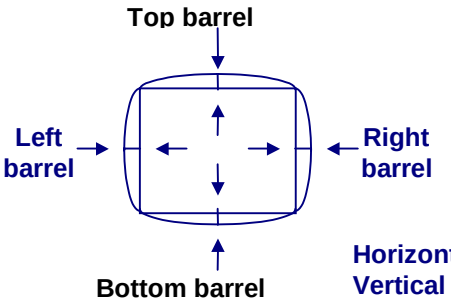

FIG. 3 Trapezoid:



Horizontal =(AD-BC) / (AD+BC)x100
Vertical =(AB-DC) / (AB+DC)x100

FIG. 4 PINCUSHION: (AV)

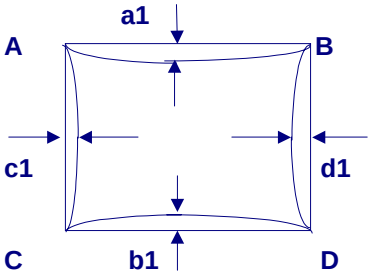

Pattern = crosshatch

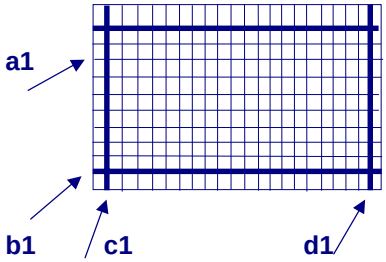

FIG.5 Misconvergence

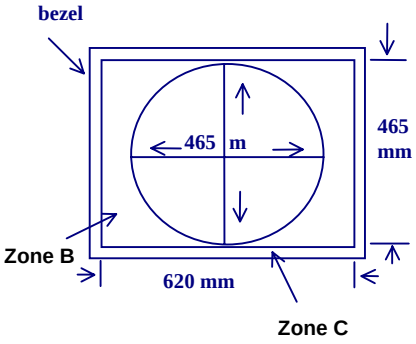

Top-bottom=2(a1+b1)/(AC+BD)x100%
Left-right =2(c1+d1)/(AB+CD)x100%

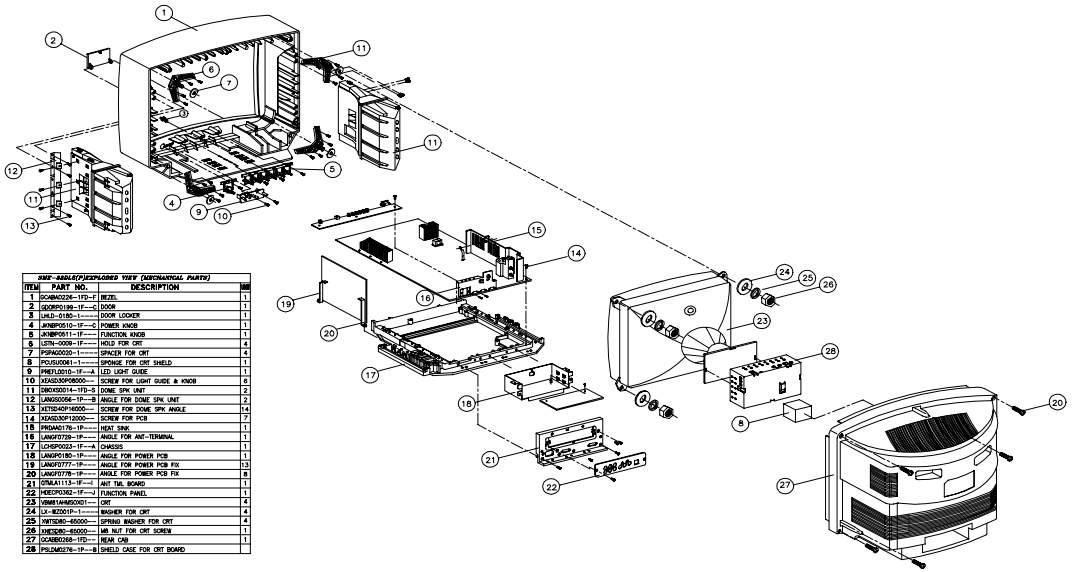

SMK-AA0L47(EXPLODED VIEW (MECHANICAL PARTS))			
ITEM	PART NO.	DESCRIPTION	MK
1	SCABA0226--1FD--F	BEZEL	1
2	GDORP0196--1F---C	DOOR	1
3	LHLD--0180-1------	DOOR LOCKER	1
4	AKNBP0510--1F---C	POWER KNOB	1
5	AKNBP0511--1F----	FUNCTION KNOB	1
6	LSTN--0009--1F----	HOLD FOR CRT	4
7	PSPAG0020-1------	SPACER FOR CRT	4
8	PCUSU0061--1------	SPONGE FOR CRT SHIELD	1
9	PMDTL0010--1F---A	LED LIGHT GUIDE	1
10	XTAS3.0PD8000---	SCREW FOR LIGHT GUIDE & KNOB	6
11	DBKX50014--1FD--S	DOME SPK UNIT	2
12	LANG0056--1P---S	ANGLE FOR DOME SPK UNIT	2
13	XTTS3.0P16000---	SCREW FOR DOME SPK ANGLE	14
14	XTAS3.0P12000---	SCREW FOR PCB	7
15	PRDA0178--1P------	HEAT SINK	1
16	LANGF0729--1P----	ANGLE FOR ANT-TERMINAL	1
17	LCHSP0023--1F---A	CHASSIS	1
18	LANGP0180--1P----	ANGLE FOR POWER PCB	1
19	LANGF0777--1P----	ANGLE FOR POWER PCB FIX	13
20	LANGF0778--1P----	ANGLE FOR POWER PCB FIX	8
21	GTNLA1113--1F---I	ANT TML BOARD	1
22	HDECP0362--1F---J	FUNCTION PANEL	1
23	VBM61A4650X01---	CRT	4
24	LX--WZ0017--1------	WASHER FOR CRT	4
25	XWTS3D0--65000---	SPRING WASHER FOR CRT	4
26	XNES3D0--65000---	M3 NUT FOR CRT SCREW	1
27	GCABB0268--1FD---	REAR CAB	1
28	PSLDM0276--1P---B	SHIELD CASE FOR CRT BOARD	

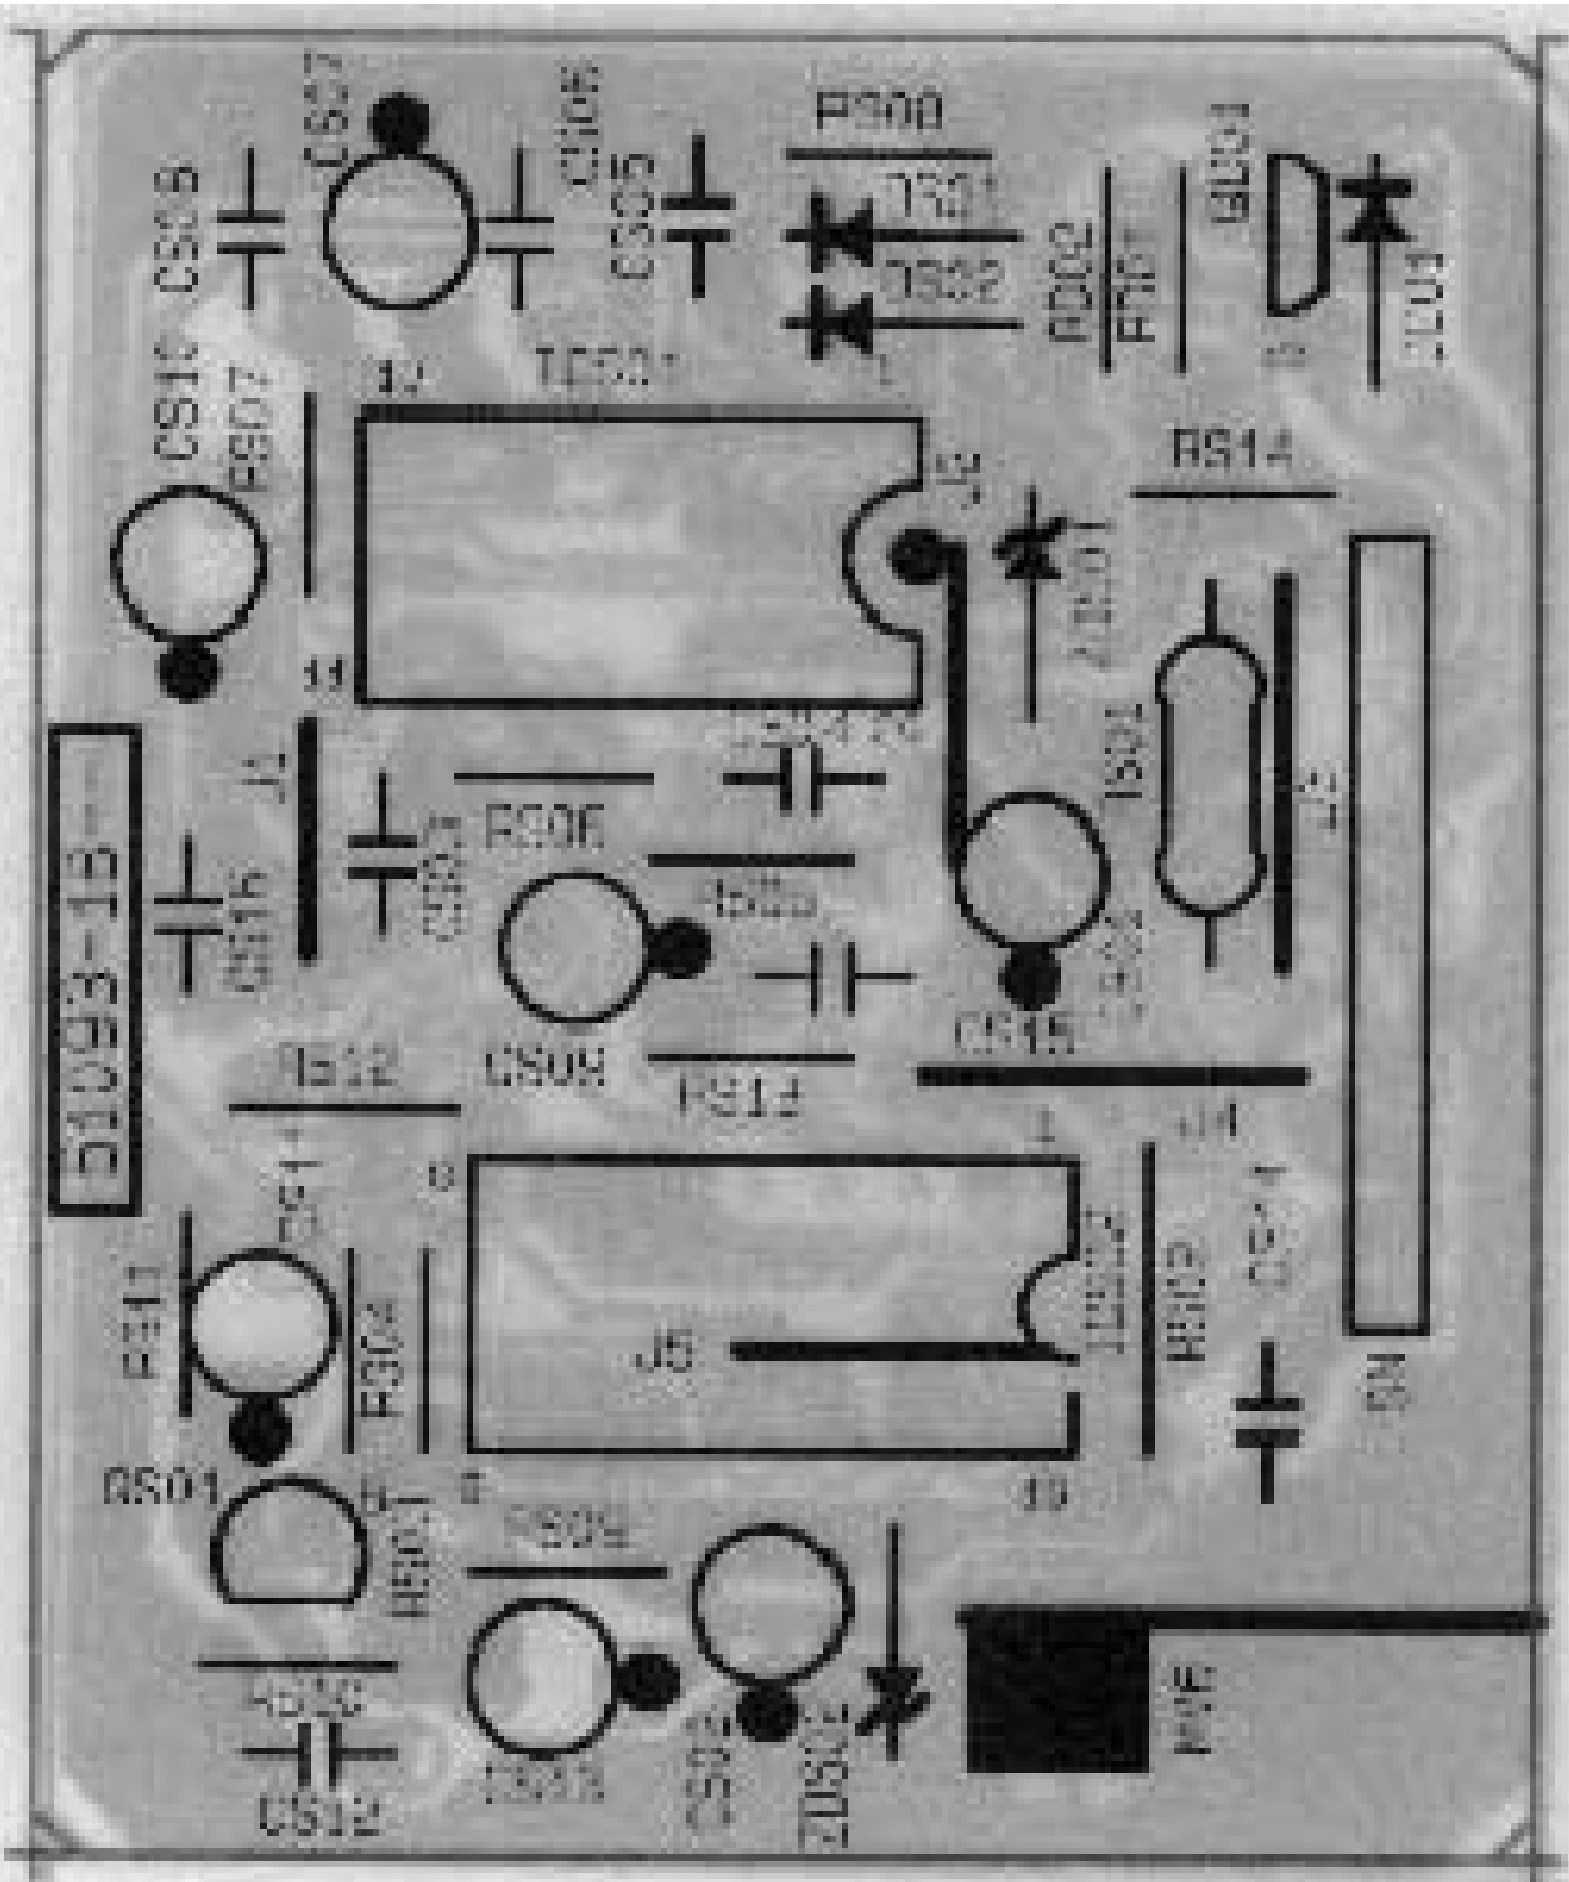
P300
J1
J2
J3
J4
J5
CN
ANT

C4
C3
C2
C1
C10
C8
C9
J1
R5
54089-1B

ES-90-8-06 0006213002501 COMP SIDE SSI
CU 50.IN 74.127

APWB51059-1B---
R042
R388
R387
R386
C803
C798
IC717
T731
D798
R785
C785
C786
C787
C788
C789
C790
C791
C792
C793
C794
C795
C796
C797
C799
C800
C801
C802
C804
C805
C806
C807
C808
C809
C810
C811
C812
C813
C814
C815
C816
C817
C818
C819
C820
C821
C822
C823
C824
C825
C826
C827
C828
C829
C830
C831
C832
C833
C834
C835
C836
C837
C838
C839
C840
C841
C842
C843

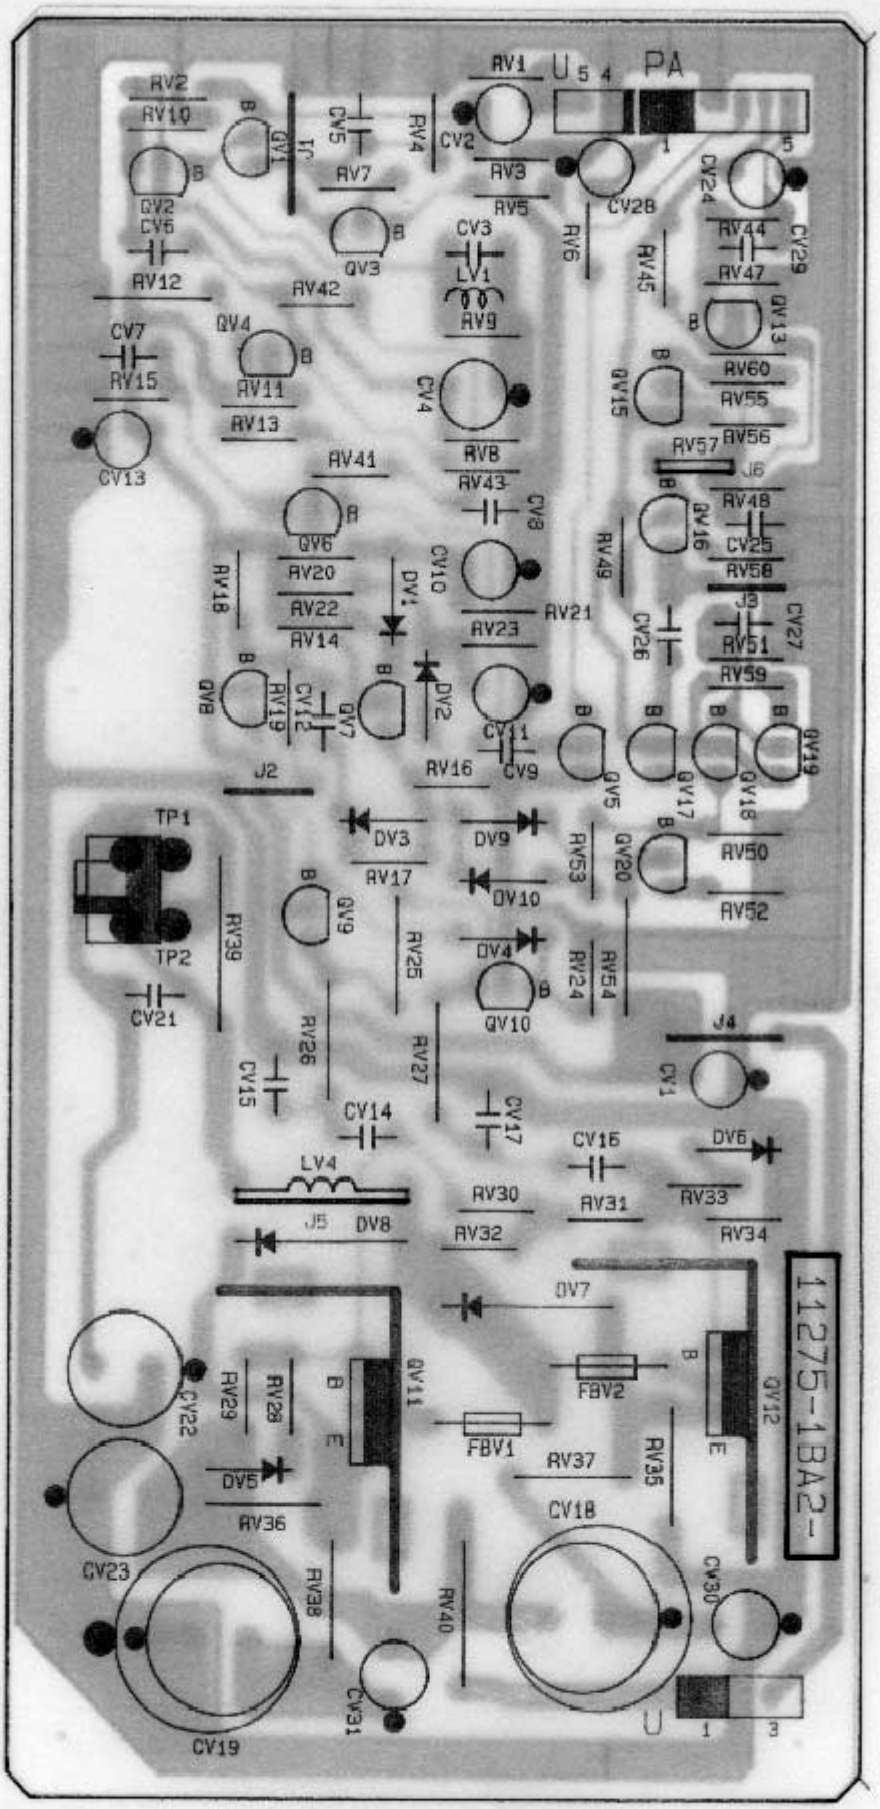
PA
U 5 4
1
5
RV1
RV2
RV10
RV3
RV4
RV5
RV6
RV7
RV8
RV9
RV11
RV12
RV13
RV15
RV16
RV18
RV19
RV20
RV22
RV14
RV23
RV21
RV17
RV24
RV25
RV26
RV27
RV28
RV29
RV30
RV31
RV32
RV33
RV34
RV35
RV36
RV37
RV38
RV39
RV40
RV41
RV42
RV43
RV44
RV45
RV47
RV48
RV49
RV50
RV51
RV52
RV53
RV54
RV55
RV56
RV57
RV58
RV59
RV60
CV1
CV2
CV3
CV4
CV5
CV6
CV7
CV8
CV9
CV10
CV11
CV12
CV13
CV14
CV15
CV16
CV17
CV18
CV19
CV21
CV22
CV23
CV24
CV25
CV26
CV27
CV28
CV29
CV30
CV31
QV1
QV2
QV3
QV4
QV5
QV6
QV7
QV8
QV9
QV10
QV11
QV12
QV13
QV15
QV16
QV17
QV18
QV19
QV20
DV1
DV2
DV3
DV4
DV5
DV6
DV7
DV8
DV9
DV10
FBV1
FBV2
LV1
LV4
TP1
TP2
J2
J3
J4
J5
J6
B
E
1
3
11275-1BA2-

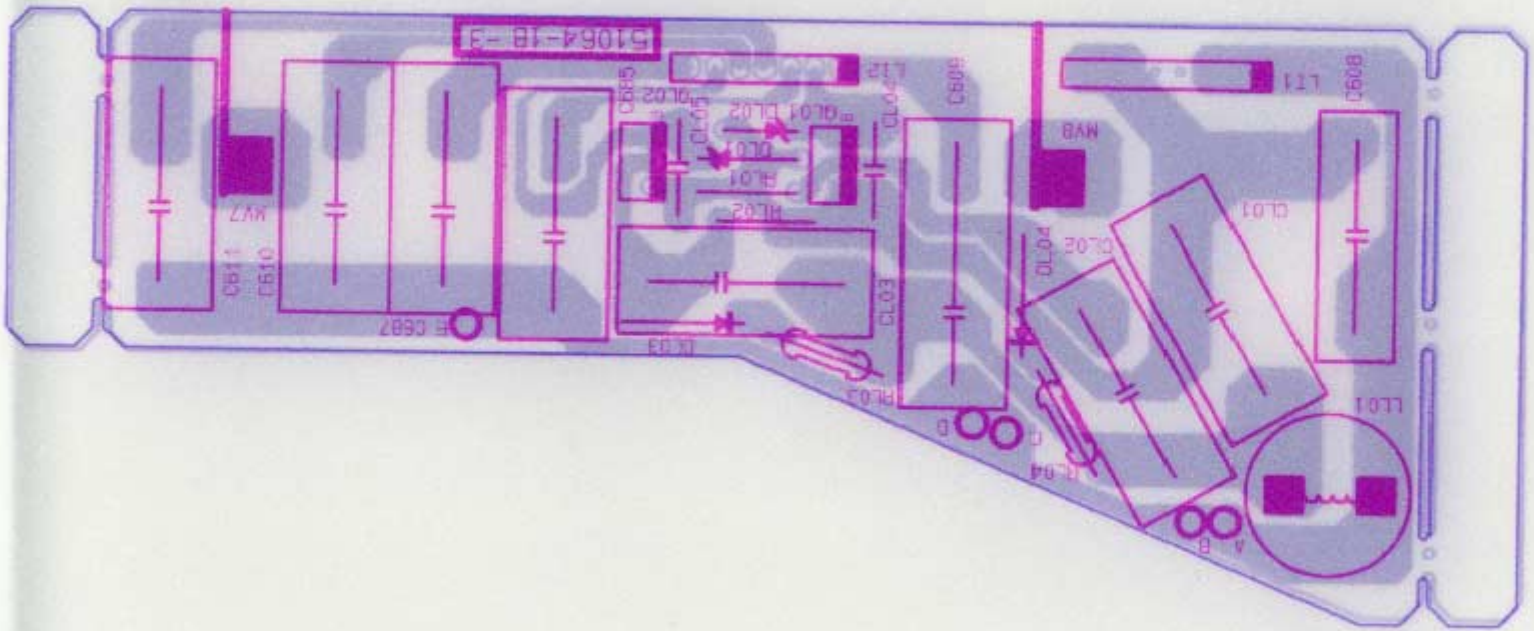
5106A-1B-J
MY7
MY8
C609
C608
L11
L12
CL01
CL02
CL03
CL04
CL05
CL06
CL07
CL08
CL09
CL10
CL11
CL12
CL13
CL14
CL15
CL16
CL17
CL18
CL19
CL20
CL21
CL22
CL23
CL24
CL25
CL26
CL27
CL28
CL29
CL30
CL31
CL32
CL33
CL34
CL35
CL36
CL37
CL38
CL39
CL40
CL41
CL42
CL43
CL44
CL45
CL46
CL47
CL48
CL49
CL50
CL51
CL52
CL53
CL54
CL55
CL56
CL57
CL58
CL59
CL60
CL61
CL62
CL63
CL64
CL65
CL66
CL67
CL68
CL69
CL70
CL71
CL72
CL73
CL74
CL75
CL76
CL77
CL78
CL79
CL80
CL81
CL82
CL83
CL84
CL85
CL86
CL87
CL88
CL89
CL90
CL91
CL92
CL93
CL94
CL95
CL96
CL97
CL98
CL99
CL100
CL101
CL102
CL103
CL104
CL105
CL106
CL107
CL108
CL109
CL110
CL111
CL112
CL113
CL114
CL115
CL116
CL117
CL118
CL119
CL120
CL121
CL122
CL123
CL124
CL125
CL126
CL127
CL128
CL129
CL130
CL131
CL132
CL133
CL134
CL135
CL136
CL137
CL138
CL139
CL140
CL141
CL142
CL143
CL144
CL145
CL146
CL147
CL148
CL149
CL150
CL151
CL152
CL153
CL154
CL155
CL156
CL157
CL158
CL159
CL160
CL161
CL162
CL163
CL164
CL165
CL166
CL167
CL168
CL169
CL170
CL171
CL172
CL173
CL174
CL175
CL176
CL177
CL178
CL179
CL180
CL181
CL182
CL183
CL184
CL185
CL186
CL187
CL188
CL189
CL190
CL191
CL192
CL193
CL194
CL195
CL196
CL197
CL198
CL199
CL200
CL201
CL202
CL203
CL204
CL205
CL206
CL207
CL208
CL209
CL210
CL211
CL212
CL213
CL214
CL215
CL216
CL217
CL218
CL219
CL220
CL221
CL222
CL223
CL224
CL225
CL226
CL227
CL228
CL229
CL230
CL231
CL232
CL233
CL234
CL235
CL236
CL237
CL238
CL239
CL240
CL241
CL242
CL243
CL244
CL245
CL246
CL247
CL248
CL249
CL250
CL251
CL252
CL253
CL254
CL255
CL256
CL257
CL258
CL259
CL260
CL261
CL262
CL263
CL264
CL265
CL266
CL267
CL268
CL269
CL270
CL271
CL272
CL273
CL274
CL275
CL276
CL277
CL278
CL279
CL280
CL281
CL282
CL283
CL284
CL285
CL286
CL287
CL288
CL289
CL290
CL291
CL292
CL293
CL294
CL295
CL296
CL297
CL298
CL299
CL300
CL301
CL302
CL303
CL304
CL305
CL306
CL307
CL308
CL309
CL310
CL311
CL312
CL313
CL314
CL315
CL316
CL317
CL318
CL319
CL320
CL321
CL322
CL323
CL324
CL325
CL326
CL327
CL328
CL329
CL330
CL331
CL332
CL333
CL334
CL335
CL336
CL337
CL338
CL339
CL340
CL341
CL342
CL343
CL344
CL345
CL346
CL347
CL348
CL349
CL350
CL351
CL352
CL353
CL354
CL355
CL356
CL357
CL358
CL359
CL360
CL361
CL362
CL363
CL364
CL365
CL366
CL367
CL368
CL369
CL370
CL371
CL372
CL373
CL374
CL375
CL376
CL377
CL378
CL379
CL380
CL381
CL382
CL383
CL384
CL385
CL386
CL387
CL388
CL389
CL390
CL391
CL392
CL393
CL394
CL395
CL396
CL397
CL398
CL399
CL400
CL401
CL402
CL403
CL404
CL405
CL406
CL407
CL408
CL409
CL410
CL411
CL412
CL413
CL414
CL415
CL416
CL417
CL418
CL419
CL420
CL421
CL422
CL423
CL424
CL425
CL426
CL427
CL428
CL429
CL430
CL431
CL432
CL433
CL434
CL435
CL436
CL437
CL438
CL439
CL440
CL441
CL442
CL443
CL444
CL445
CL446
CL447
CL448
CL449
CL450
CL451
CL452
CL453
CL454
CL455
CL456
CL457
CL458
CL459
CL460
CL461
CL462
CL463
CL464
CL465
CL466
CL467
CL468
CL469
CL470
CL471
CL472
CL473
CL474
CL475
CL476
CL477
CL478
CL479
CL480
CL481
CL482
CL483
CL484
CL485
CL486
CL487
CL488
CL489
CL490
CL491
CL492
CL493
CL494
CL495
CL496
CL497
CL498
CL499
CL500
CL501
CL502
CL503
CL504
CL505
CL506
CL507
CL508
CL509
CL510
CL511
CL512
CL513
CL514
CL515
CL516
CL517
CL518
CL519
CL520
CL521
CL522
CL523
CL524
CL525
CL526
CL527
CL528
CL529
CL530
CL531
CL532
CL533
CL534
CL535
CL536
CL537
CL538
CL539
CL540
CL541
CL542
CL543
CL544
CL545
CL546
CL547
CL548
CL549
CL550
CL551
CL552
CL553
CL554
CL555
CL556
CL557
CL558
CL559
CL560
CL561
CL562
CL563
CL564
CL565
CL566
CL567
CL568
CL569
CL570
CL571
CL572
CL573
CL574
CL575
CL576
CL577
CL578
CL579
CL580
CL581
CL582
CL583
CL584
CL585
CL586
CL587
CL588
CL589
CL590
CL591
CL592
CL593
CL594
CL595
CL596
CL597
CL598
CL599
CL600
CL601
CL602
CL603
CL604
CL605
CL606
CL607
CL608
CL609
CL610
CL611
CL612
CL613
CL614
CL615
CL616
CL617
CL618
CL619
CL620
CL621
CL622
CL623
CL624
CL625
CL626
CL627
CL628
CL629
CL630
CL631
CL632
CL633
CL634
CL635
CL636
CL637
CL638
CL639
CL640
CL641
CL642
CL643
CL644
CL645
CL646
CL647
CL648
CL649
CL650
CL651
CL652
CL653
CL654
CL655
CL656
CL657
CL658
CL659
CL660
CL661
CL662
CL663
CL664
CL665
CL666
CL667
CL668
CL669
CL670
CL671
CL672
CL673
CL674
CL675
CL676
CL677
CL678
CL679
CL680
CL681
CL682
CL683
CL684
CL685
CL686
CL687
CL688
CL689
CL690
CL691
CL692
CL693
CL694
CL695
CL696
CL697
CL698
CL699
CL700
CL701
CL702
CL703
CL704
CL705
CL706
CL707
CL708
CL709
CL710
CL711
CL712
CL713
CL714
CL715
CL716
CL717
CL718
CL719
CL720
CL721
CL722
CL723
CL724
CL725
CL726
CL727
CL728
CL729
CL730
CL731
CL732
CL733
CL734
CL735
CL736
CL737
CL738
CL739
CL740
CL741
CL742
CL743
CL744
CL745
CL746
CL747
CL748
CL749
CL750
CL751
CL752
CL753
CL754
CL755
CL756
CL757
CL758
CL759
CL760
CL761
CL762
CL763
CL764
CL765
CL766
CL767
CL768
CL769
CL770
CL771
CL772
CL773
CL774
CL775
CL776
CL777
CL778
CL779
CL780
CL781
CL782
CL783
CL784
CL785
CL786
CL787
CL788
CL789
CL790
CL791
CL792
CL793
CL794
CL795
CL796
CL797
CL798
CL799
CL800
CL801
CL802
CL803
CL804
CL805
CL806
CL807
CL808
CL809
CL810
CL811
CL812
CL813
CL814
CL815
CL816
CL817
CL818
CL819
CL820
CL821
CL822
CL823
CL824
CL825
CL826
CL827
CL828
CL829
CL830
CL831
CL832
CL833
CL834
CL835
CL836
CL837
CL838
CL839
CL840
CL841
CL842
CL843
CL844
CL845
CL846
CL847
CL848
CL849
CL850
CL851
CL852
CL853
CL854
CL855
CL856
CL857
CL858
CL859
CL860
CL861
CL862
CL863
CL864
CL865
CL866
CL867
CL868
CL869
CL870
CL871
CL872
CL873
CL874
CL875
CL876
CL877
CL878
CL879
CL880
CL881
CL882
CL883
CL884
CL885
CL886
CL887
CL888
CL889
CL890
CL891
CL892
CL893
CL894
CL895
CL896
CL897
CL898
CL899
CL900
CL901
CL902
CL903
CL904
CL905
CL906
CL907
CL908
CL909
CL910
CL911
CL912
CL913
CL914
CL915
CL916
CL917
CL918
CL919
CL920
CL921
CL922
CL923
CL924
CL925
CL926
CL927
CL928
CL929
CL930
CL931
CL932
CL933
CL934
CL935
CL936
CL937
CL938
CL939
CL940
CL941
CL942
CL943
CL944
CL945
CL946
CL947
CL948
CL949
CL950
CL951
CL952
CL953
CL954
CL955
CL956
CL957
CL958
CL959
CL960
CL961
CL962
CL963
CL964
CL965
CL966
CL967
CL968
CL969
CL970
CL971
CL972
CL973
CL974
CL975
CL976
CL977
CL978
CL979
CL980
CL981
CL982
CL983
CL984
CL985
CL986
CL987
CL988
CL989
CL990
CL991
CL992
CL993
CL994
CL995
CL996
CL997
CL998
CL999
CL1000

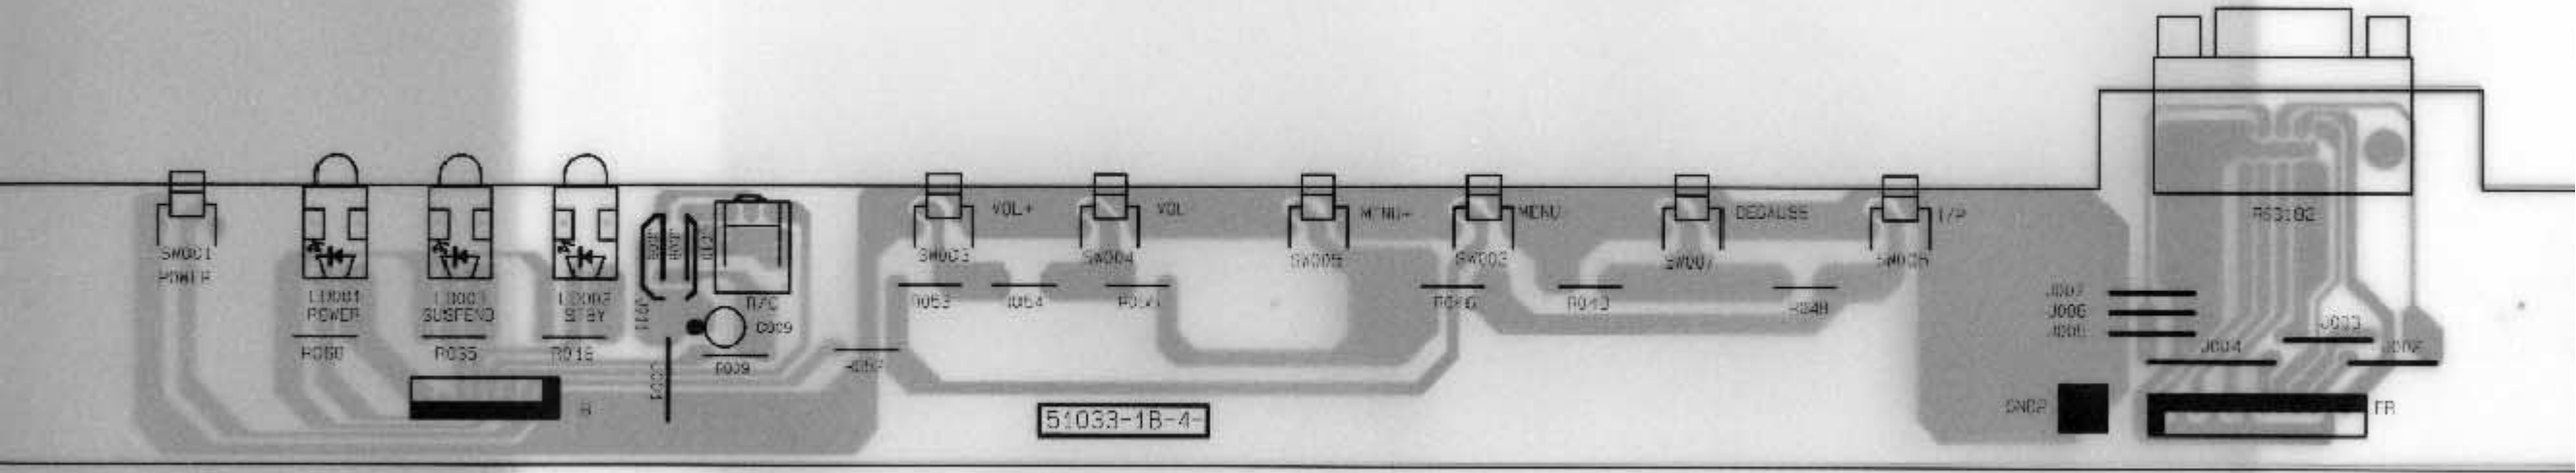
SW001
POWER
LED001
POWER
R050
LED003
SUSPEND
R035
R
LED002
STBY
R016
R024
R023
R022
R021
R020
D/C
C009
R039
R057
SW003
VOL+
D053
D054
SW004
VOL-
R047
SW005
MENU+
SW006
MENU
R046
R043
SW007
DEGAUSS
R048
SW008
I/P
CN001
J007
J006
J005
J004
J003
J002
GND
FR
51033-1B-4-

06MB21020-1C-B-
51060-1C-B
WARNING
ONLY WITH SAME TYPE AND
GND3

WARNING
ONLY WITH SAME TYPE AND RATING OF FUSE
C733
C732

51022-1B-3-
CRT-SOCKET
GND3
VR901
R993
R951
R952
R950
R957
R962
R973
R974
R975
L972
L974
L975
L971
IC501
CV
HS
K+
SDA
SCL
5V
BLANK
CLAMP
J901
J902
J903
J904
J905
J906
J907
J908
J909
J910
J911
J912
J915
J916
J917
J918
J919
D901
D902
D903
D904
D905
D906
D907
D908
D909
D910
D911
D912
D913
D914
D915
D916
D917
D918
D919
C901
C902
C903
C904
C905
C906
C907
C908
C909
C910
C911
C912
C913
C914
C915
C916
C917
C918
C919
C920
C921
C922
C923
C924
C925
C926
C927
C928
C929
C930
C931
C932
C933
C934
C935
C936
C937
C938
C939
C940

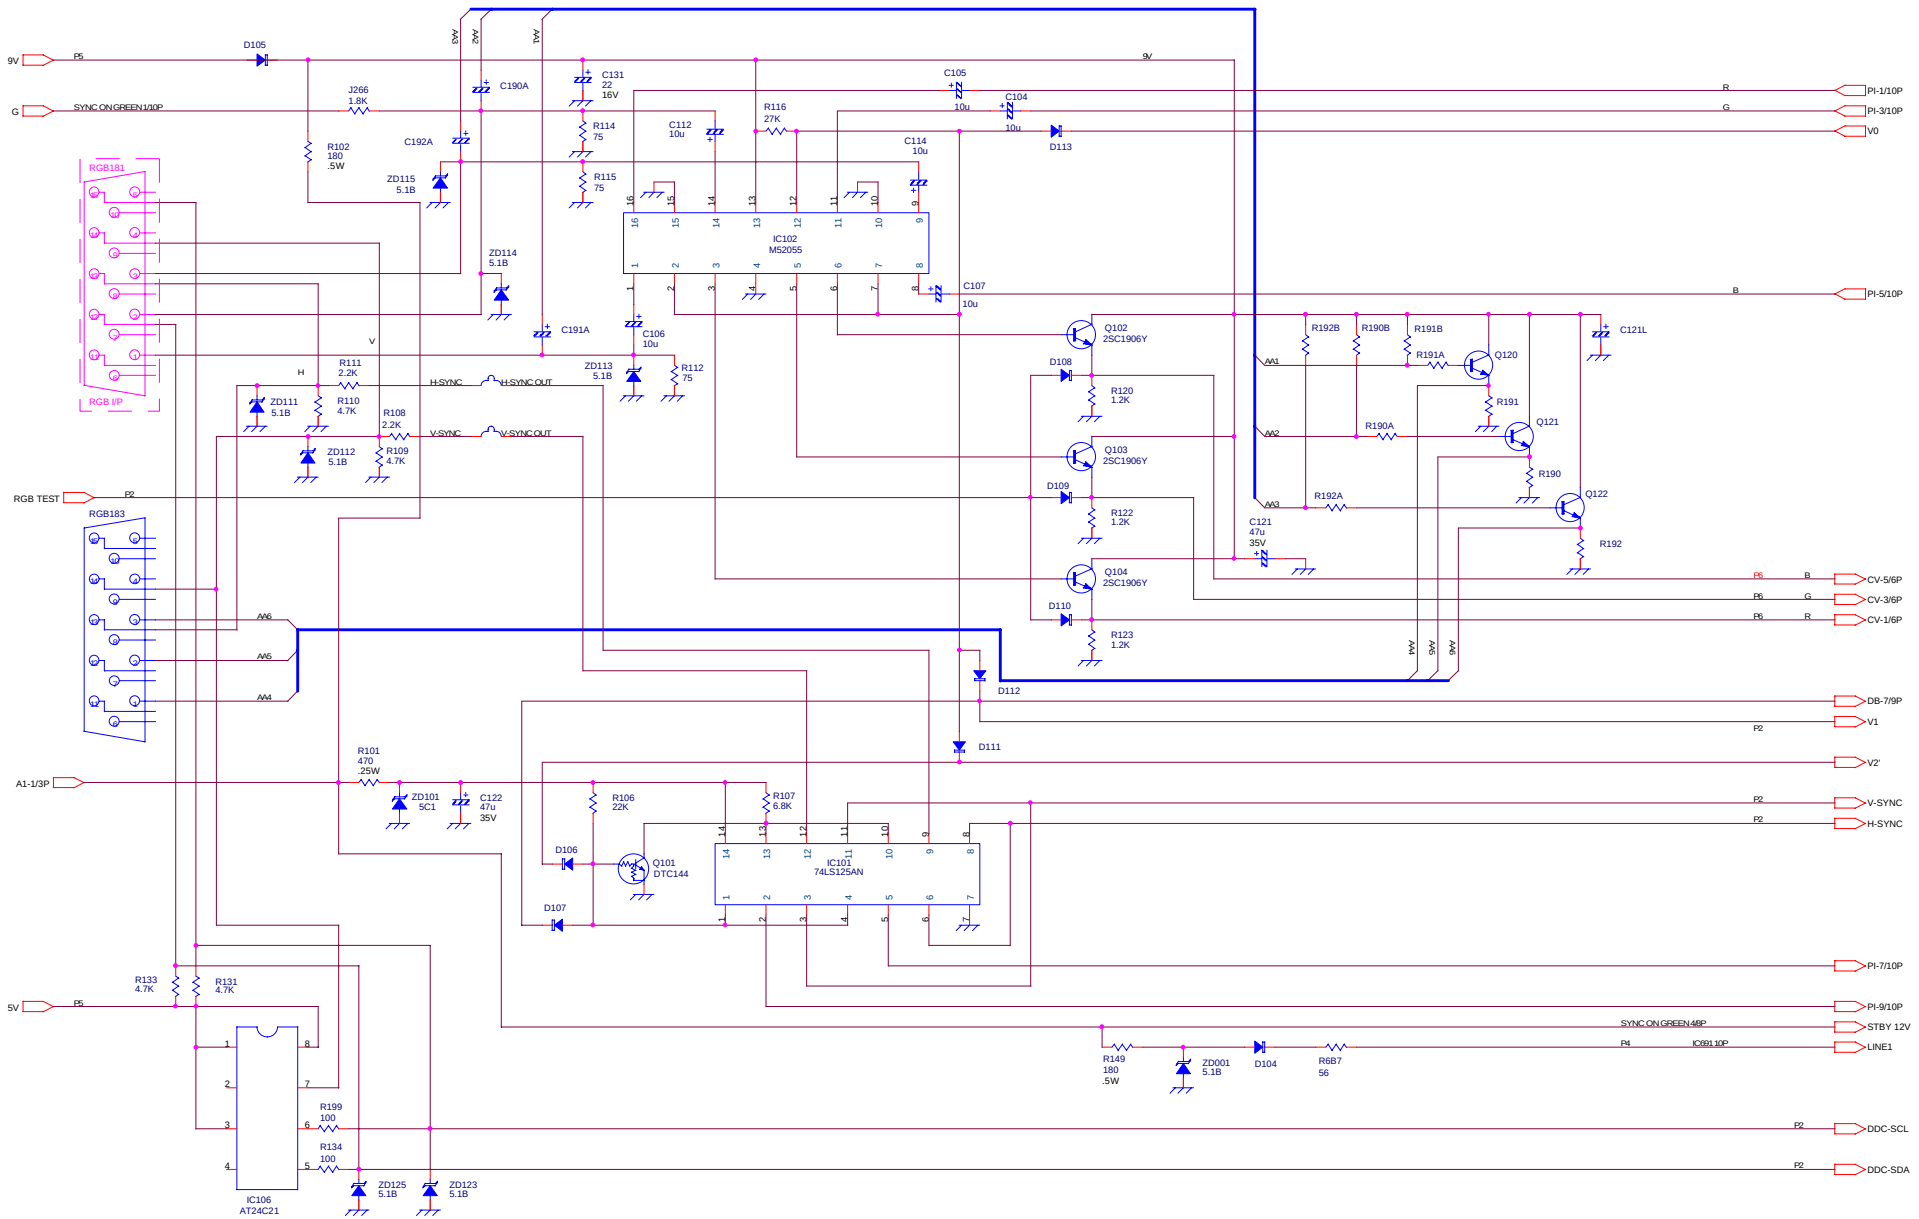

represent the critical component.

PLAG 1

SAMPO CO. ELECTRONIC RD2 (RGB.SCH)		
SME-32DL5(P)		
Size C	Document Number MONITOR RGB	Rev 0
Date: Monday, November 19, 2001	Sheet 1 of 14	

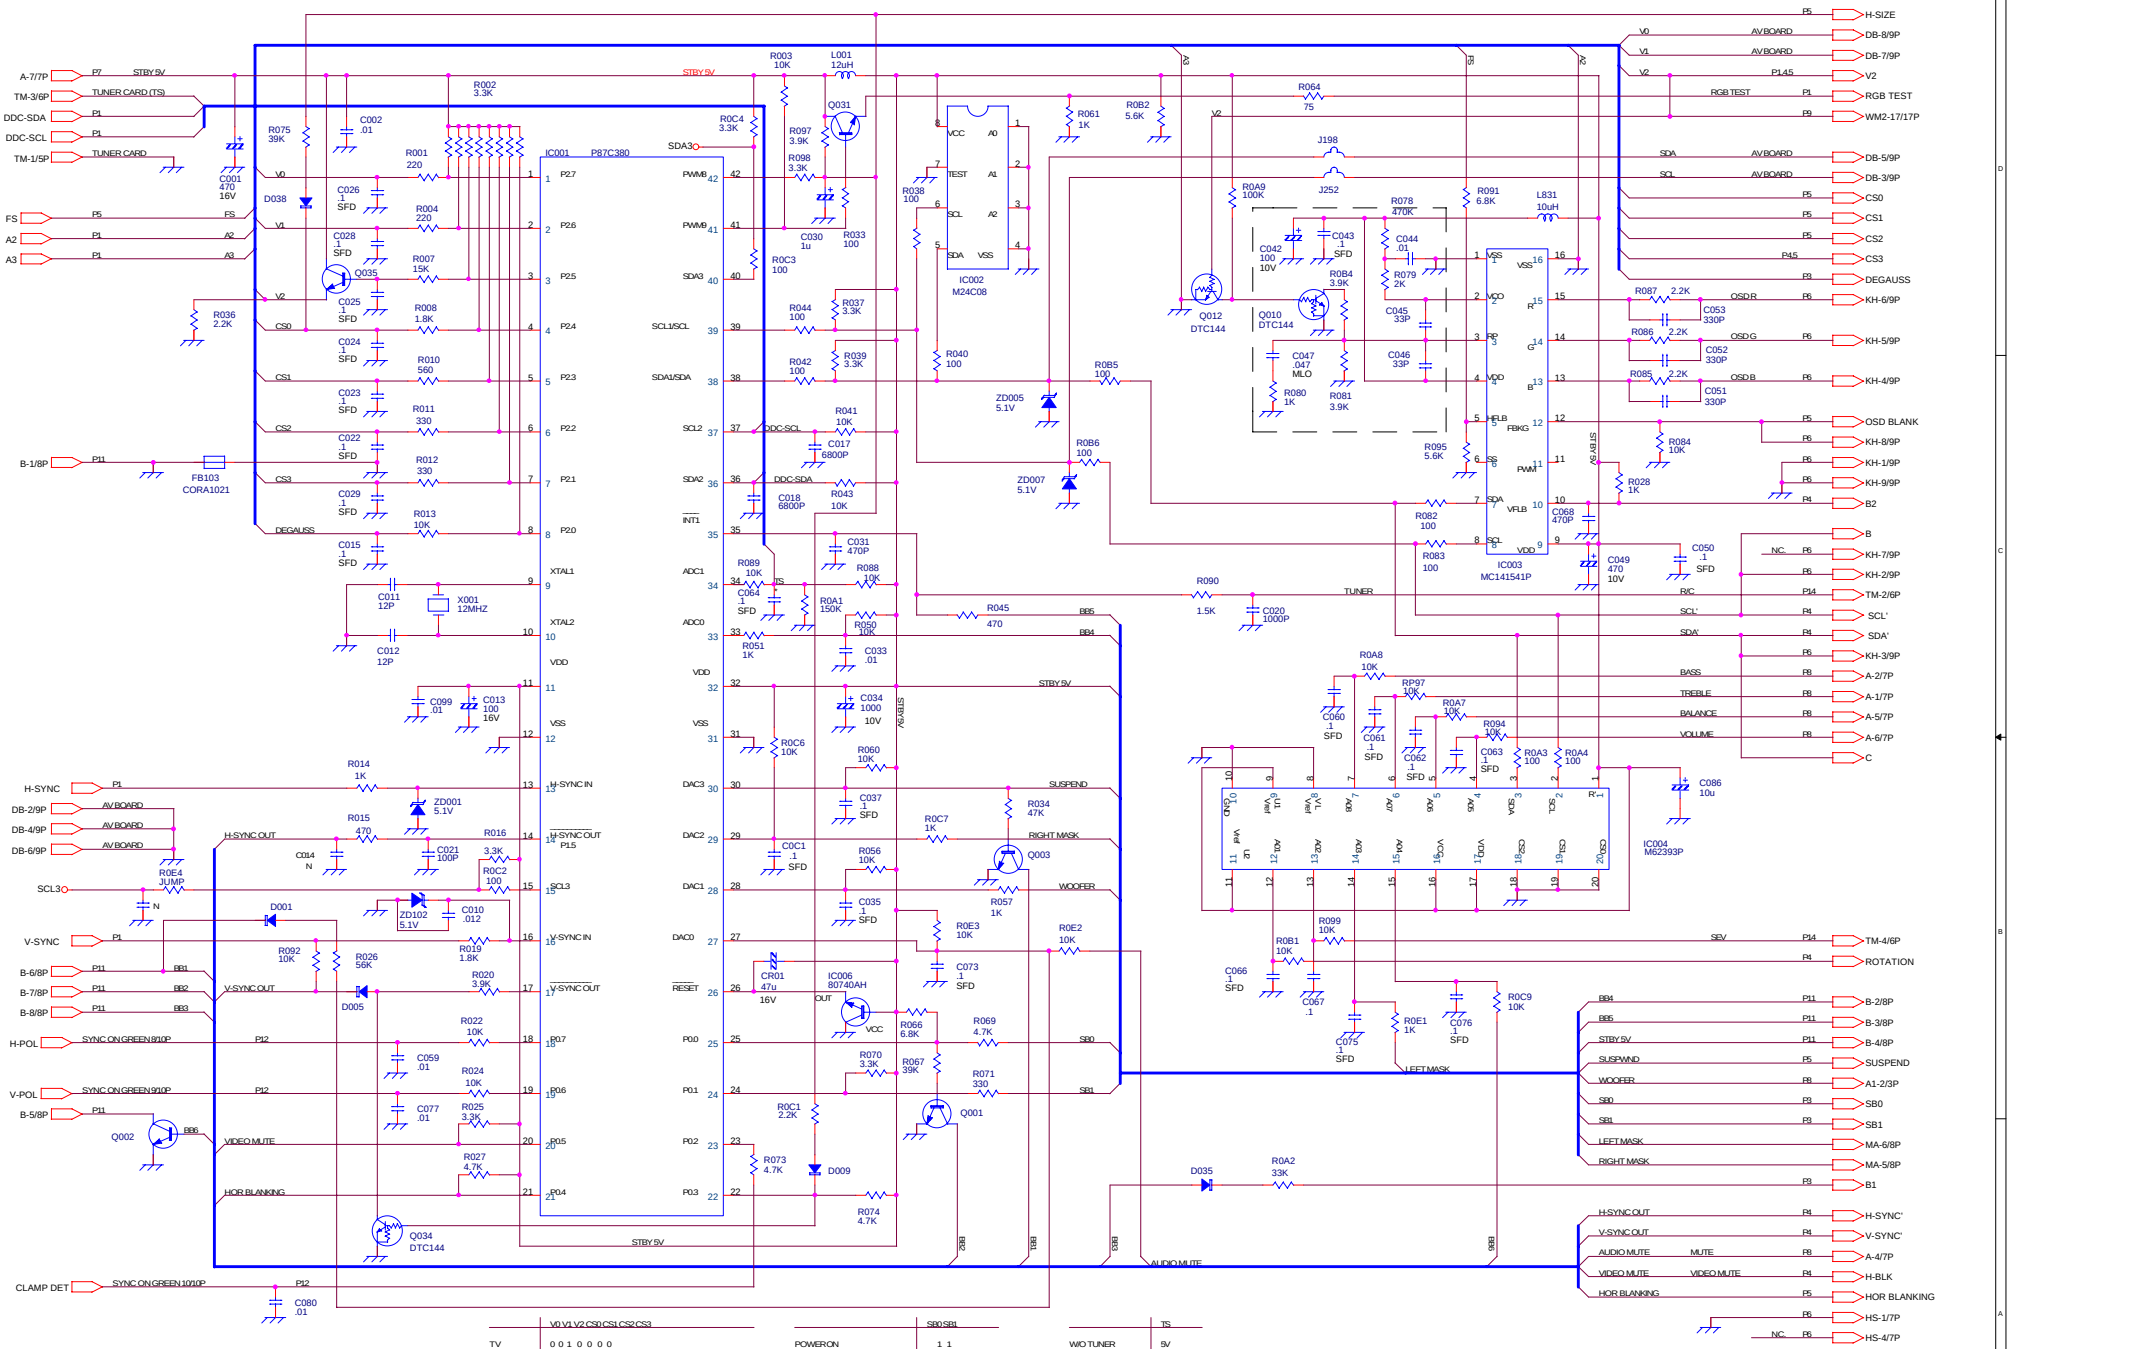

V0 V1 V2 CS0 CS1 CS2 CS3	
TV	0 0 1 0 0 0 0
AV1	1 0 1 0 0 0 0
AV2	0 1 1 0 0 0 0
YCbCr	1 1 1 0 0 0 0
YPbPr	1 0 0
RGB	1 1 0

SB0 SB1	
POWER ON	1 1
POWER SAVING	0 1
OFF	0 0

TS	
W/O TUNER	5V
NTSC	2.5V
PAL	0V
SECAM	0V

31K	0 0 0 0
35K	1 0 0 0
39K	1 1 0 0
43K	1 1 1 1
49K	1 1 1 1

PAGE 2

SAMPO CO. ELECTRONIC RD2 (CPU.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	CPU	0

Date: Monday, November 19, 2001 Sheet 2 of 14

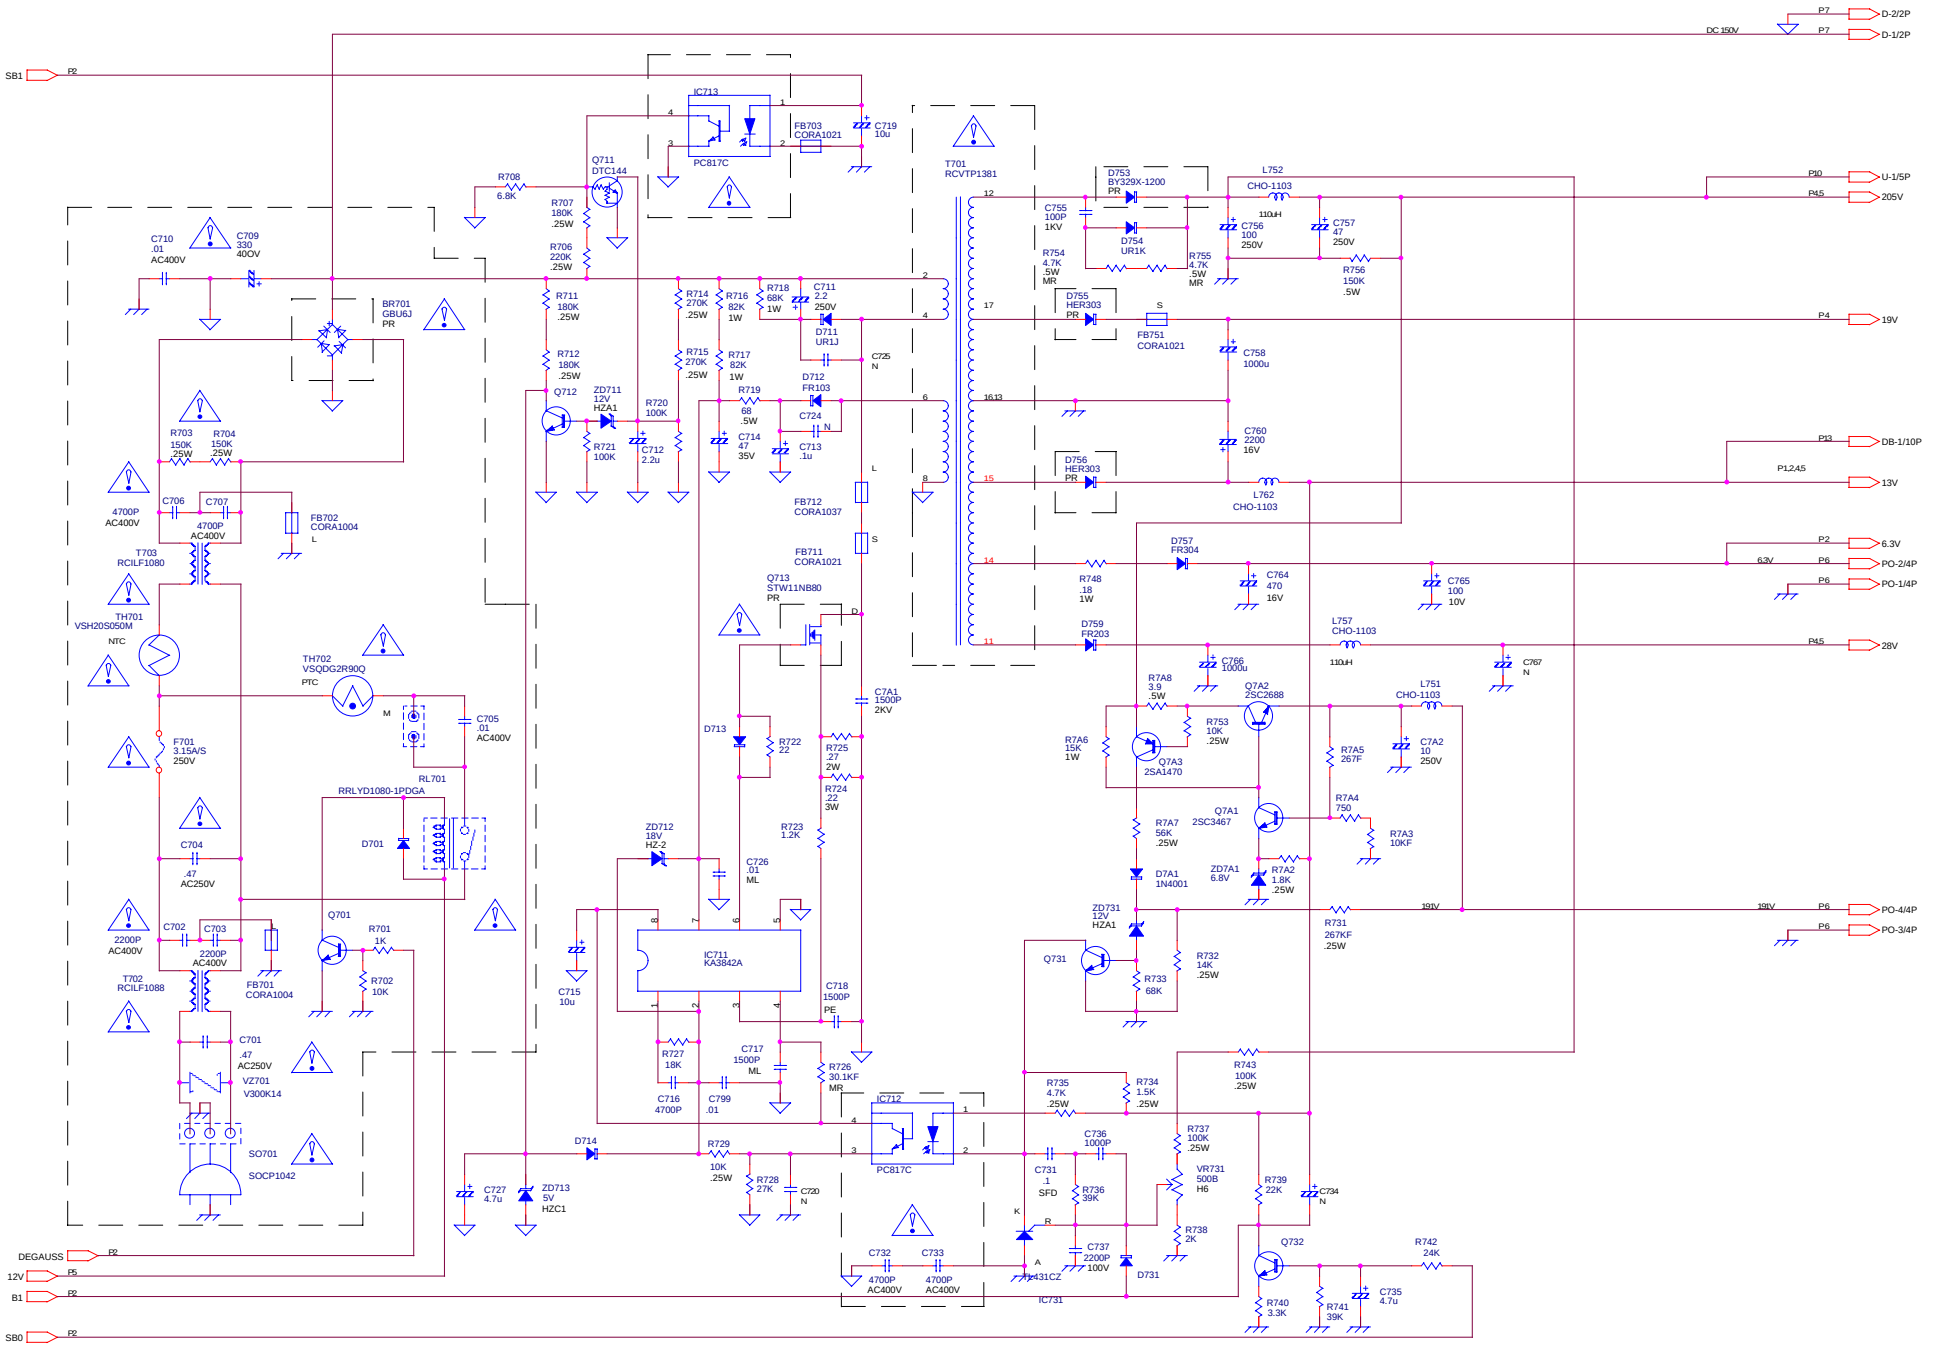

PAGE 3

SAMPO CO. ELECTRONIC RD2 (POWER1.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	MAIN POWER	

Date: Monday, November 19, 2001 Sheet 3 of 14

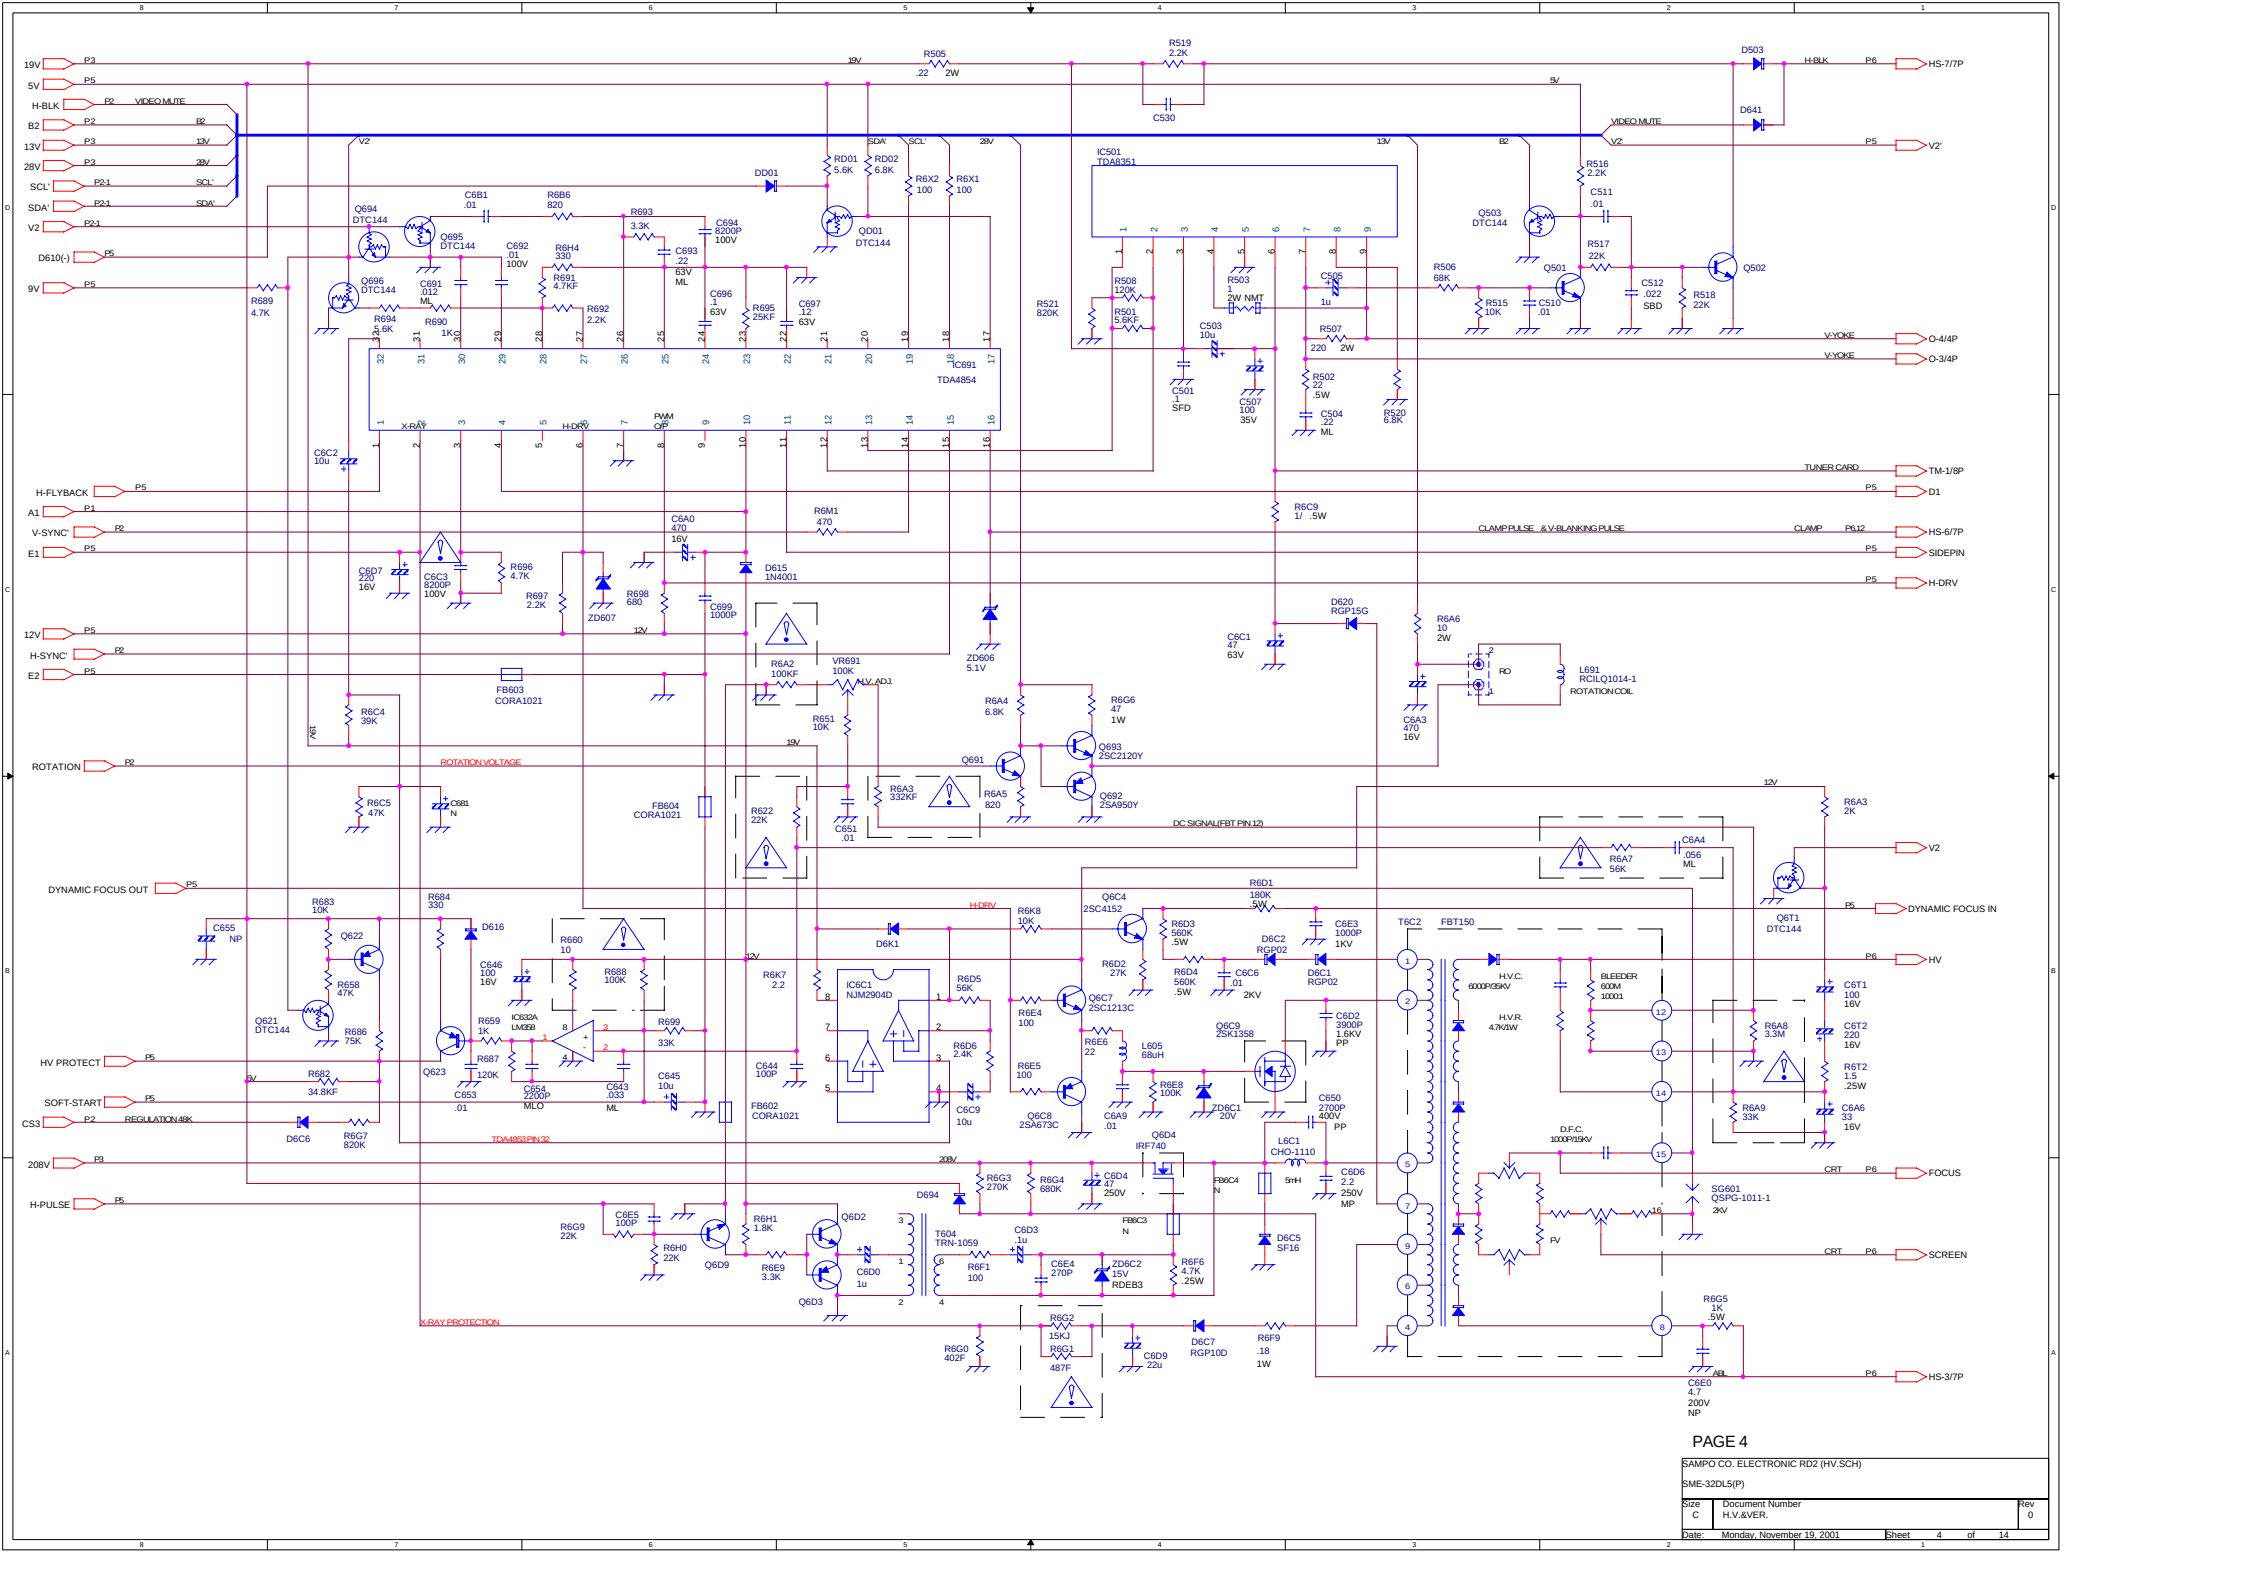
19V
5V
H-BLK
B2
13V
28V
SCL'
SDA'
V2
D610(-)
9V
VIDEO MUTE
IC501
TDA8351
IC691
TDA4854
H-FLYBACK
A1
V-SYNC'
E1
12V
H-SYNC'
E2
ROTATION
ROTATION VOLTAGE
DYNAMIC FOCUS OUT
HV PROTECT
SOFT-START
CS3
REGULATION 49K
208V
H-PULSE
X-RAY PROTECTION
TDA4863 PIN 32
CLAMP PULSE & V-BLANKING PULSE
DC SIGNAL(FBT PIN 12)
TUNER CARD
V-YOKE
V-YOKE
ROTATION COIL
L691
RCILQ1014-1
FBT150
H.V.C.
6000P/35KV
H.V.R.
4.7K/1W
BLEEDER
600M
1000:1
D.F.C.
1000P/15KV
SG601
QSPG-1011-1
2KV
FOCUS
SCREEN
HS-7/7P
V2'
HS-6/7P
SIDEPIN
H-DRV
TM-1/8P
D1
DYNAMIC FOCUS IN
HV
HS-3/7P
O-4/4P
O-3/4P
PAGE 4
SAMPO CO. ELECTRONIC RD2 (HV.SCH)
SME-32DL5(P)
Size C
Document Number H.V.&VER.
Rev 0
Date: Monday, November 19, 2001
Sheet 4 of 14

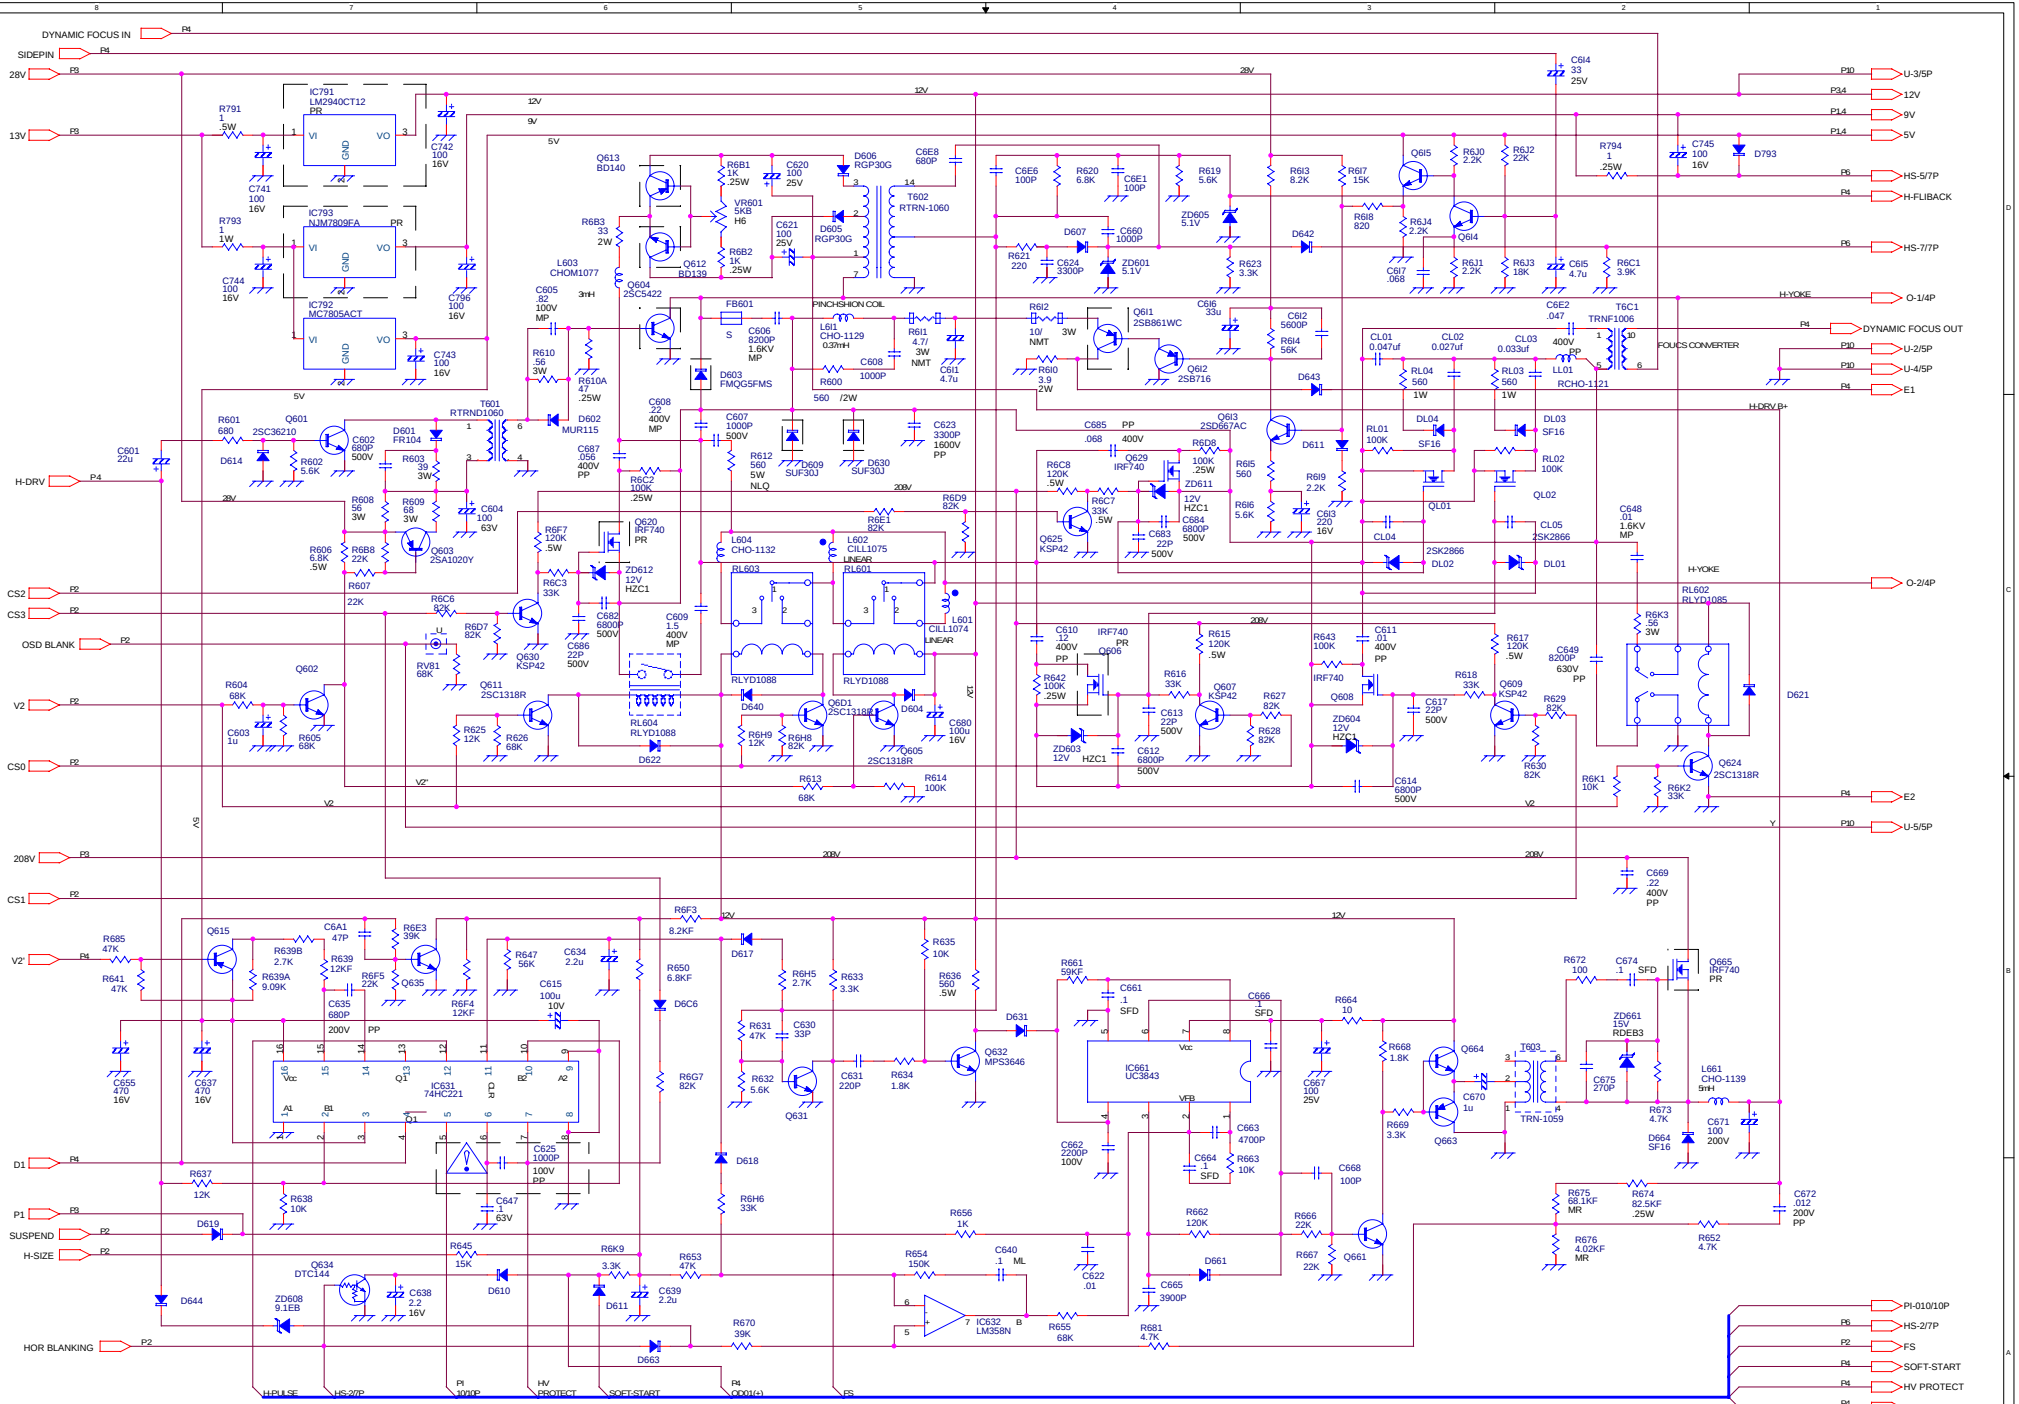

PAGE 5

SAMPO CO. ELECTRONIC RD2 (DEF.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	H. DEF. & SIDEPIN & RASTER CENTER	0

Date: Monday, November 19, 2001 Sheet 5 of 14

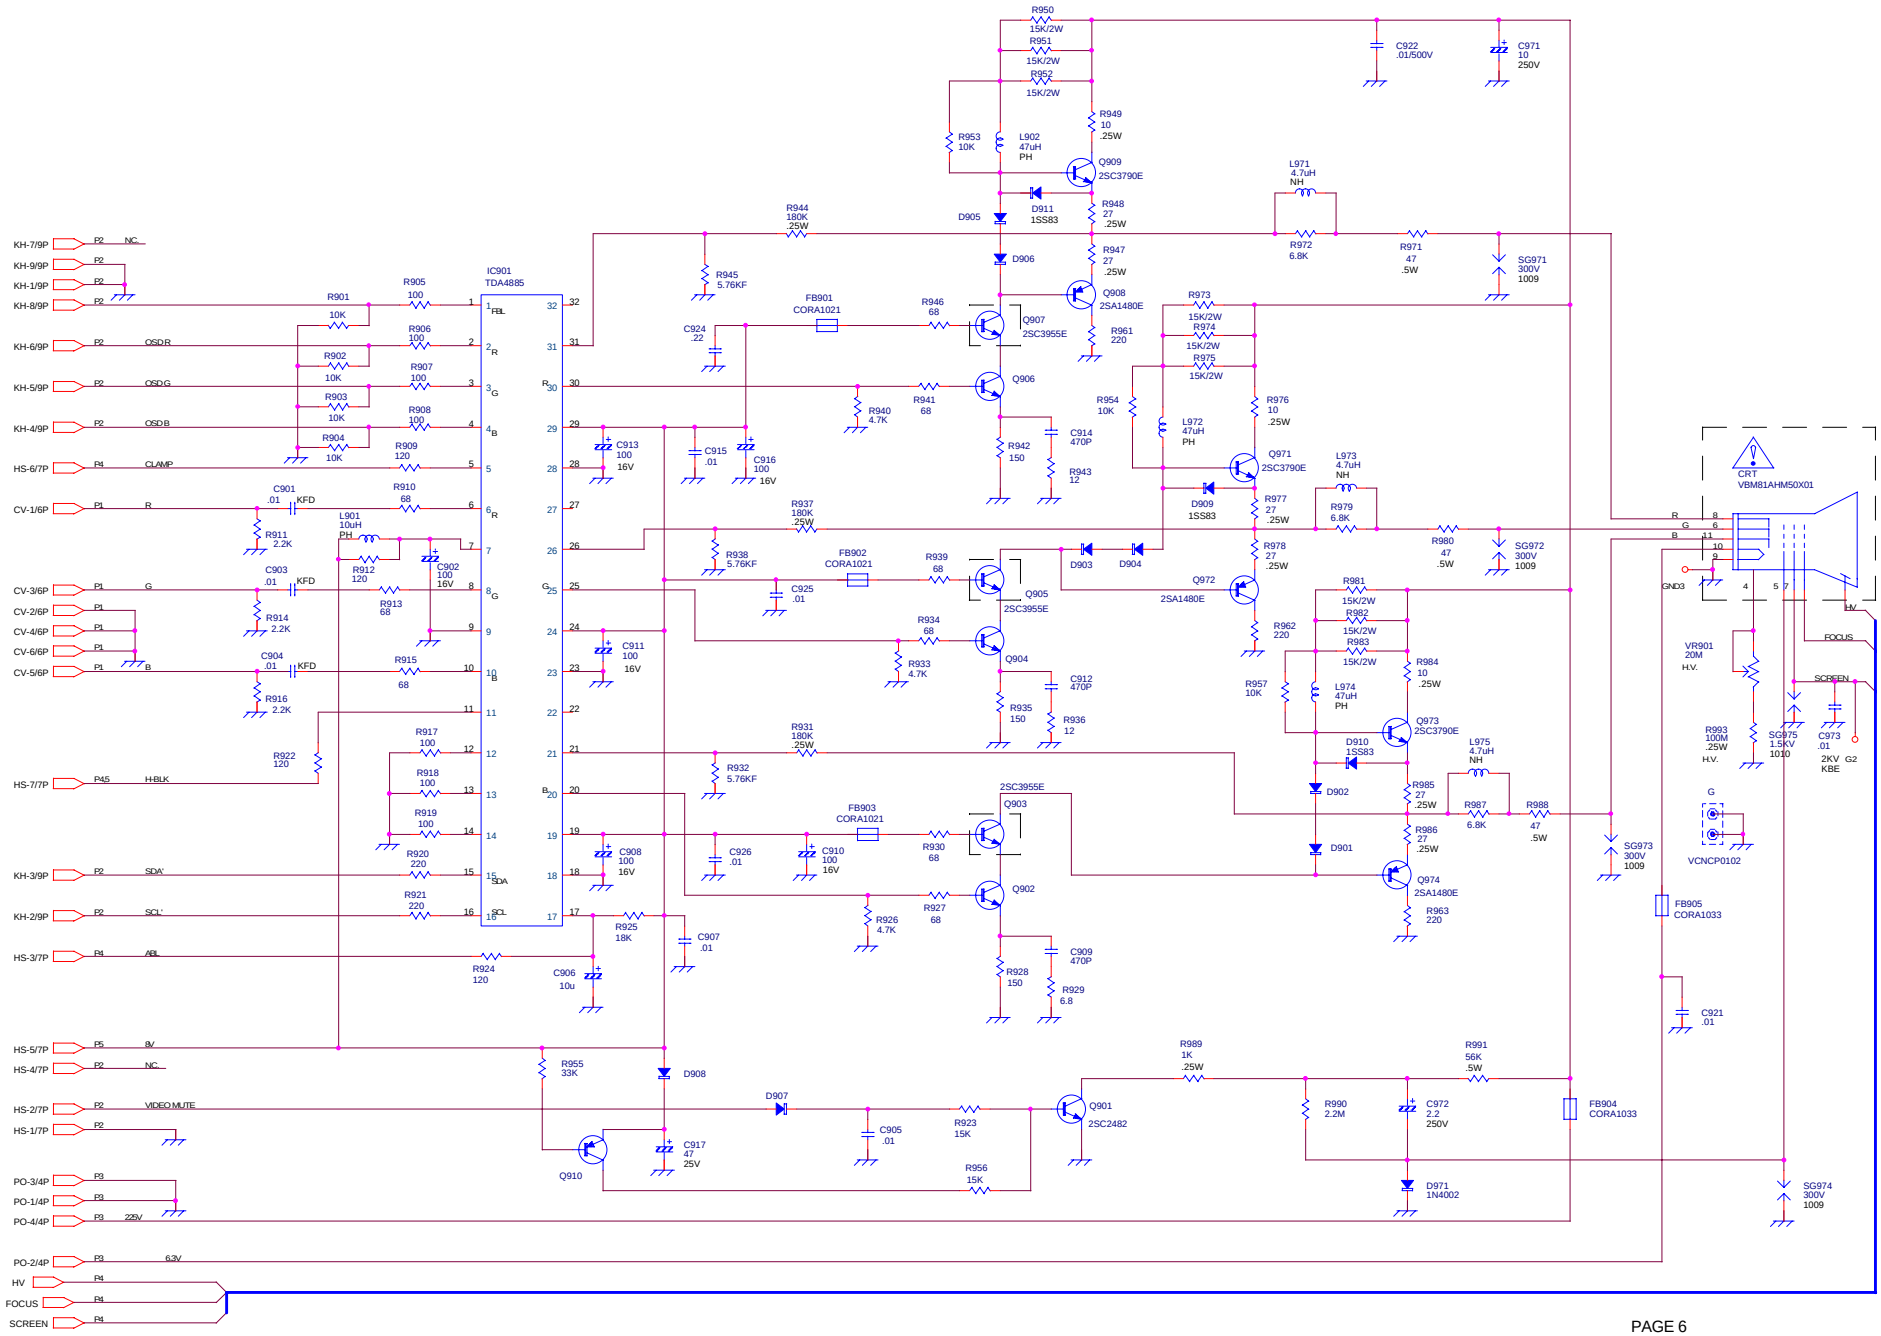

PAGE 6

SAMPO CO. ELECTRONIC R&D2 (CRT.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	CRT PWB	0

Date: Monday, November 19, 2001 Sheet 6 of 14

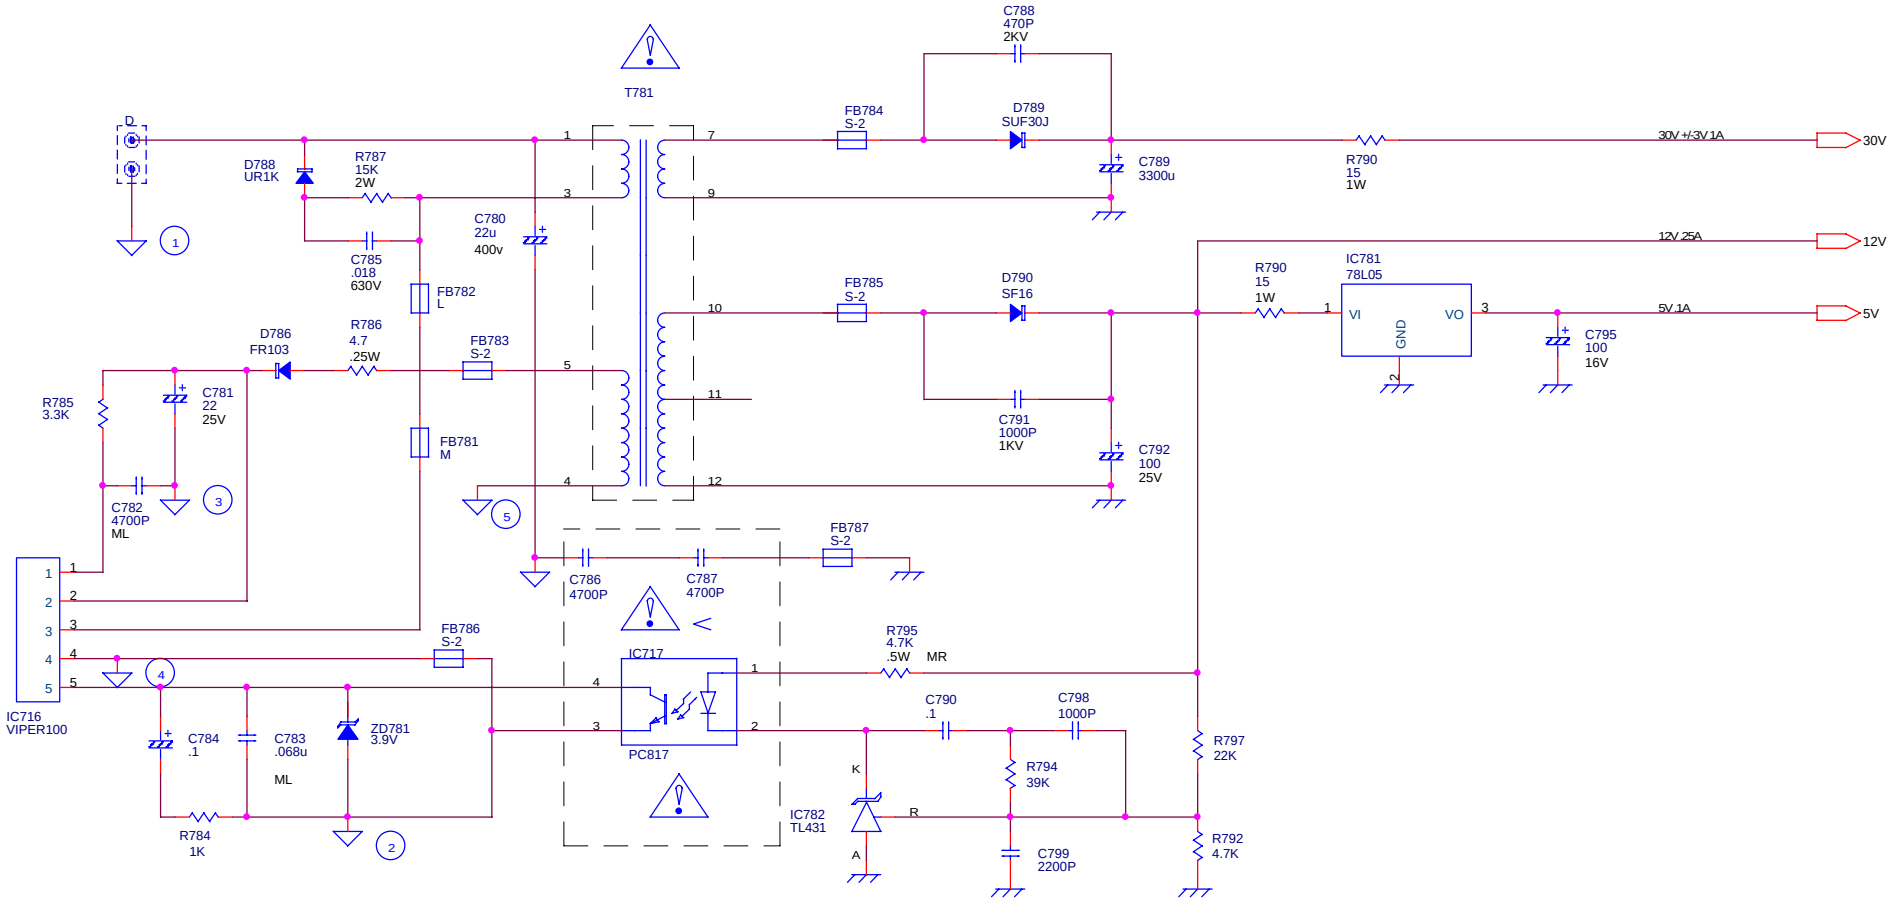

PAGE 7

SAMPO CO.ELECTRONIC RD2 (POWER.SCH)		
SME-32DL5(P)		
Size B	Document Number POWER	Rev 0
Date: Monday, November 19, 2001	Sheet 7 of 14	

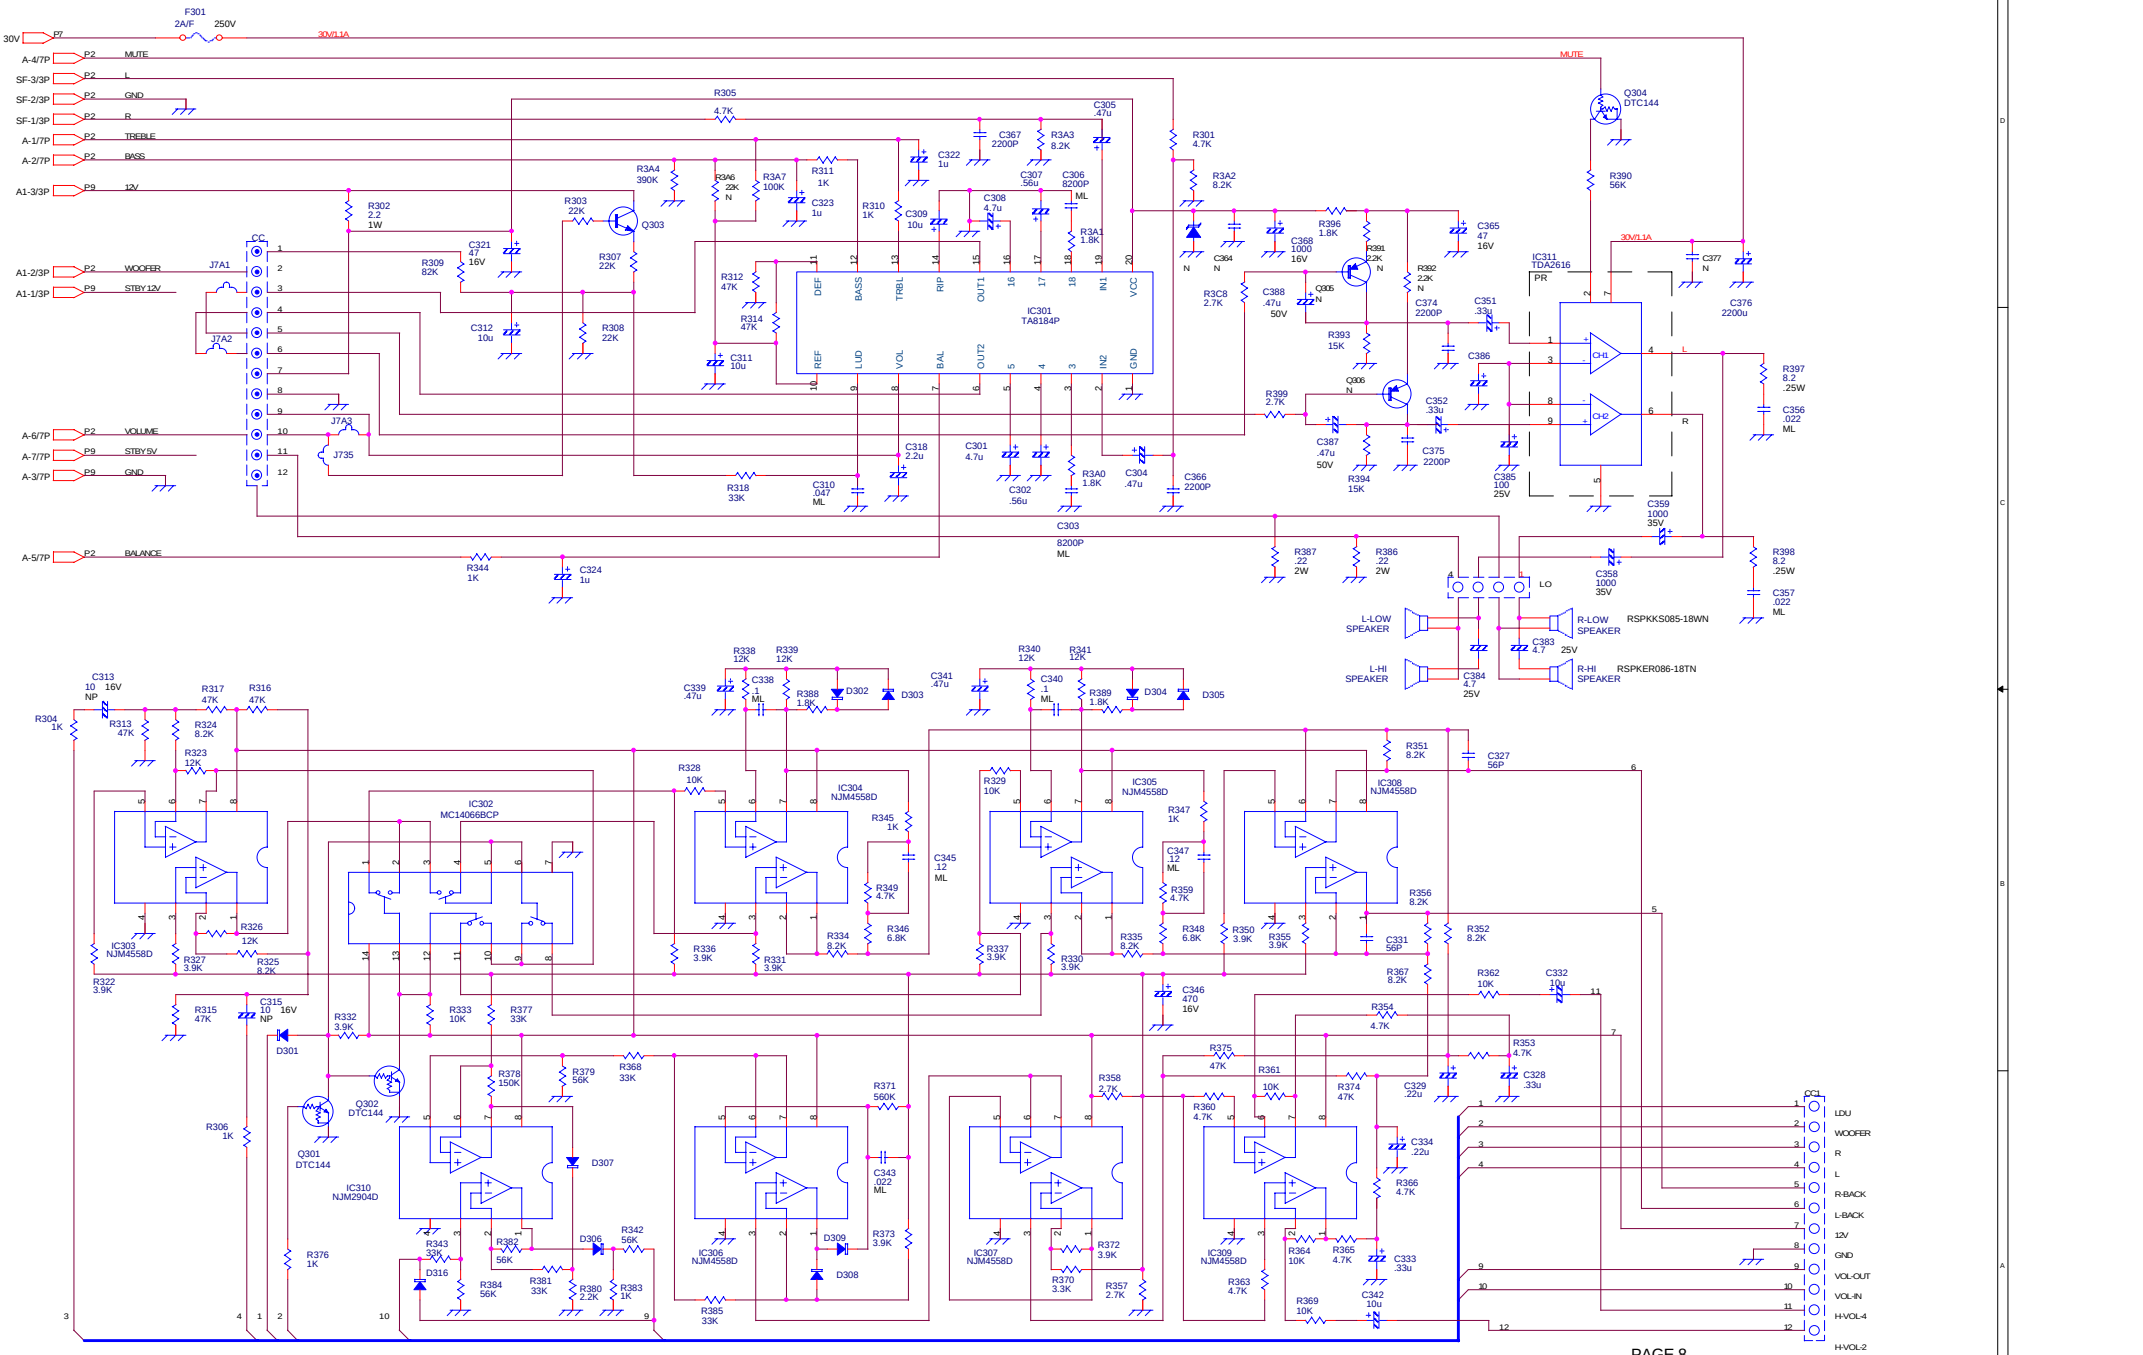

PAGE 8

SAMPO CO. ELECTRONIC RD2 (AUDIO.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	AUDIO	0

Date: Monday, November 19, 2001 Sheet 8 of 14

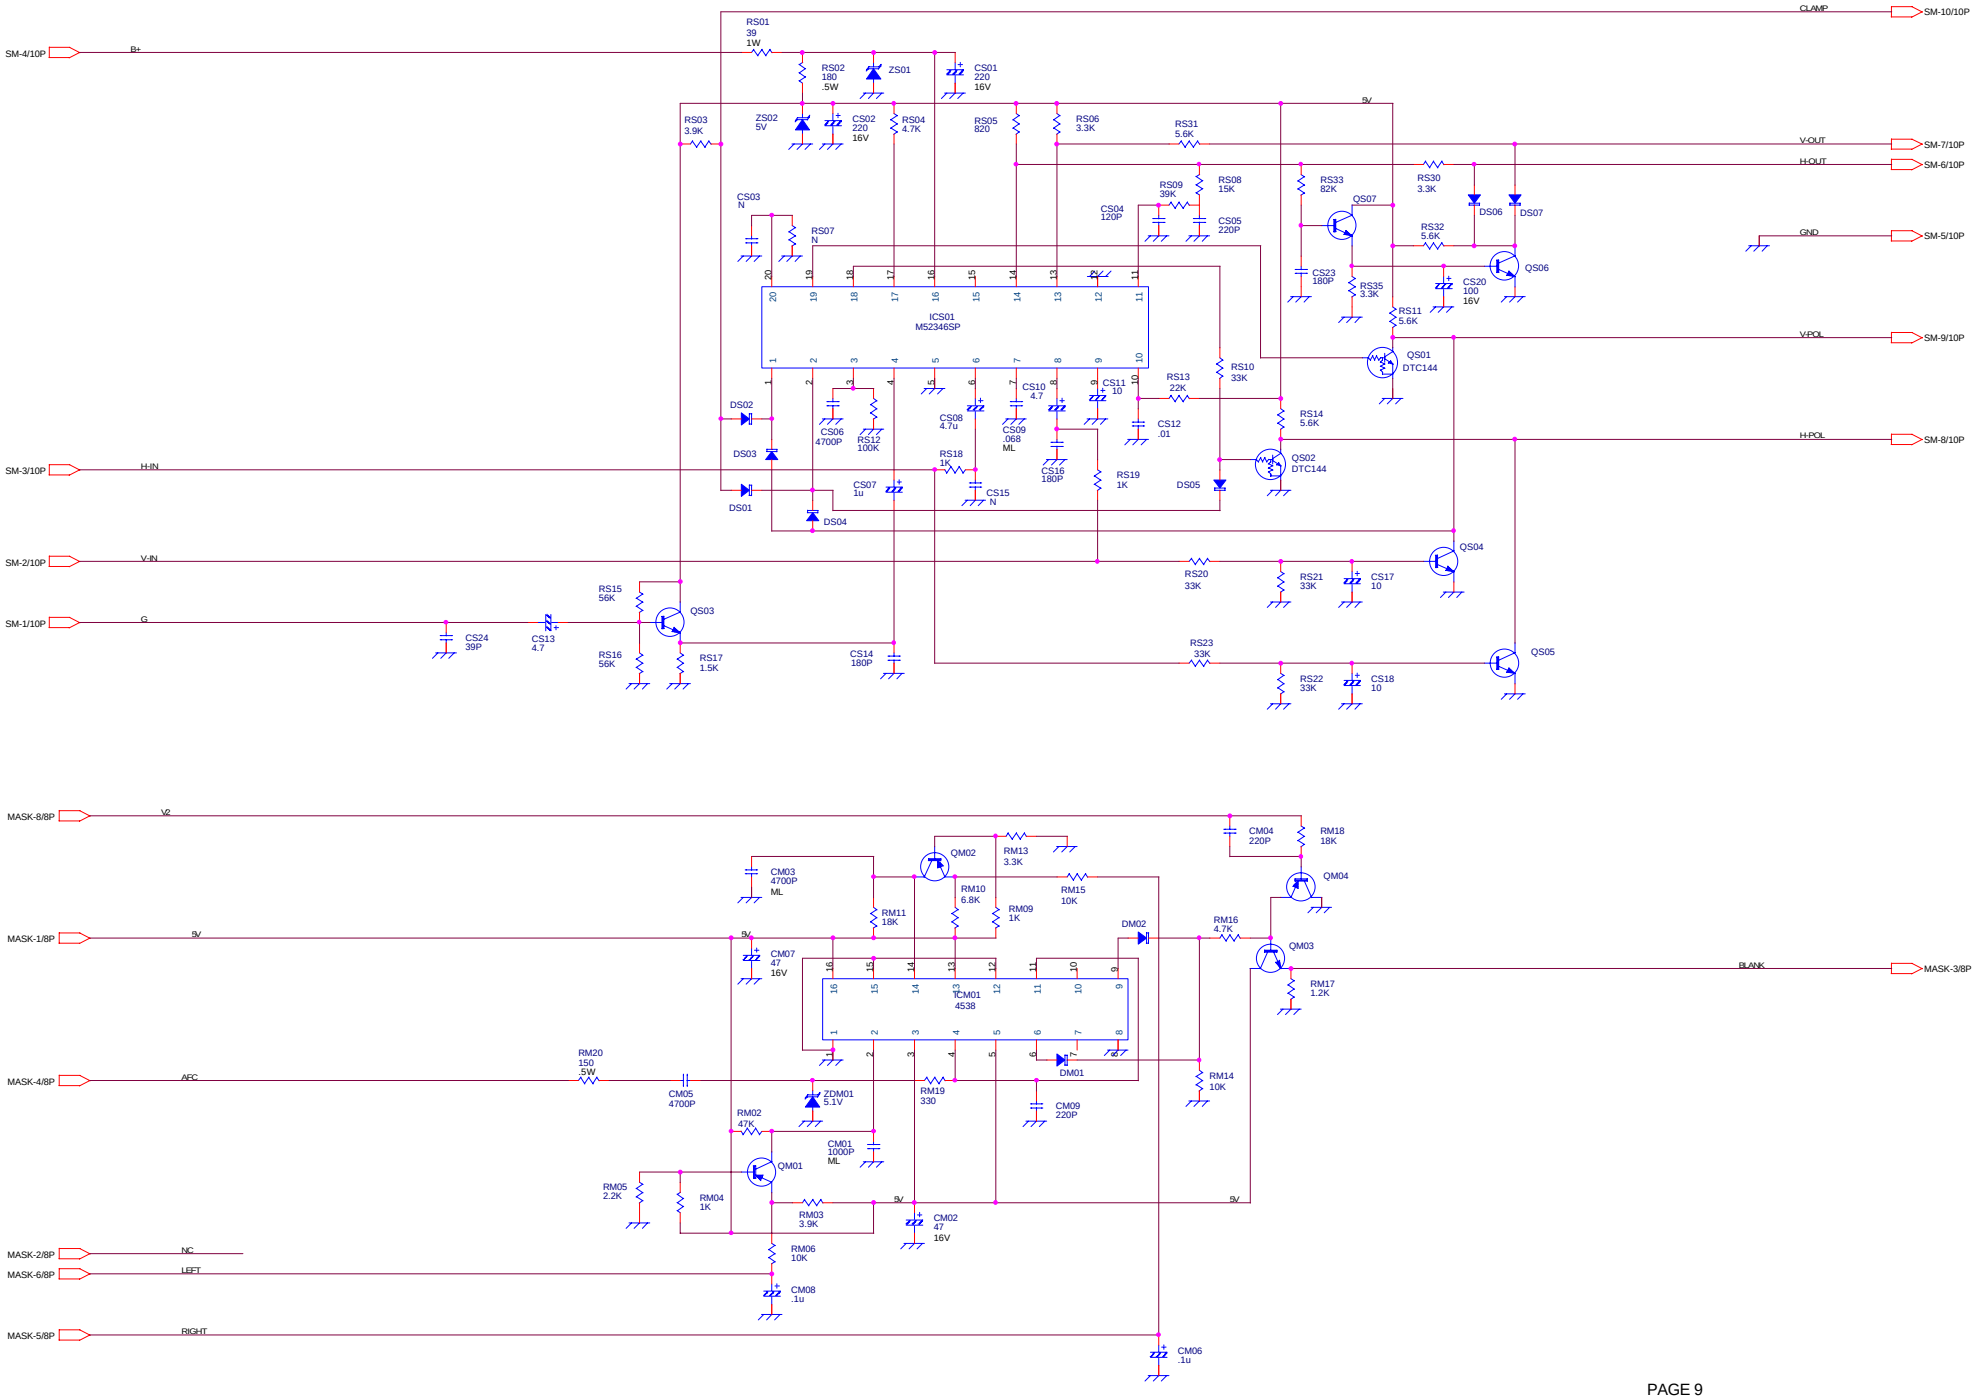

PAGE 9

SAMPO CO.ELECTRONIC RD2 (S-M.SCH)		
SME-32DL5(P)		
Size C	Document Number SYNC & MASK	Rev 0
Date: Monday, November 19, 2001	Sheet 9 of 14	

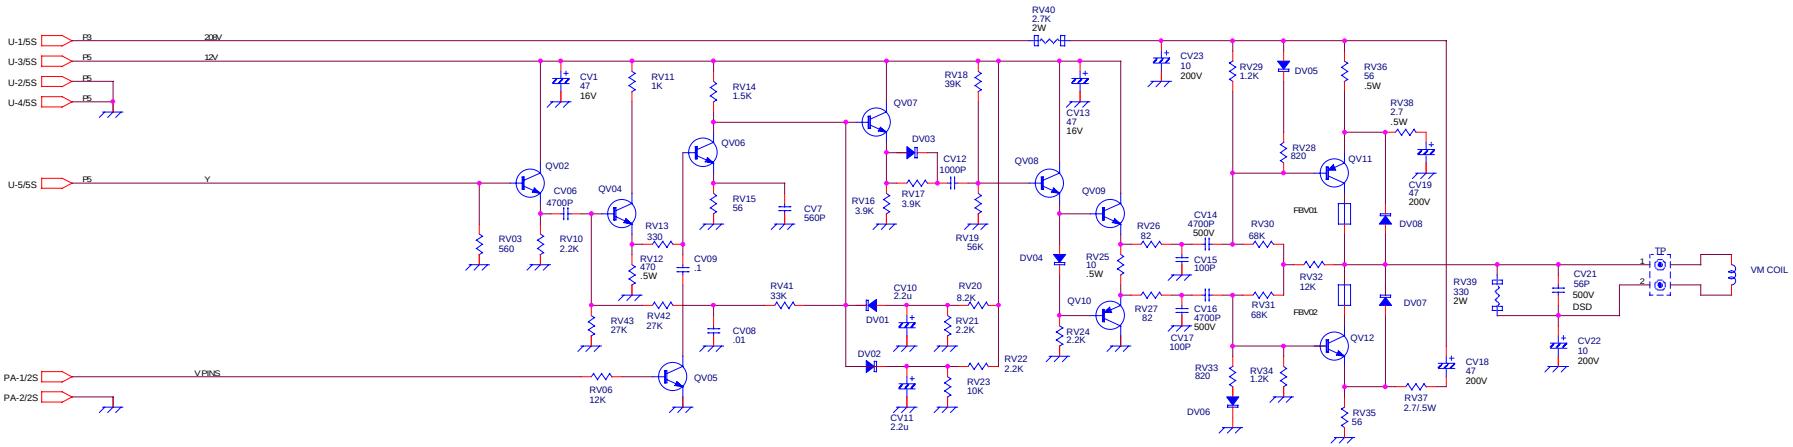

PLAG 10

SAMPO CO. ELECTRONIC RD2 (VM.SCH)

SME-32DL5(P)

Size	Document Number	Rev
C	VM	0

Date: Monday, November 19, 2001 Sheet 10 of 14

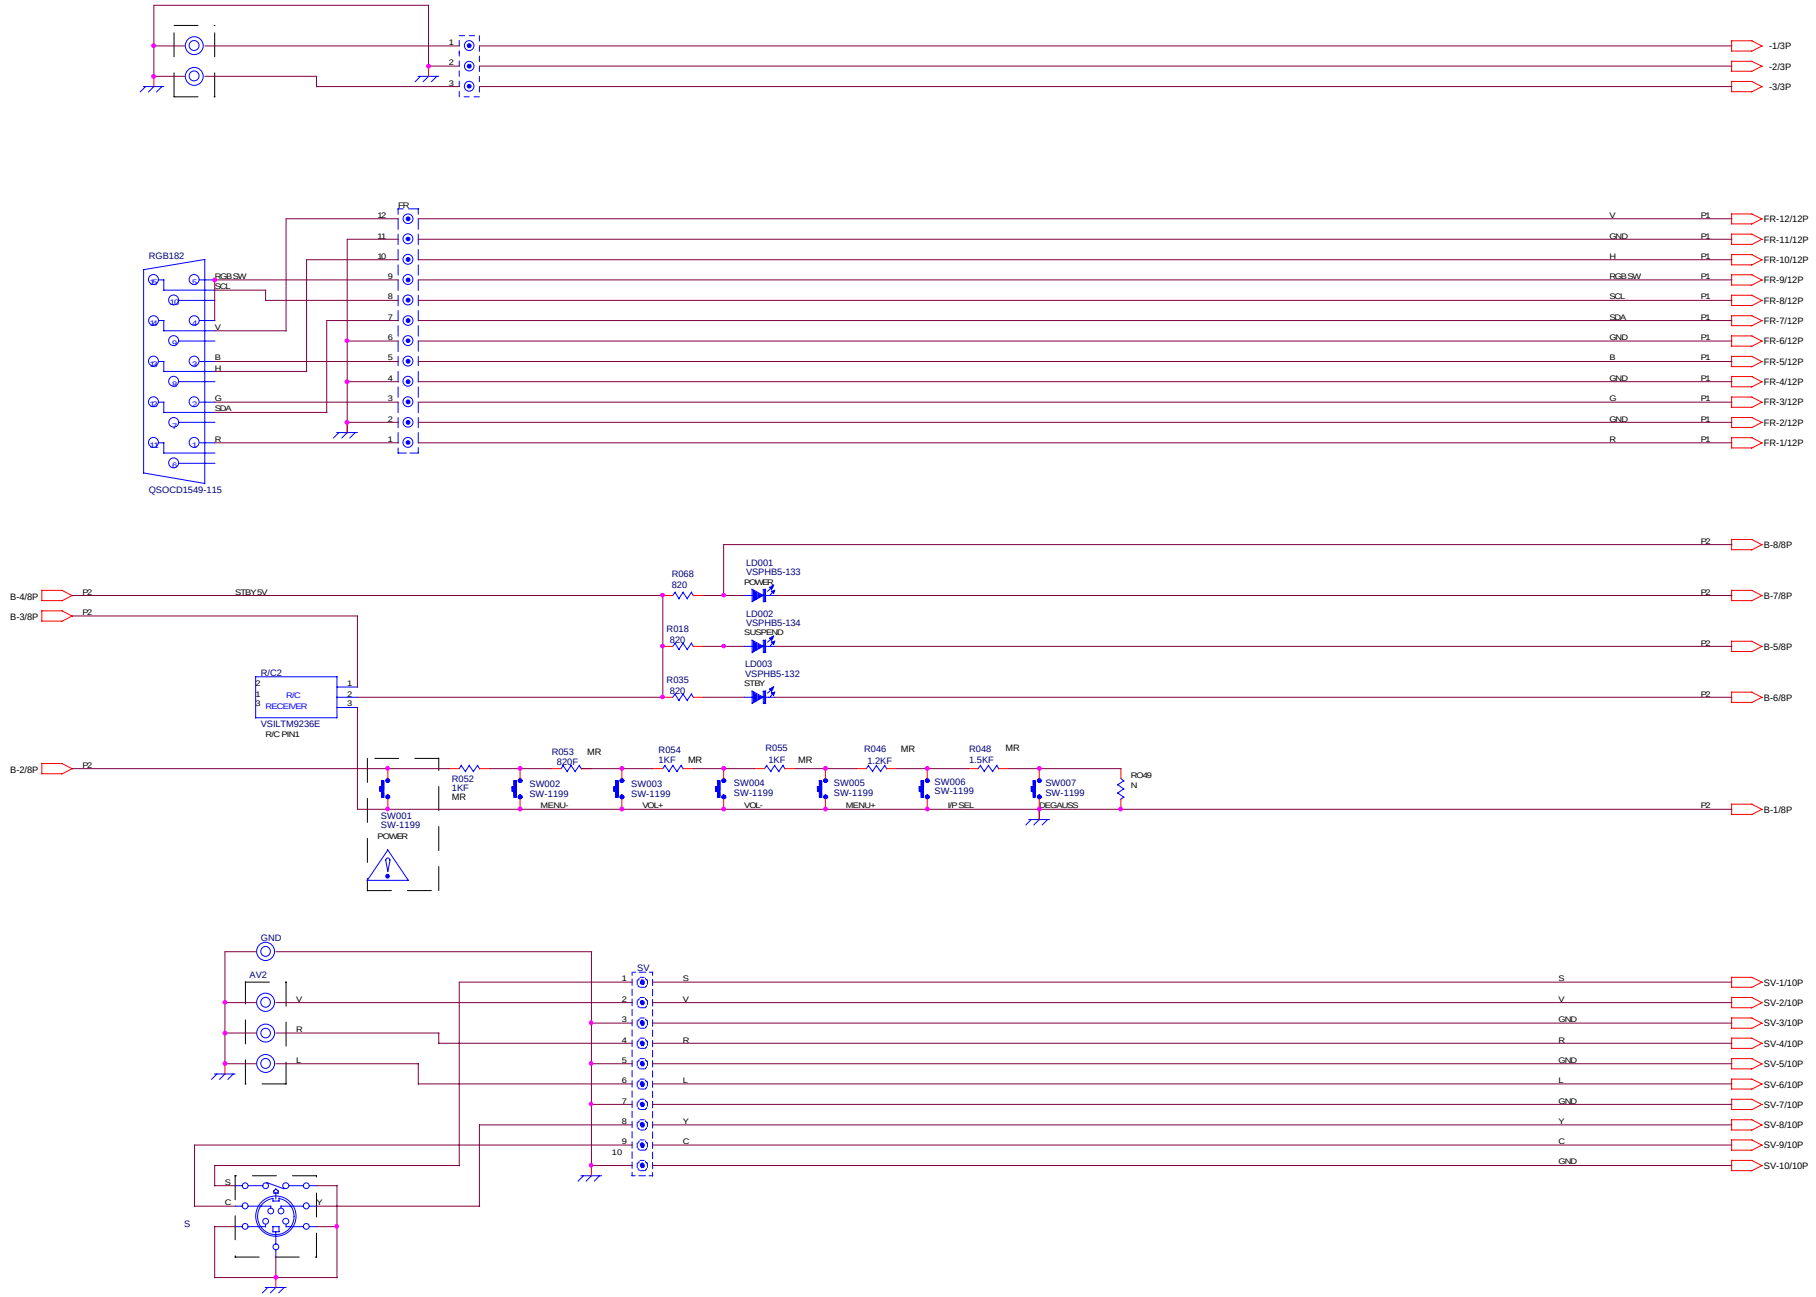

PAGE 11

SAMPO CO. ELECTRONIC RD2 (LED.SCH)		
SME-32DL5(P)		
Size C	Document Number LED	Rev 0
Date: Monday, November 19, 2001	Sheet 11 of 14	

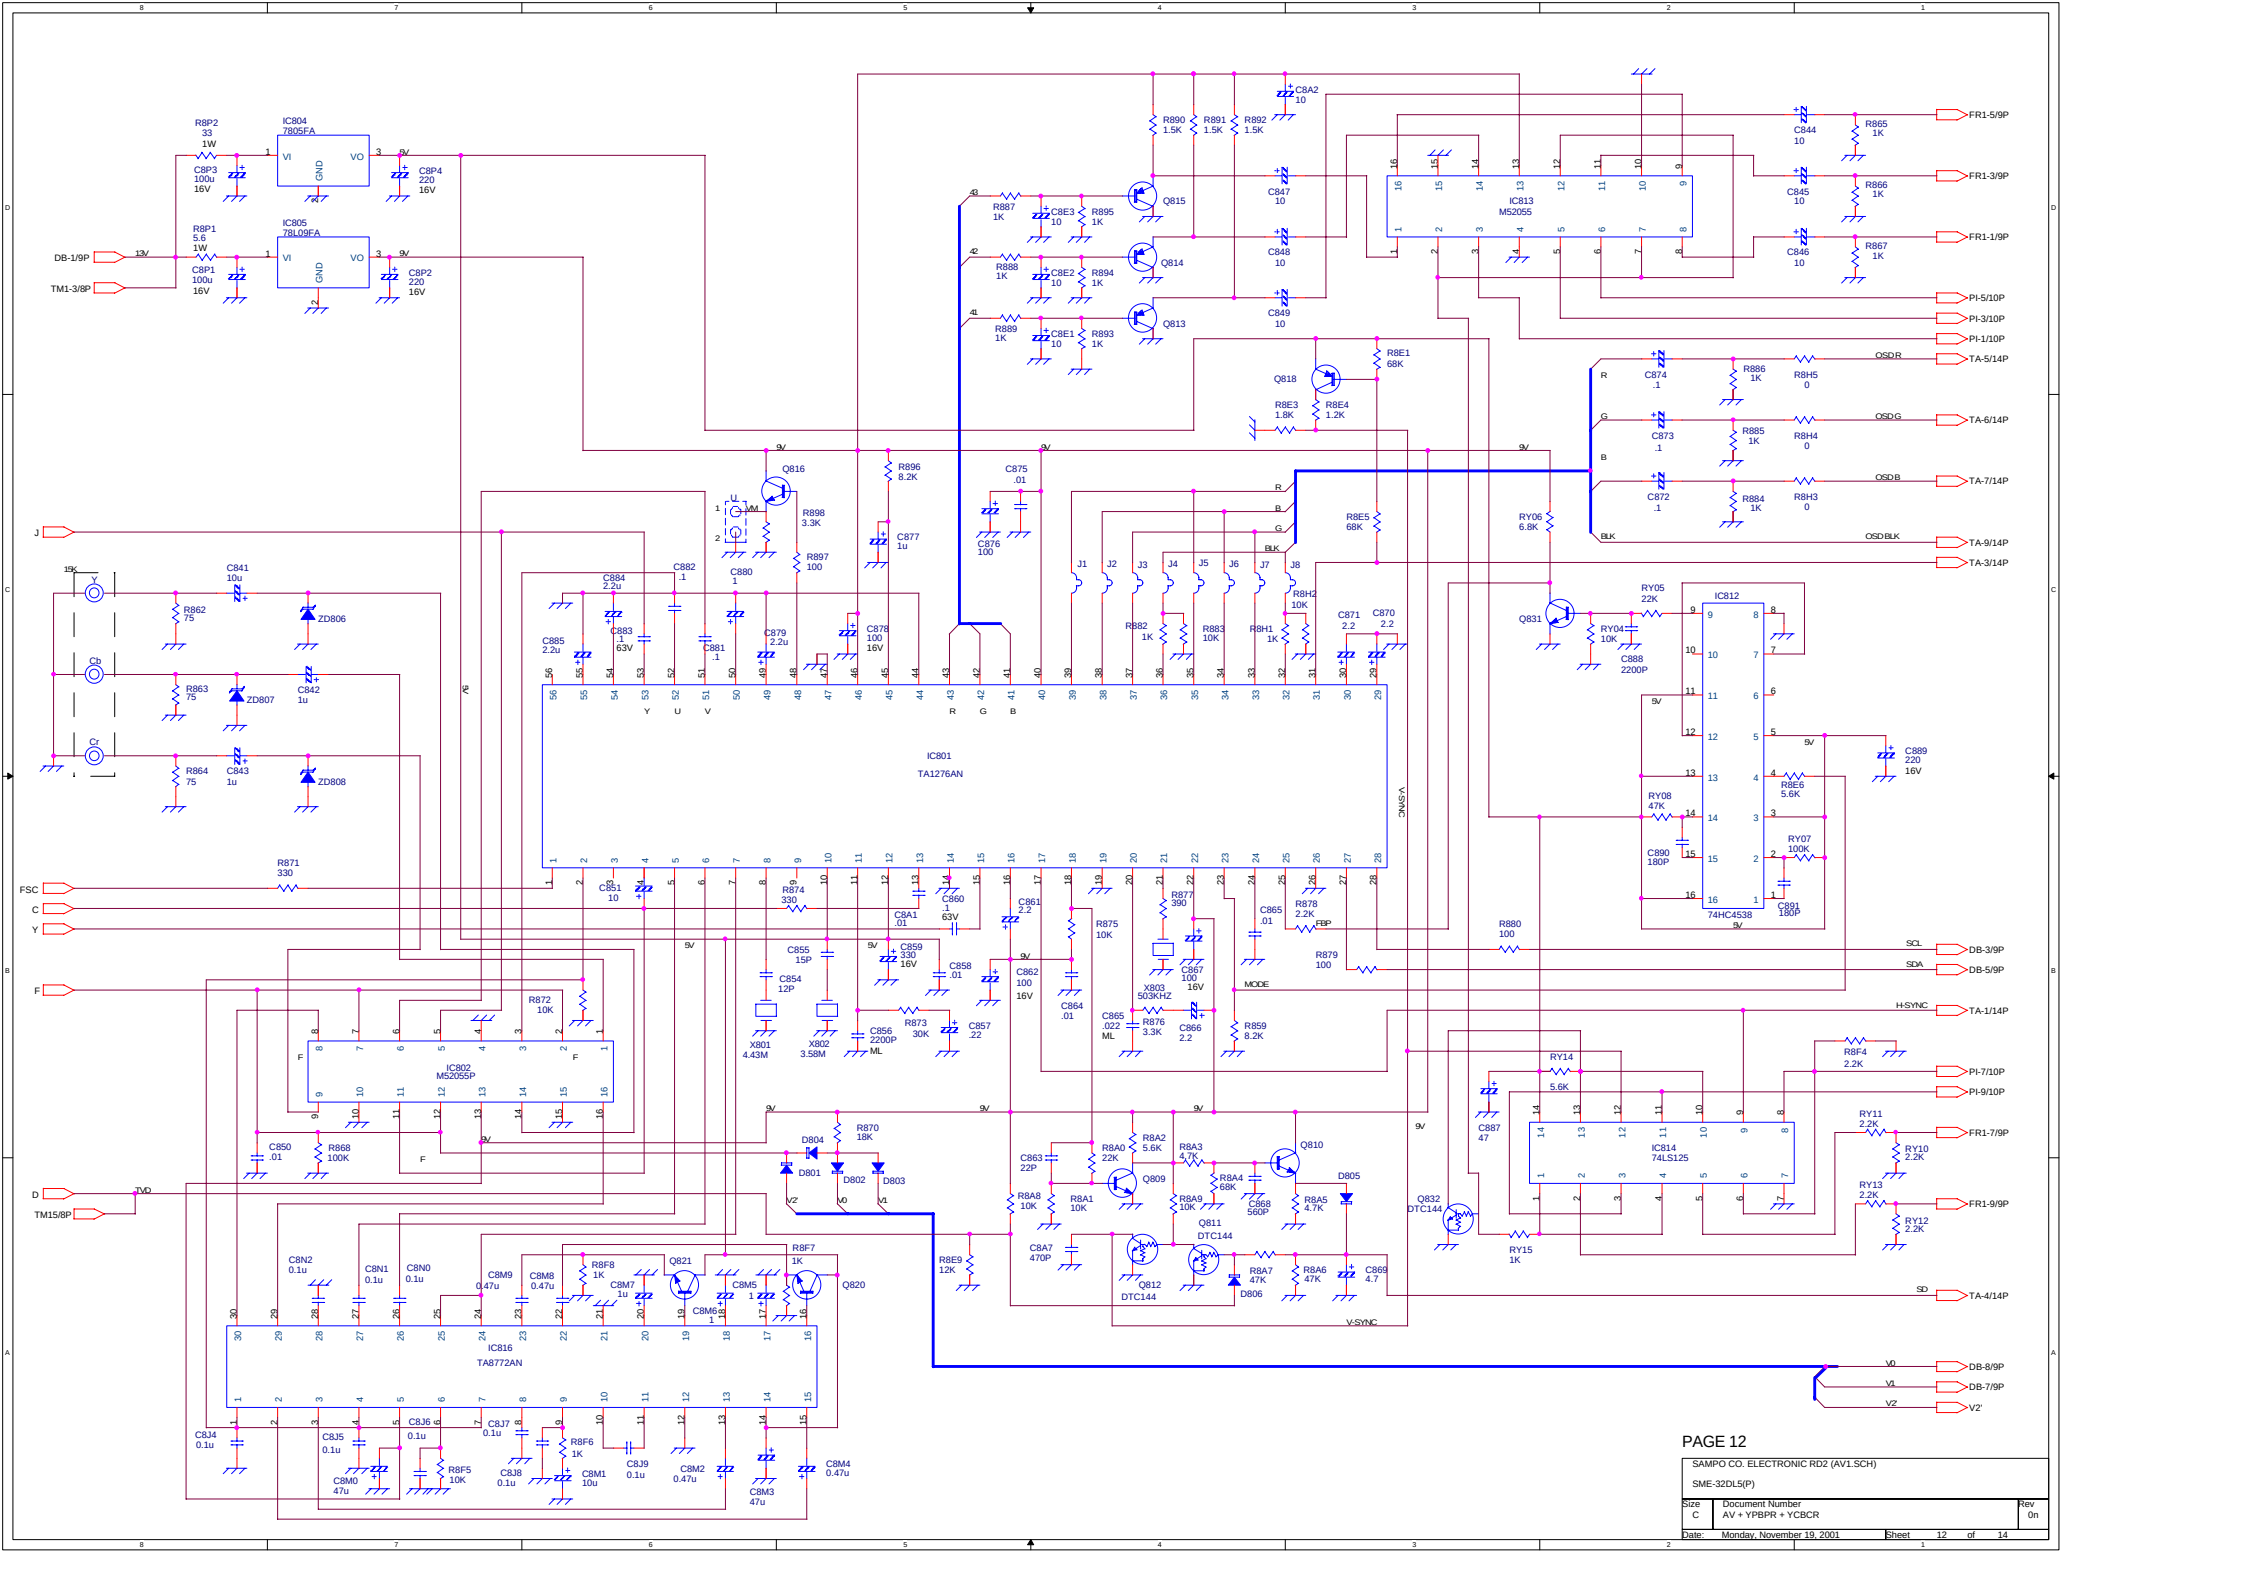

PAGE 12

SAMPO CO. ELECTRONIC RD2 (AV1.SCH)		
SME-32DL5(P)		
Size C	Document Number AV + YPBPR + YCBCR	Rev 0n
Date: Monday, November 19, 2001	Sheet 12 of 14	

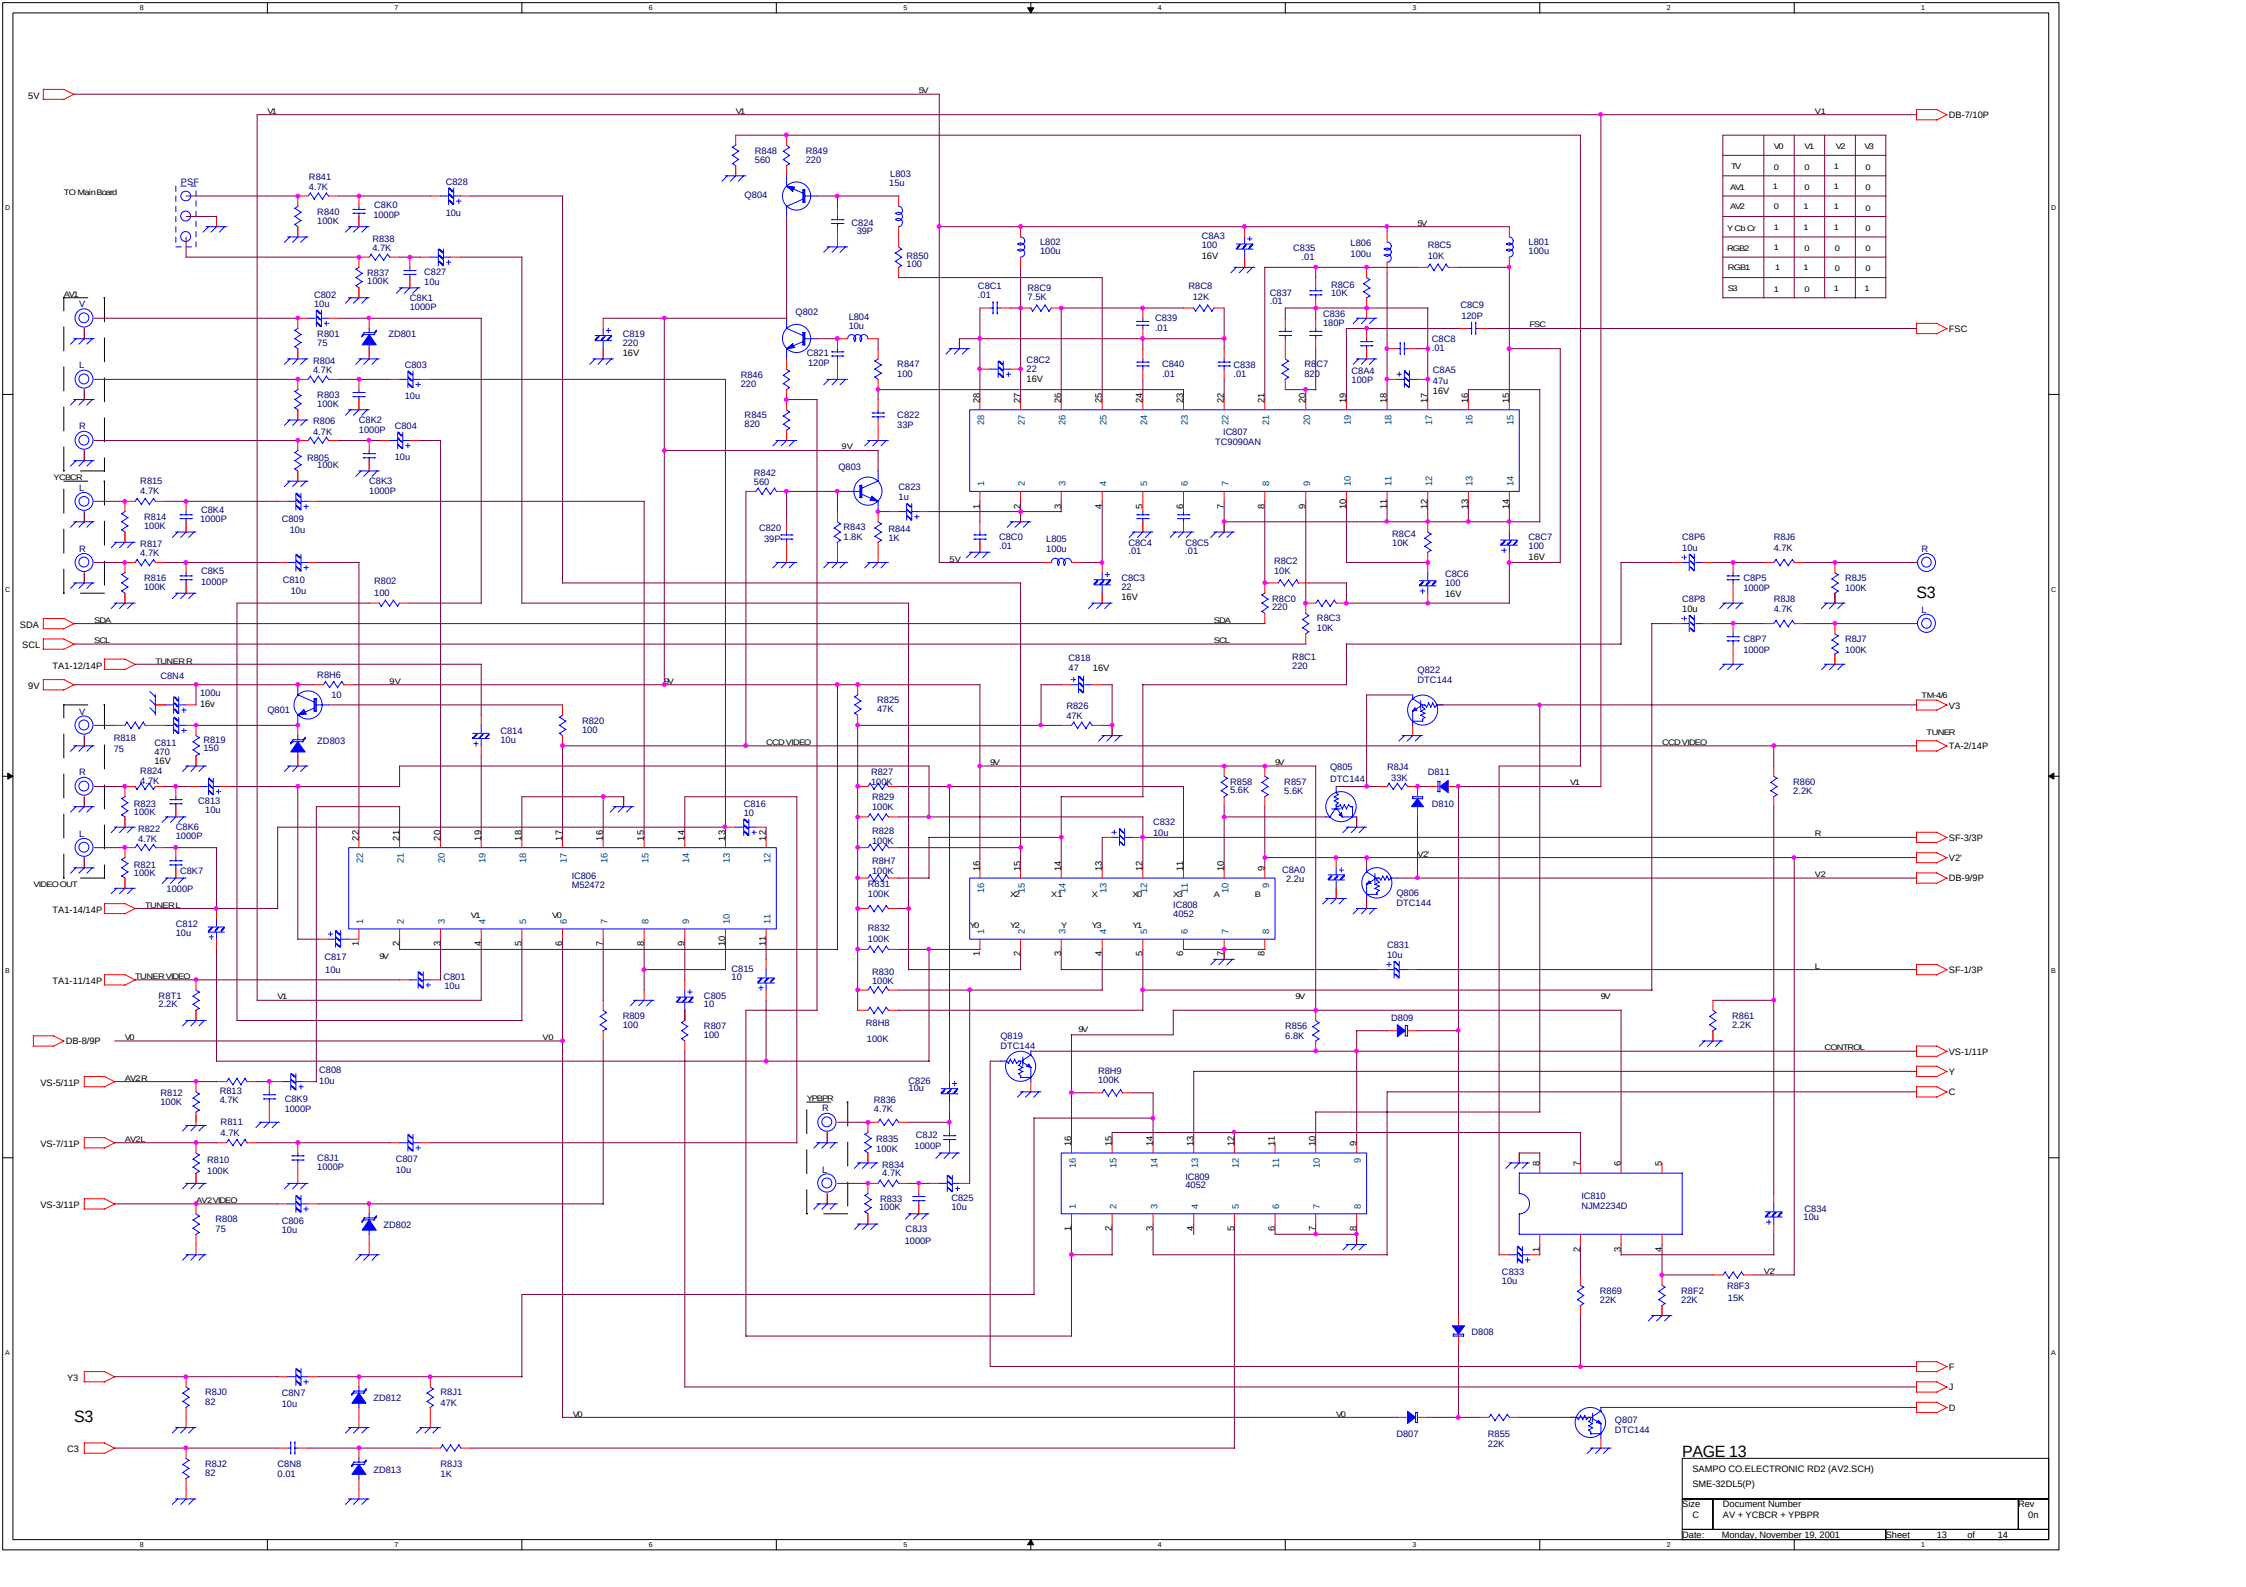

	V0	V1	V2	V3
TV	0	0	1	0
AV1	1	0	1	0
AV2	0	1	1	0
Y Cb Cr	1	1	1	0
RGB2	1	0	0	0
RGB1	1	1	0	0
S3	1	0	1	1

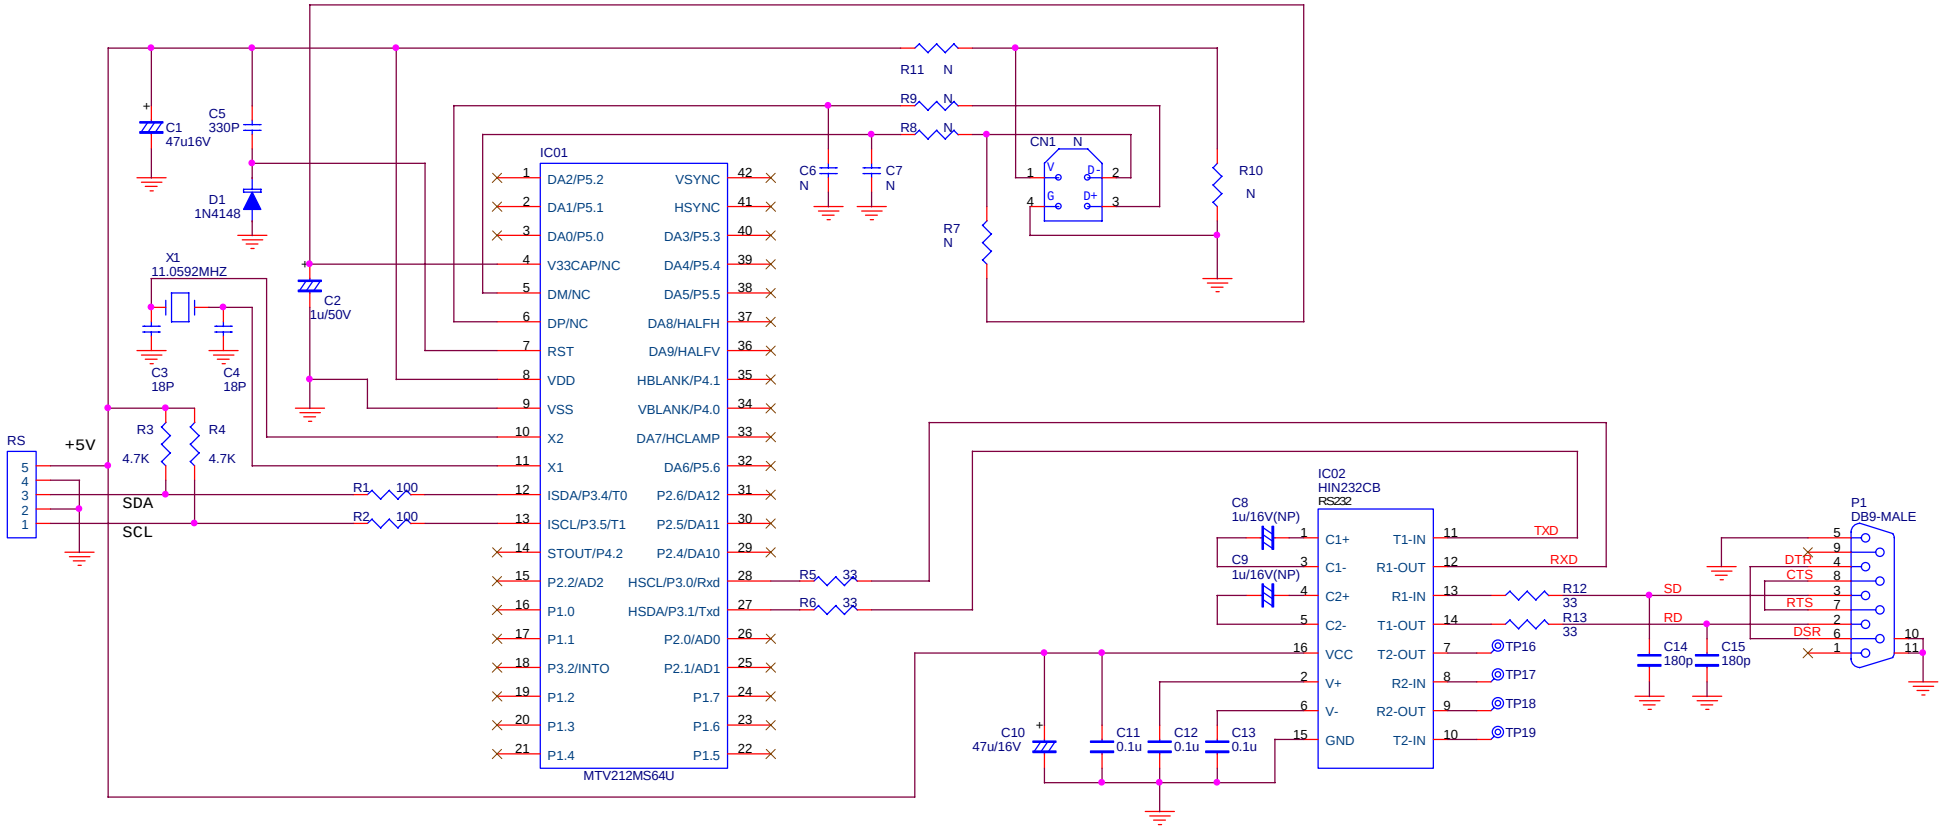

PAGE 14

SAMPO CO. ELECTRONIC RD2 (RS232.SCH)		
SME-32DL5(P)		
Size B	Document Number RS232	Rev 0
Date: Monday, November 19, 2001	Sheet 14 of 14	

SME-32DL5(P) ELECTRONIC PARTS LIST VER1.0

1. MAIN BOARD

∗ - represent the critical component

	MAIN PWB	81	QPWB51060-1G-B-	MAIN BOARD			
∗	BR701	54	VSIGBU6J-------	IC		GBU6J	
	C001	21	VCEACU1CG477M-P	470uF	16V	±20%	Aluminum Elect.
	C002,044	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
	C011,012	84	VCDCDU1HH120J-P	12PF	50V	±5%	Temp. Comp. Ceramic
	C013	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect.
	C015,022~026	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C020,033	44	VCKBDU1HY102K-P	1000PF	50V	±10%	High Diel. Ceramic
	C021	68	VCKBDU1HY101K-P	100PF	50V	±10%	High Diel. Ceramic
	C028,029,035	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C030	77	VCEACU1HG105M-P	1uF	50V	±20%	Aluminum Elect.
	C031,068	69	VCKBDU1HY471K-P	470PF	50V	±10%	High Diel. Ceramic
	C034	28	VCEACU1AG108M-P	1000uF	100V	±20%	Aluminum Elect.
	C037,043,050	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C042	52	VCEACU1AG107M-P	100uF	10V	±20%	Aluminum Elect.
	C045,046	22	VCDCDU1HH330J-P	33PF	50V	± 5%	Temp. Comp. Ceramic
	C047	43	VCMECU1JG473J-P	.047uF	63V	± 5%	Metal Ploy. Film
	C049	53	VCEACU1AG477M-P	470uF	10V	±20%	Aluminum Elect.
	C051,052,053	88	VCKBDU1HY331K-P	330PF	50V	±10%	High Diel. Ceramic
	C060~064	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C066,067,0C1	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C073,075,076	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C080,099	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
	C086	26	VCEACU1HG226M-P	22uF	50V	±20%	Aluminum Elect.
	C104~107	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C112,114	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C121,121L,122	43	VCEACU1VG476M-P	47uF	35V	±20%	Aluminum Elect.
	C131	17	VCEACU1CG226M-P	22uF	16V	±20%	Aluminum Elect.
	C190A~192A	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C501	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C502	18	VCEACU1VG107M-P	100uF	35V	±20%	Aluminum Elect.
	C503	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C504	81	VCPELF1HG224J--	.22uF	50V	±5%	Polypropylene Film
	C505	77	VCEACU1HG105M-P	1uF	50V	±20%	Aluminum Elect.
	C507	29	VCEACU1HG107M-P	100uF	50V	±20%	Aluminum Elect.
	C510,511,530	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
	C512	87	VCSBDU1HY223K-P	.022uF	50V	±20%	Semiconductor Ceramic
	C601	26	VCEACU1HG226M-P	22uF	50V	±20%	Aluminum Elect.
	C602	27	VCKBDU2HY221K-P	220PF	500V	±10%	High Diel. Ceramic
	C603,670,6D0	77	VCEACU1HG105M-P	1uF	50V	±20%	Aluminum Elect.
	C604	67	VCEACU1JG107M-P	100uF	63V	±20%	Aluminum Elect.
	C605	09	VCMPHF2AG824J--	.82uF	100V	±5%	Metal Ploy. Film
	C606	49	RC-MP912J-13C--	9100PF	1.6KV	±5%	Metal Ploy. Film
	C607	30	VCKBDU2HY102K-P	1000PF	500V	±10%	High Diel. Ceramic
	C612,614	17	VCKBDF2HY682K--	6800PF	500V	±10%	High Diel. Ceramic
	C613,617,686	50	VCDCDU2HH220J-P	22PF	500V	±5%	Temp. Comp. Ceramic
	C615	52	VCEACU1AG107M-P	100uF	10V	±20%	Aluminum Elect.
	C620,621,667	77	VCEACU1EG107M-P	100uF	25V	±20%	Aluminum Elect.
	C622,651,653	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic

	C623	71	VCPPHF3CG272J--	3300PF	1.6KV	±5%	Polypropylene Film
	C624	64	VCKBDU1HY332K-P	3300PF	50V	±10%	High Diel. Ceramic
*	C625	32	VCPPLU2AY102G-P	1000PF	100V	±2%	Polypropylene Film
	C631	41	VCKBDU1HY221K-P	220PF	50V	±10%	High Diel. Ceramic
	C634,638,639	50	VCEACU1HG225M-P	2.2uF	50V	±20%	Aluminum Elect.
	C635	84	VCPPLU2AY681G--	2700PF	200V	±2%	Polypropylene Film
	C637,655	21	VCEACU1CG477M-P	470uF	16V	±20%	Aluminum Elect.
	C640	60	VCPELU1HG104J-P	.1uF	50V	±5%	Polypropylene Film
	C643	15	VCPELU1HG333J-P	.033uF	50V	±5%	Polypropylene Film
	C644	68	VCKBDU1HY101K-P	100PF	50V	±10%	High Diel. Ceramic
	C645	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C646,680,6T1	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect.
	C647,696	18	VCMECU1JG104J-P	.1uF	63V	±5%	Metal Ploy. Film
	C648	08	RC-MP103J-13C--	.01uF	1.6KV	±5%	Metal Ploy. Film
	C649	54	VCPPHF2JG822J--	8200PF	630V	±5%	Polypropylene Film
	C650	42	VCPPHF2GG272J--	2700PF	400V	±5%	Polypropylene Film
	C654,662	10	VCMECU2AG222J-P	2200PF	100V	±5%	Metal Ploy. Film
	C660,699	44	VCKBDU1HY102K-P	1000PF	50V	±10%	High Diel. Ceramic
	C661,664,666	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C663	45	VCKBDU1HY472K-P	4700PF	50V	±10%	High Diel. Ceramic
	C665	21	VCKBDU1HY392K-P	3900PF	50V	±10%	High Diel. Ceramic
	C668	30	VCDCDU1HH680J-P	68PF	50V	±5%	Temp. Comp. Ceramic
	C669	15	VCPPHF2GG224J--	.22uF	400V	±5%	Polypropylene Film
	C671	22	VCEACF2EG107M--	100uF	250V	±20%	Aluminum Elect.
	C672	18	VCPPHF2DG123J--	.012uF	200V	±5%	Polypropylene Film
	C674,6D3	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
	C675,6E4	20	VCKBDU1HY271K-P	270PF	50V	±10%	High Diel. Ceramic
	C682,684	17	VCKBDF2HY682K--	6800PF	500V	±10%	High Diel. Ceramic
	C691	77	VCPELU1HG123J--	.012uF	50V	±5%	Polypropylene Film
	C692	88	VCMPHF2AG103G--	.01uF	100V	±2%	Metal Ploy. Film
	C693	80	VCMECU1JG224J-P	.22uF	63V	±5%	Metal Ploy. Film
	C694,6C3	68	VCMECU2AG822J-P	8200PF	100V	±5%	Metal Ploy. Film
	C697	11	VCMECU1JG124J-P	.12uF	63V	±5%	Metal Ploy. Film
	C6A0,6A3	21	VCEACU1CG477M-P	470uF	16V	±20%	Aluminum Elect.
	C6A1	03	VCDCDU1HH470J-P	47PF	50V	±5%	Temp. Comp. Ceramic
*	C6A4	87	VCPELU1HG563J-P	.056uF	50V	±5%	Polypropylene Film
	C6A6	64	VCEACF1CG336M-P	33uF	16V	±20%	Aluminum Elect.
	C6A9,6B1	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
	C6C1	03	VCEACU1JG476M-P	47uF	63V	±20%	Aluminum Elect.
	C6C2,6C9,6P1	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C6C6	26	VCKBEF3DY103Z--	.01uF	2KV	+80%-20%	High Diel. Ceramic
	C6D2	28	VCPPHF3CG392J--	3900PF	1.6KV	±5%	Polypropylene Film
	C6D4	88	VCEACU2EG476M-P	47uF	250V	±20%	Aluminum Elect.
	C6D6	41	VCMPHF2EG225J--	2.2uF	250V	±5%	Metal Ploy. Film
*	C6D7	82	VCEACU1CG227M-P	220uF	16V	±20%	Aluminum Elect.
*	C6D9	26	VCEACU1HG226M-P	22uF	50V	±20%	Aluminum Elect.
	C6E0	14	VCENCU2DG475M--	4.7uF	200V	±20%	Aluminum Elect.
	C6E1,6E5,6E6	68	VCKBDU1HY101K-P	100PF	50V	±10%	High Diel. Ceramic
	C6E2	86	VCPPHF2GG333J--	.033uF	400V	±5%	Polypropylene Film
	C6E3	39	VCKBDU3AY102K-P	1000PF	1000V	±10%	High Diel. Ceramic
	C6E8	82	VCKBDU2HY681K-P	680PF	500V	±10%	High Diel. Ceramic

	C6I1	70	VCEHCF1HG475M--	4.7uF	50V	±20%	Aluminum Elect.
	C6I2	47	VCKBDU1HY562K-P	5600PF	50V	±10%	High Diel. Ceramic
	C6I3,6T2	82	VCEACU1CG227M-P	220uF	16V	±20%	Aluminum Elect.
	C6I4,6I6	73	VCEACU1HG336M-P	33uF	50V	±20%	Aluminum Elect.
	C6I5	78	VCEACU1HG475M-P	4.7uF	50V	±20%	Aluminum Elect.
	C6I7	70	VCMECU1JG683J-P	.068uF	63V	±5%	Metal Ploy. Film
*	C701,704	65	VCPEEF7EY474MX1	.47uF	AC250V	±20%	Polypropylene Film
*	C702,703	33	VCKEDF7GY222MX3	2200PF	AC400V	±20%	High Diel. Ceramic
	C705	36	VCKEDF7GY103MX3	.01uF	AC400V	±20%	High Diel. Ceramic
*	C706,707	61	VCKEDF7GY472MX3	4700PF	AC400V	±20%	High Diel. Ceramic
*	C709	16	VCEALS2GY337M--	330uF	400V	±20%	Aluminum Elect.
	C711	84	VCEACU2EG225M-P	2.2uF	250V	±20%	Aluminum Elect.
	C712	50	VCEACU1HG225M-P	2.2uF	50V	±20%	Aluminum Elect.
*	C713	12	VCEACU1HG104M-P	.1uF	50V	±20%	Aluminum Elect.
	C714,7P1	43	VCEACU1VG476M-P	47uF	35V	±20%	Aluminum Elect.
	C715,719	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
	C716	45	VCKBDU1HY472K-P	4700PF	50V	±10%	High Diel. Ceramic
	C717	35	VCPELU1HG152J-P	1500PF	50V	±5%	Polypropylene Film
	C726	84	VCPELU1HG103J-P	.01uF	50V	±5%	Polypropylene Film
	C727,735	78	VCEACU1HG475M-P	4.7uF	50V	±20%	Aluminum Elect.
	C731	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
*	C732,733	61	VCKEDF7GY103MX3	10NF	AC400V	±20%	High Diel. Ceramic
	C736,718	44	VCKBDU1HY102K-P	1000PF	50V	±10%	High Diel. Ceramic
	C737	10	VCMECU2AG222J-P	2200PF	100V	±5%	Metal Ploy. Film
	C741~745,796	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect.
	C755	52	VCDCDF3AH101K--	100PF	1000V	±10%	Temp. Comp. Ceramic
	C756	04	VCEACF2EH107M--	100uF	250V	±20%	Aluminum Elect.
	C757	88	VCEACU2EG476M-P	47uF	250V	±20%	Aluminum Elect.
	C758,766	53	VCEACF1HG108M--	100uF	50V	±20%	Aluminum Elect.
	C760	17	VCEACF1CG228M-P	2200uF	16V	±20%	Aluminum Elect.
	C764	21	VCEACU1CG477M-P	470uF	16V	±20%	Aluminum Elect.
	C765	52	VCEACU1AG107M-P	100uF	10V	±20%	Aluminum Elect.
	C767	26	VCEACU1HG226M-P	22uF	50V	±20%	Aluminum Elect.
	C7A2	60	VCEACU2EG226M-P	22uF	250V	±20%	Aluminum Elect.
	CR01	20	VCENCU1CG476M--	47uF	16V	±20%	Aluminum Elect.
	D001,005,009	89	VSD1N4148-----U	Diode		1N4148	
	D035,038	89	VSD1N4148-----U	Diode		1N4148	
	D104~113	89	VSD1N4148-----U	Diode		1N4148	
	D503	89	VSD1N4148-----U	Diode		1N4148	
	D601	34	VSDFR104-------	Diode		FR104	
	D602	01	VSDMUR115------	Diode		MUR115	
	D603	24	VSDFMQG5FMS----	Diode		FMQG5FMS	
	D604,607	89	VSD1N4148-----U	Diode		1N4148	
	D605,606	09	VSDRGP30G175---	Diode		RGP30G	
	D609,630	73	VSDSUF30J------	Diode		SUF30J	
	D610,611	89	VSD1N4148-----U	Diode		1N4148	
	D614,616~618	89	VSD1N4148-----U	Diode		1N4148	
	D615	74	VSD1N4002-----U	Diode		1N4002	
	D620	67	VSDRGP10G-----U	Diode		RGP10G	
	D621,622,631	89	VSD1N4148-----U	Diode		1N4148	
	D640~644	89	VSD1N4148-----U	Diode		1N4148	

	D661,663,694	89	VSD1N4148-----U	Diode	1N4148	
	D664	37	VSDSF16-------U	Diode	SF16	
	D6C1,6C2	03	VSDRGP02-16E--U	Diode	RGP02-16E	
	D6C5	09	VSDHER305------	Diode	HER305	
	D6C6,6I1,6K1	89	VSD1N4148-----U	Diode	1N4148	
*	D6C7	32	VSDRGP10D-----U	Diode	RGP10D	
	D701,713,714	89	VSD1N4148-----U	Diode	1N4148	
	D711,754	16	VSDBYV26DGP---U	Diode	BYV26DGP	
	D712	50	VSDFR103------U	Diode	FR103	
	D731,741	89	VSD1N4148-----U	Diode	1N4148	
	D753	85	VSDBY329X1200--	Diode	BY329X1200	
	D755,756	45	VSDHER303------	Diode	HER303	
	D757	25	VSDSR2100-----U	Diode	SR2100	
	D759	38	VSDFR203------U	Diode	FR203	
	D793,7P1,7P2	89	VSD1N4148-----U	Diode	1N4148	
	D7A1	03	VSD1N4001-----U	Diode	1N4001	
*	F701	03	QFS-D312S-12Y--	Fuse	3.1A/250V	
	FB101~103	69	RCORA1037-1---U	Core		
	FB601	15	RCORA1021-1---U	Core		
	FB602~604	69	RCORA1037-1---U	Core		
	FB701,702	80	RCORA1004-1----	Core		
	FB703	69	RCORA1037-1---U	Core		
	FB711,711A	15	RCORA1021-1---U	Core		
	FB751	15	RCORA1021-1---U	Core		
	IC001	59	VSIP87C380-----	IC	P87C380	
	IC002	49	VSIM24C08BN6---	IC	M24C08BN6	
	IC003	76	VSIMC141541P---	IC	MC141541P	
	IC004	35	VSIM62393P-----	IC	M62393P	
	IC006	81	VSIS-80740AH---	IC	80740H	
	IC101	71	VSI74LS125AN---	IC	LS125AN	
	IC102	69	VSIM52055P-----	IC	M52055P	
	IC106	19	VSIAT24C21-----	IC	AT24C21	
	IC501	81	VSITDA8351-----	IC	TDA8351	
	IC631	11	VSI74HC221-----	IC	74HC221	
	IC632	15	VSILM358N------	IC	LM358N	
	IC661	18	VSIUC3843------	IC	UC3843	
	IC691	86	VSITDA4854-----	IC	TDA4854	
	IC6C1	68	VSINJM2904D----	IC	NJM2904D	
	IC711	13	VSIKA3842A-----	IC	KA3842A	
*	IC712,713	15	VSIPC817C------	IC	PC817C	
	IC731	89	VSITL431CZ----P	Transistor	TL431CZ	
	IC791	54	VSILM2940CT12--	IC	LM2940CT12	
	IC792	84	VSINJM7805FA---	IC	NJM7805	
	IC793	04	VSINJM7809FA---	IC	NJM7809FA	
	J266	73	VRCPTV6--182J-U	1.8K ohm	1/6W 5% Carbon Film	
	L001	85	VL-DH120K0000-U	Peaking coil	12uH	
	L601	48	RCILL1074-1----	Coil		
	L602	30	RCILL1075-1----	Coil		
	L603	33	RCHOM1077-1320-	Choke		
	L604	67	RCHO-1132-1----	Choke		
	L605	30	VL-DH680K0000-U	Peaking coil	68uH	
	L661	49	RCHO-1139-1502B	Choke	5Mh	
	L6C1	88	RCHO-1141-1502-	Choke	5Mh	

L6I1	36	RCHO-1129-1371-	Coil	Pincushion coil	
L751,752,757	47	RCHO-1103-1111-	Choke		
L762	47	RCHO-1103-1111-	Choke		
L831	28	VL-DH101K0000-U	Peaking Coil	100uH	
Q001~003	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q010,012,034	82	VSIDTC144ES---P	IC	DTC144ES	
Q031,035	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q101	82	VSIDTC144ES---P	IC	DTC144ES	
Q102~104	57	VST2SC1906----P	Transistor	2SC1906	
Q120~122	57	VST2SC1906----P	Transistor	2SC1906	
Q501,502	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q503	82	VSIDTC144ES---P	IC	DTC144ES	
Q601	06	VST2SC3610----	Transistor	2SC3610----	
Q602,631,635	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q603	63	VST2SA1020Y---P	Transistor	2SA1020Y	
Q604	38	VST2SC5422-----	Transistor	2SC5422	
Q605,611,624	67	VST2SC1318R---P	Transistor	2SC1318R	
Q606,608	50	VSTIRF740------	Transistor	IRF740	
Q607,609	66	VSTKSP42------P	Transistor	KSP42	
Q612	22	VSTBD139-------	Transistor	BD139	
Q613	86	VSTBD140-------	Transistor	BD140	
Q615,622,623	87	VST2SA1015Y---P	Transistor	2SA1015Y	
Q620,629	50	VSTIRF740------	Transistor	IRF740	
Q621, 634	82	VSIDTC144ES---P	IC	DTC144ES	
Q625,630	66	VSTKSP42------P	Transistor	KSP42	
Q632	36	VSTMPS3646----P	Transistor	MPS3646	
Q661,664,691	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q663,6D3	87	VST2SA1015Y---P	Transistor	2SA1015Y	
Q665,6D4	50	VSTIRF740------	Transistor	IRF740	
Q692	63	VST2SA950Y----P	Transistor	2SC950Y	
Q693	75	VST2SC2120Y---P	Transistor	2SC2120Y	
Q694~696,6T1	82	VSIDTC144ES---P	IC	DTC144ES	
Q6C4	46	VST2SC4152-----	Transistor	2SC4152	
Q6C7	27	VST2SC1213C---P	Transistor	2SC1213C	
Q6C8	78	VST2SA673C----P	Transistor	2SA673C	
Q6C9	48	VST2SK1358-----	Transistor	2SK1358	
Q6D1	67	VST2SC1318R---P	Transistor	2SC1318R	
Q6D2,6D9	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q6I1	70	VST2SB861WC----	Transistor	2SB861WC	
Q6I2	43	VST2SB716ADTZ-P	Transistor	2SB716ADTZ	
Q6I3	23	VST2SD667AC---P	Transistor	2SD667AC	
Q6I4,6I5,6P1	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q701,712	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q711	82	VSIDTC144ES---P	IC	DTC144ES	
* Q713	86	VSTSTW11NB80---	Transistor	STW11NB80	
Q731,732	01	VST2SC1815Y---P	Transistor	2SC1815Y	
Q7A1	20	VST2SC3467E---P	Transistor	2SC3467E	
Q7A2	87	VST2SC2688-----	Transistor	2SC2688	
Q7A3	75	VST2SA1480E----	Transistor	2SA1480E	
R001,004	31	VRCPTV6--221J-U	220 ohm	1/6W 5%	Carbon Film
R002	05	RNWRA2019-1332	3.3K ohm		
R003,013,022	10	VRCPTV6--103J-U	10K ohm	1/6W 5%	Carbon Film
R005	07	VRCPTV6--222J-U	2.2K ohm	1/6W 5%	Carbon Film

R007	26	VRCPTV6--153J-U	15K ohm	1/6W	5%	Carbon Film
R008,019,6J4	73	VRCPTV6--182J-U	1.8K ohm	1/6W	5%	Carbon Film
R010	61	VRCPTV6--561J-U	560 ohm	1/6W	5%	Carbon Film
R011,012,071	78	VRCPTV6--331J-U	330 ohm	1/6W	5%	Carbon Film
R014,028	34	VRCPTV6--102J-U	1K ohm	1/6W	5%	Carbon Film
R015,045	59	VRCPTV6--471J-U	470 ohm	1/6W	5%	Carbon Film
R016	54	VRCPTV6--332J-U	3.3K ohm	1/6W	5%	Carbon Film
R018,035,053	74	VRMPTV6-8200F-U	82 ohm	1/6W	1%	Metal Film
R020,081,097	11	VRCPTV6--392J-U	3.9K ohm	1/6W	5%	Carbon Film
R024,041,043	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R0254,005A	54	VRCPTV6--332J-U	3.3K ohm	1/6W	5%	Carbon Film
R026	13	VRCPTV6--563J-U	56K ohm	1/6W	5%	Carbon Film
R027	35	VRCPTV6--472J-U	4.7K ohm	1/6W	5%	Carbon Film
R028,057,061	34	VRCPTV6--102J-U	1K ohm	1/6W	5%	Carbon Film
R033,038	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R034	11	VRCPTV6--473J-U	47K ohm	1/6W	5%	Carbon Film
R036,037,039	07	VRCPTV6--222J-U	2.2K ohm	1/6W	5%	Carbon Film
R040,042,044	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R046	55	VRMPTV6-1201F-U	1.2K ohm	1/6W	1%	Metal Film
R048	84	VRMPTV6-1501F-U	1.5K ohm	1/6W	1%	Metal Film
R050	54	VRMPTV6-1002F-U	10K ohm	1/6W	1%	Metal Film
R051	34	VRCPTV6--102J-U	1K ohm	1/6W	5%	Carbon Film
R052,054,055	78	VRMPTV6-1001F-U	1K ohm	1/6W	1%	Metal Film
R018,068	89	VRCPTV6—-821J-U	820 ohm	1/6W	5%	Carbon Film
R056,060,084	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R064	10	VRCPTV6--750J-U	75 ohm	1/6W	5%	Carbon Film
R066,091	62	VRCPTV6--682J-U	6.8K ohm	1/6W	5%	Carbon Film
R067,075	76	VRCPTV6--393J-U	39K ohm	1/6W	5%	Carbon Film
R069,073,074	35	VRCPTV6--472J-U	4.7K ohm	1/6W	5%	Carbon Film
R070,098,0C4	54	VRCPTV6--332J-U	3.3K ohm	1/6W	5%	Carbon Film
R078	76	VRCPTV6--474J-U	470K ohm	1/6W	5%	Carbon Film
R079	14	VRCPTV6--202J-U	2K ohm	1/6W	5%	Carbon Film
R080,0C7,0E1	34	VRCPTV6--102J-U	1K ohm	1/6W	5%	Carbon Film
R082,083	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R085~087,0C1	07	VRCPTV6--222J-U	2.2K ohm	1/6W	5%	Carbon Film
R088,089,092	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R090	50	VRCPTV6--152J-U	1.5K ohm	1/6W	5%	Carbon Film
R094,099	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R095	37	VRCPTV6--562J-U	5.6K ohm	1/6W	5%	Carbon Film
R0A1	02	VRCPTV6--154J-U	150K ohm	1/6W	5%	Carbon Film
R0A2	30	VRCPTV6--333J-U	33K ohm	1/6W	5%	Carbon Film
R0A3,0A4	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R0A7,0A8,0B1	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R0A9	75	VRCPTV6--104J-U	100K ohm	1/6W	5%	Carbon Film
R0B4	11	VRCPTV6--392J-U	3.9K ohm	1/6W	5%	Carbon Film
R0C2,0C3	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R0C6,0C9	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R0E2,0E3	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R101	87	VRCPTV4--471J-U	470 ohm	1/4W	5%	Carbon Film
R102	64	VRCPTV2--181J-U	180 ohm	1/2W	5%	Carbon Film
R103,104,105	86	VRCPTV6--681J-U	680 ohm	1/6W	5%	Carbon Film
R106	72	VRCPTV6--223J-U	22K ohm	1/6W	5%	Carbon Film
R107	62	VRCPTV6--682J-U	6.8K ohm	1/6W	5%	Carbon Film

	R108,111	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film
	R109,110	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
	R112,114,115	10	VRCPTV6--750J-U	75	ohm	1/6W	5%	Carbon Film
	R116	51	VRCPTV6--273J-U	27K	ohm	1/6W	5%	Carbon Film
	R120,122,123	27	VRCPTV6--122J-U	1.2K	ohm	1/6W	5%	Carbon Film
	R131,133	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
	R134,199	58	VRCPTV6--101J-U	100	ohm	1/6W	5%	Carbon Film
	R149	27	VRNMK01--181J--	180	ohm	1W	5%	Metal Oxide Film
	R190~192	27	VRCPTV6--122J-U	1.2K	ohm	1/6W	5%	Carbon Film
	R190A~192A	74	VRCPTV6--151J-U	150	ohm	1/6W	5%	Carbon Film
	R190B~192B	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	R501	65	VRMPTV6-7501F-U	7.5K	ohm	1/6W	1%	Metal Film
	R502	54	VRCPTV2--220J-U	22	ohm	1/2W	5%	Carbon Film
	R503	57	VRNMT02--R82J--	.82	ohm	2W	5%	Metal Oxide Film
	R505	12	VRNMK02--R22J--	.22	ohm	2W	5%	Metal Oxide Film
	R506	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	R507	48	VRNMT03--101J--	100	ohm	3W	5%	Metal Oxide Film
	R508	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film
	R515	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
	R516,519	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film
	R517,518	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R520	62	VRCPTV6--682J-U	6.8K	ohm	1/6W	5%	Carbon Film
	R521	17	VRCPTV6--824J-U	820K	ohm	1/6W	5%	Carbon Film
	R601,698	86	VRCPTV6--681J-U	680	ohm	1/6W	5%	Carbon Film
	R602,619,632	37	VRCPTV6--562J-U	5.6K	ohm	1/6W	5%	Carbon Film
	R603	51	VRNMT03--561J--	560	ohm	3W	5%	Metal Oxide Film
	R604,605,613	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	R606	29	VRCPTV2--682J-U	6.8K	ohm	1/2W	5%	Carbon Film
	R607	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R608	30	VRNLQ03--390J--	39	ohm	3W	5%	Metal Oxide Film
	R609	43	VRNMT03--680J--	68	ohm	3W	5%	Metal Oxide Film
	R610	14	VRNMK03--R56J--	.56	ohm	3W	5%	Metal Oxide Film
	R610A	54	VRCPTV4--470J-U	47	ohm	1/4W	5%	Carbon Film
	R612	61	VRNLQ05--561J--	39	ohm	3W	5%	Metal Oxide Film
	R614,6E8	75	VRCPTV6--104J-U	100K	ohm	1/6W	5%	Carbon Film
	R615,617,6F7	35	VRCPTV2--124J-U	120K	ohm	1/2W	5%	Carbon Film
	R616,618	58	VRCPTV4--333J-U	33K	ohm	1/4W	5%	Carbon Film
	R620,6A4	62	VRCPTV6--682J-U	6.8K	ohm	1/6W	5%	Carbon Film
	R621	31	VRCPTV6--221J-U	220	ohm	1/6W	5%	Carbon Film
*	R622	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R623,633,669	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film
	R625,637,6H9	03	VRCPTV6--123J-U	12K	ohm	1/6W	5%	Carbon Film
	R626,655	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	R627~630	41	VRCPTV6--823J-U	82K	ohm	1/6W	5%	Carbon Film
	R631,641	11	VRCPTV6--473J-U	47K	ohm	1/6W	5%	Carbon Film
	R635,638	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
	R634,668,6H1	73	VRCPTV6--182J-U	1.8K	ohm	1/6W	5%	Carbon Film
	R636	28	VRCPTV2--561J-U	560	ohm	1/2W	5%	Carbon Film
	R639,6F4	31	VRMPTV6-1202F-U	12K	ohm	1/6W	1%	Metal Film
	R639A	84	VRMPTV6-9311F-U	9.31K	ohm	1/6W	1%	Metal Film
	R639B	26	VRMPTV6-2701F-U	2.7K	ohm	1/6W	1%	Metal Film
	R642,643	14	VRCPTV4--104J-U	100K	ohm	1/4W	5%	Carbon Film
	R645,6I7	26	VRCPTV6--153J-U	15K	ohm	1/6W	5%	Carbon Film

	R646	60	VRMPTV6-1502F-U	15K	ohm	1/6W	1%	Metal Film
	R647	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film
	R652,673,689	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
	R653,658,685	11	VRCPTV6--473J-U	47K	ohm	1/6W	5%	Carbon Film
	R654	02	VRCPTV6--154J-U	150K	ohm	1/6W	5%	Carbon Film
	R659,690	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film
*	R660,664	25	VRCPTV6--100J-U	10	ohm	1/6W	5%	Carbon Film
	R661	86	VRMPTV6-5902F-U	59K	ohm	1/6W	1%	Metal Film
	R662,687,6P1	68	VRCPTV6--124J-U	120K	ohm	1/6W	5%	Carbon Film
	R663,651,683	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
	R666,667	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R670,6C4,6E3	76	VRCPTV6--393J-U	39K	ohm	1/6W	5%	Carbon Film
	R672	58	VRCPTV6--101J-U	100	ohm	1/6W	5%	Carbon Film
	R674	38	VRMPTV4-8252F-U	82.5K	ohm	1/4W	1%	Metal Film
	R675	14	VRMPTV6-6812F-U	68.1K	ohm	1/6W	1%	Metal Film
	R676	17	VRMPTV6-4021F-U	4.02K	ohm	1/6W	1%	Metal Film
	R681	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
	R682	83	VRMPTV6-3482F-U	34.8K	ohm	1/6W	5%	Metal Film
	R684,6H4	78	VRCPTV6--331J-U	330	ohm	1/6W	5%	Carbon Film
	R686	84	VRCPTV6--753J-U	75K	ohm	1/6W	5%	Carbon Film
*	R688	75	VRCPTV6--104J-U	100K	ohm	1/6W	5%	Carbon Film
	R691	79	VRMPTV6-4701F-U	4.7K	ohm	1/6W	1%	Metal Film
	R692,697	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film
	R693	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film
	R694	37	VRCPTV6--562J-U	5.6K	ohm	1/6W	5%	Carbon Film
	R695	79	VRMPTV6-2492F-U	24.9K	ohm	1/6W	1%	Metal Film
*	R696	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
	R699	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film
*	R6A2	75	VRMPTV6-1583F-U	158K	ohm	1/6W	1%	Metal Film
*	R6A3	55	VRMPTV6-2493F-U	249K	ohm	1/6W	1%	Metal Film
	R6A5,6B6	89	VRCPTV6--821J-U	820	ohm	1/6W	5%	Carbon Film
	R6A6	30	VRNMK02--100J--	10	ohm	2W	5%	Metal Oxide Film
*	R6A7	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film
*	R6A8	71	VRCPTV6--335J-U	3.3M	ohm	1/6W	5%	Carbon Film
*	R6A9	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film
	R6B1,6B2	62	VRCPTV4--102J-U	1K	ohm	1/4W	5%	Carbon Film
	R6B3	50	VRNMK02--330J--	33	ohm	2W	5%	Metal Oxide Film
	R6B7	28	VRCPTV6--560J-U	56	ohm	1/6W	5%	Carbon Film
	R6B8,6F5,6G9	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R6C1	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film
	R6C2,6D8	14	VRCPTV4--104J-U	100K	ohm	1/4W	5%	Carbon Film
	R6C3,6C7	58	VRCPTV4--333J-U	33K	ohm	1/4W	5%	Carbon Film
	R6C5	11	VRCPTV6--473J-U	47K	ohm	1/6W	5%	Carbon Film
	R6C6,6D7,6D9	41	VRCPTV6--823J-U	82K	ohm	1/6W	5%	Carbon Film
	R6C8	42	VRCPTV2--104J-U	100K	ohm	1/2W	5%	Carbon Film
	R6C9	56	VRCPTV2--1R0J-U	1	ohm	1/2W	5%	Carbon Film
	R6D1	81	VRCPTV2--184J-U	180K	ohm	1/2W	5%	Carbon Film
	R6D2	51	VRCPTV6--273J-U	27K	ohm	1/6W	5%	Carbon Film
	R6D3,6D4	45	VRCPTV2--564J-U	560K	ohm	1/2W	5%	Carbon Film
	R6D5,6I4	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film
	R6D6	52	VRCPTV6--242J-U	2.4K	ohm	1/6W	5%	Carbon Film
	R6E1,6G7	41	VRCPTV6--823J-U	82K	ohm	1/6W	5%	Carbon Film

	R6E4,6E5,6F1	58	VRCPTV6--101J-U	100	ohm	1/6W	5%	Carbon Film
	R6E6	87	VRCPTV6--220J-U	22	ohm	1/6W	5%	Carbon Film
	R6E9,6K9	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film
	R6F3	38	VRMPTV6-6811F-U	6.81K	ohm	1/6W	1%	Metal Film
	R6F6	63	VRCPTV4--472J-U	4.7K	ohm	1/4W	5%	Carbon Film
*	R6F9	82	VRNMK01--R18J--	.18	ohm	1W	5%	Metal Oxide Film
*	R6G0	32	VRCPTV6--391G-U	390	ohm	1/6W	2%	Carbon Film
*	R6G1	74	VRMPTV6-5110F-U	511	ohm	1/6W	1%	Metal Film
*	R6G2	26	VRCPTV6--153J-U	15K	ohm	1/6W	5%	Carbon Film
	R6G3	27	VRCPTV6--274J-U	270K	ohm	1/6W	5%	Carbon Film
	R6G4	78	VRCPTV6--564J-U	560K	ohm	1/6W	5%	Carbon Film
	R6G5	01	VRCPTV2--102J-U	1K	ohm	1/2W	5%	Carbon Film
	R6G6	45	VRNMK01--470J--	47	ohm	1W	5%	Metal Oxide Film
	R6H0,6J2	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R6H5	75	VRCPTV6--272J-U	2.7K	ohm	1/6W	5%	Carbon Film
	R6H6,6K2	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film
	R6H8	68	VRCPTV6--124J-U	120K	ohm	1/6W	5%	Carbon Film
	R6I0	73	VRNMK02--3R9J--	3.9	ohm	2W	5%	Metal Oxide Film
	R6I1	09	VRNLQ03--4R7K--	4.7	ohm	3W	10%	Metal Oxide Film
	R6I2	53	VRNLQ03--100J--	10	ohm	3W	5%	Metal Oxide Film
	R6I3	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film
	R6I5	27	VRCPTV6--122J-U	1.2K	ohm	1/6W	5%	Carbon Film
	R6I6,6K1,6K8	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
	R6I8	82	VRCPTV6-6040F-U	604	ohm	1/6W	1%	Metal Oxide Film
	R6I9	57	VRCPTV6-2101F-U	2.1K	ohm	1/6W	1%	Metal Oxide Film
	R6J0,6J1	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film
	R6J3	49	VRCPTV6--183J-U	18K	ohm	1/6W	5%	Carbon Film
	R6K3	13	VRNMT03--R56J--	.56	ohm	3W	5%	Metal Oxide Film
	R6K7	78	VRCPTV6--2R2J-U	2.2	ohm	1/6W	5%	Carbon Film
	R6M1,6M2	59	VRCPTV6--471J-U	470	ohm	1/6W	5%	Carbon Film
	R6P2	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film
	R6T1	75	VRCPTV6--272J-U	2.7K	ohm	1/6W	5%	Carbon Film
	R6T2	26	VRCPTV6--1R5J-U	1.5	ohm	1/6W	5%	Carbon Film
	R6X1,6X2	58	VRCPTV6--101J-U	100	ohm	1/6W	5%	Carbon Film
	R701	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film
	R702	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
*	R703,704	30	VRCPTV4--154J-U	150K	ohm	1/4W	5%	Carbon Film
	R706	76	VRCPTV4--224J-U	220K	ohm	1/4W	5%	Carbon Film
	R707,711,712	53	VRCPTV4--184J-U	180K	ohm	1/4W	5%	Carbon Film
	R708	62	VRCPTV6--682J-U	6.8K	ohm	1/6W	5%	Carbon Film
	R714,715	55	VRCPTV4--274J-U	270K	ohm	1/4W	5%	Carbon Film
	R716,717	60	VRNMK01--823J--	82K	ohm	1W	5%	Metal Oxide Film
	R718	57	VRNMK01--683J--	68K	ohm	1W	5%	Metal Oxide Film
	R719	43	VRMMTV2--680J-U	68	ohm	1/2W	5%	Metal Film
	R720,721	75	VRCPTV6--104J-U	100K	ohm	1/6W	5%	Carbon Film
	R722	87	VRCPTV6--220J-U	22	ohm	1/6W	5%	Carbon Film
	R723	27	VRCPTV6--122J-U	1.2K	ohm	1/6W	5%	Carbon Film
	R724	87	VRNMK03--R22J--	.22	ohm	3W	5%	Metal Oxide Film
	R725	70	VRNMK02--R27J--	.27	ohm	2W	5%	Metal Oxide Film
	R726	33	VRMPTV6-3012F-U	30.1K	ohm	1/6W	1%	Metal Film
	R727,7P2	49	VRCPTV6--183J-U	18K	ohm	1/6W	5%	Carbon Film
	R728	51	VRCPTV6--273J-U	27K	ohm	1/6W	5%	Carbon Film
	R729,753	38	VRCPTV4--103J-U	10K	ohm	1/4W	5%	Carbon Film

	R730	37	QJUM-1039-1540U	Jumper				
	R731,7A5	87	VRMPTV4-2673F-U	267K	ohm	1/4W	1%	Metal Film
	R732	54	VRCPTV4--153J-U	15K	ohm	1/4W	5%	Carbon Film
	R733	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	R734	78	VRCPTV4--152J-U	1.5K	ohm	1/4W	5%	Carbon Film
	R735	63	VRCPTV4--472J-U	4.7K	ohm	1/4W	5%	Carbon Film
	R736,741	76	VRCPTV6--393J-U	39K	ohm	1/6W	5%	Carbon Film
	R737,743	14	VRCPTV4--104J-U	100K	ohm	1/4W	5%	Carbon Film
	R738	14	VRCPTV6--202J-U	2K	ohm	1/6W	5%	Carbon Film
	R739	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
	R740	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film
	R742	58	VRCPTV4--333J-U	33K	ohm	1/4W	5%	Carbon Film
	R748	33	RR-NZR18J-101--	.18	ohm	1W	5%	Metal Oxide Film
	R754,755	01	VRMPTV2--472J-U	4.7K	ohm	1/2W	5%	Metal Film
	R756	58	VRCPTV2--154J-U	150K	ohm	1/2W	5%	Carbon Film
	R791	56	VRCPTV2--1R0J-U	1	ohm	1/2W	5%	Carbon Film
	R793	19	VRNMK01--1R0J--	1	ohm	1W	5%	Metal Oxide Film
	R794	28	VRCPTV4--1R0J-U	1	ohm	1/4W	5%	Carbon Film
	R7A2	67	VRCPTV2--392J-U	3.9K	ohm	1/2W	5%	Carbon Film
	R7A3	82	VRMPTV4-1002F-U	10K	ohm	1/4W	1%	Metal Film
	R7A4	60	VRMPTV4-7500F-U	75	ohm	1/4W	1%	Metal Film
	R7A6	45	VRNMK01--153J--	15K	ohm	1W	5%	Metal Oxide Film
	R7A7	41	VRCPTV4--563J-U	56K	ohm	1/4W	5%	Carbon Film
	R7A8	87	VRNMK01--3R9J--	3.9	ohm	1W	5%	Metal Oxide Film
	R7P1	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film
	RP97	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
	RV81	38	VRCPTV6--683J-U	68K	ohm	1/6W	5%	Carbon Film
	RL601,603,604	85	RRLYD1088-1DXG-	Relay				
	RL602	78	RRLYD1085-1DDG-	Relay				
*	RL701	33	RRLYD1080-1PDG-	Relay				
	RGB181,182	07	QSOCD1550-115--	D-SUB 15P				
	RGB183	40	QSOCD1558-124--	D-SUB 9P				
	SG601	29	QSPG-1011-1---U	SPARK GAP				
*	SO701	64	QSOCP1042-12X--	Socket				
	T601	26	RTRND1060-1----	Horizontal Driver Transformer				
	T602	39	RTRN-1060-1----	Transformer				
	T603,604	68	RTRN-1059-1----	Transformer				
	T6C1	14	RTRNF1006-1----	Dynamic Focus Transformer				
*	T6C2	42	DFBTCC150-1660-	FBT				
*	T701	02	RCVTP1381-1----	Convert transformer				
*	T702	10	RCILF1088-1----	Coil				
*	T703	68	RCILF1080-1----	Coil				
*	TH701	24	VSH20S050M-----					
*	TH702	49	VSQDGC2R9R0Q---					
	VR601	66	RVRSH6032-1502-	Variable Resistor	5K	ohm		
	VR691	70	RVRSH8003-8104-	Variable Resistor	100K	ohm		
	VR731	05	RVRSH6032-1501-	Variable Resistor	500	ohm		
*	VZ701	40	VSVV14K300-----					
	X001	41	RCRSL1045-1----	Crystal	12MHZ			
	ZD001	64	VSZMTZJ5.1B---U	Zener Diode	MTZJ5.1B			
	ZD005,007	61	VSZHZ5C1------U	Zener Diode	HZ5C1			
	ZD101	61	VSZHZ5C1------U	Zener Diode	HZ5C1			

ZD110	23	VSZHZ12A1-----U	Zener Diode	HZ12A1
ZD111~114	64	VSZMTZJ5.1B---U	Zener Diode	MTZJ5.1B
ZD102,123,125	64	VSZMTZJ5.1B---U	Zener Diode	MTZJ5.1B
ZD601,605,606	64	VSZMTZJ5.1B---U	Zener Diode	MTZJ5.1B
ZD603,604	80	VSZHZ12C1-----U	Zener Diode	HZ12C1
ZD608	49	VSZMTZ9.1B----U	Zener Diode	MTZ9.1B
ZD611,612	80	VSZHZ12C1-----U	Zener Diode	HZ12C1
ZD661,6C2	22	VSZRD15EB3----U	Zener Diode	RD15EB3
ZD6C1	35	VSZHZ20-02----U	Zener Diode	HZ20-02
ZD711,731	23	VSZHZ12A1-----U	Zener Diode	HZ12A1
ZD712	70	VSZHZ18-2-----U	Zener Diode	HZ18-2
ZD713	61	VSZHZ5C1------U	Zener Diode	HZ5C1
ZD7A1	54	VSZMTZ6.8B----U	Zener Diode	MTZ6.8B
“D”	02	QCNCP1547-1----	Connector With Wire	
“GND1,2”	50	QCNCP1517-1----	Connector With Wire	
	62	VCNCP0022-----U	Connector TH701 USE	
“M”	62	VCNCP0022-----U	Connector	
“O”	03	QCNCP1542-1----	Connector With Wire	
“RO”	42	QCNCP1540-1----	Connector With Wire	
“U”	09	VCNCP0305-EJST-	Connector	
CV	80	QCNWS0046-1151-	Connector With Wire	
HS	36	QCNWS0047-1063-	Connector With Wire	
KH	82	QCNWS0049-1051-	Connector With Wire	
TM	51	QCNWS0306-1104-	Connector With Wire	
A	48	QCNWS0307-1069-	Connector With Wire	
A1	57	QCNWS0303-1304-	Connector With Wire	
DB	39	QCNWS030B-1019-	Connector With Wire	
PI	77	QCNWS030A-1021-	Connector With Wire	
VS	67	QCNWS030B-1018-	Connector With Wire	
PO	12	QCNWS0044-1272-	Connector With Wire	
FR1	57	QCNWS0309-1037-	Connector With Wire	
RS	65	QCNWS0305-1189-	Connector With Wire	
PS	46	QCNWS0303-1296-	Connector With Wire	
	21	GHLDP0068-1FD--	LED HOLD FOR POWER, SAVING, STAND BY USE	
	43	QSW-A1199-11-1A	VOL +/-, MENU +/-, DEGAUSS, I/P SW	
	04	QSW-A1198-11-1-	POWER SW	
	03	VSI93M2AKLSH---	R/C RECEUVER	
	13	LANGF0729-1P--A	AC & RS232 ANGLE	
	76	LFIX-0016-1P---	FIX PLATE	
	68	PCUSG0219-1----	Silicon Rubber Q6I1 USE	
	85	PCUSP0054-1----	Silicon Rubber Q6C9,Q713 USE	
	31	PCUSP0057-1----	Silicon Rubber Q6I1 USE	
	64	PCUSU0131-1----	Cushion EVA FOR FBT	
	58	PISLM0015-1P---	Insulator Q604 USE	
	60	PRDAA0117-1P--I	RADIATOR Q6I1 USE	
	84	PRDAA0140-1P--B	RADIATOR Q665,Q6D4 USE	
	89	PRDAA0143-1P---	RADIATOR D753,IC791,IC793, Q606,Q620 USE	
	57	PRDAA0143-1P--A	RADIATOR Q7A2 USE	
	07	PRDAA0164-1P--A	RADIATOR IC501 USE	
	36	PRDAA0170-1P--B	RADIATOR BR701,Q713 USE	
	77	PRDAA0171-1P---	RADIATOR Q601,Q612,Q613 USE	
	14	PRDAA0176-1P--B	RADIATOR D603,Q604,6C9 USE	
	16	PRDAM0035-1P---	RADIATOR D609,630,D755,D756 USE	

71	QFSHC1017-1---P	F701 USE
71	QJAKM1076-1----	RGB-Audio jack
65	QPINR1069-1----	PIN R503,507,603,609,6K3 USE
08	QSOCI1177-108--	IC socket IC002 USE
76	QSOCI1517-142--	IC socket IC001 USE
46	XBPSD30P06000--	SCREW PRDAA0171*3 USE
39	XBPSD30P10000--	SCREW D753,IC791,IC793,Q606,Q620,Q665,Q6D4,Q7A2 USE
58	XEASD30P10000--	SCREW FBT*2
74	XHISE40P08TV0--	SCREW LANGF0729*1
77	XJASD30P10000--	SCREW Q6I1,PRDAA0170*2,PRDAA0176*4 USE
82	XJJSD30P10000--	SCREW IC501*2 USE
66	XLMAZ32-89000--	SCREW SO701 USE

	87	BRC-229B-------	R/C
	52	DBOXS0014-1FD-S	SPK BOX
	26	DCABA0226-1FD-W	CAB-A ASSEMBLY
	19	GBOX-0008-1FD-B	DOME SPK GUIDE
	77	GBOXS0014-1FD-B	DOME SPK BOX
	33	GCABA0226-1FD-F	CAB-A
	34	GCABB0268-1FD--	REAR CAB
	56	GCOVS0008-1FD-B	GUIDE COVER
	67	GDORP0199-1F---	DOOR
	43	GNETP0014-1P---	PET
	84	HBDGA0090-1----	"PICTURE-TEL" MARK
	45	HDECP0362-1F--D	AV FUNCTION PANEL
	45	HINDP0364-1P--B	IND-P
	02	HINDP0374-1P---	TRANSPARENCY FOR FBT
	70	JHNDP0020-1----	HANDLE SET
	27	JKNBP0510-1F--C	POWER KNOB
	09	JKNBP0511-1F---	FUNCTION KNOB
	10	LANGS0056-1P--B	ANGLE FOR SPK FIX
	18	LCHSP0023-1F--A	CHASSIS
	58	LFIX-0017-1P---	FIX PLATE
	48	LHLD-0180-1----	DOOR LOCKER
	88	LHLDW0094-1----	ROTATION COIL
	81	MSPR-0003-1----	SPRING FOR CRT
	07	PCUSS0056-1Z---	DOME SPK*2
	61	PCUSS0061-1---A	SPONGE FOR CRT SHIELD
	16	PMAG-1108-1A---	CRT USE
	44	PREFL0010-1F--B	REF FOR RC&LED
	82	PSLD-0008-1P--B	SHIELD-P FOR IC001
	56	PSLDM0276-1P--C	CRT PWB BOX
	59	PSPAG0020-1---A	CRT SPACER
	02	PSPAG0020-1----	
	37	PWABS0027-1----	WAVE ABSOPTION GBOX-0008(L*2, R*2)
	01	PWABS0029-1----	WAVE ABSOPTION GBOXS0008(L*1, R*1)
	58	PWABS0029-1---A	WAVE ABSOPTION GBOXS0008(L*1, R*1)
	61	PWABS0030-1----	WAVE ABSOPTION GBOX-0008 (L*1, R*1)
	40	PWABS0031-1----	WAVE ABSOPTION DOME SPK WABS
	22	PWABS0032-1----	WAVE ABSOPTION GBOX-0008 (L*1, R*1)
*	87	QACCF1063-1DX--	AC CORD
	24	QCODS1039-1D---	SIGNAL CABLE
	67	QPLGR1199-1----	AUDIO CABLE
	79	QTMLA1113-1F–I	ANT PANEL
	18	RBATB0213-1DC--	BATTERY (3)
*	16	RCILG1078-1----	DEGAUSSING COIL
	61	RCILQ1019-1---A	ROTATION COIL
	23	RSPKER086-18TN-	SPEAKER SPK L-HI,R-HI
	29	RSPKKS087-18WNA	SPK L-LOW, R-LOW
	03	SPAKA0579-1F---	PACKING AD
	08	SPAKC0623-1R-AO	PACKING CASE
	41	SPAKH0079-1FW-E	HOSO-PP
	29	SSAKD0003-1----	PE BAG (MANUAL)
	59	SSAKH0097-1----	POLY BAG
	40	TINSE1952-1----	USER MANUAL
	56	TLABD1025-1B--A	BAR CODE

	14	TLABD1109-1B---	WATING LABEL (NOTICE DAN GERS)
	41	TLABM1142-1----	MODEL LABEL
*	87	VBM81AHM50X01-A	CRT
	08	XETSD40P30000--	SCREW CAB-AB*8
	44	XETSD40P10000--	SCREW SPK FIX
	64	XTTSB40P16000--	SCREW QTMLA*4,CAB*2
	42	TMAPT1004-1----	INSTALL SKETCH
	73	ZSTPL-MAX10-1M-	DATA
	25	XEASD30P08000--	SPK*4
	34	XNESD80-65000--	M8 NUT FOR CRT SCREW
	64	XWTSD82-20154--	SPRING WASHER FOR CRT
	13	LX-WZ0019-1----	WASHER FOR CRT
	47	XTTSD30P12000--	CHASS & CAB-A FIX
	74	XHISE40P08TV0--	LANGF0729*1
	59	XESSB30P12000--	ANT PANEL & CHASSIS*5,HDECP0362 & AV BOARD*7
	58	XEASD30P10000--	SCREW MAIN PWB*9, TWEETER*4, FIX POWER PWB, FUNCTION CHASSIS*2,LIGHT GUIDE, DAMPER,PLATE*2
	35	XEASD30P12000--	FIX LFIX-0017
	11	XETSD40P08000--	VM PWB*2
	37	PCAPH0005-1F---	VR COVER
	30	XETSD40P16000--	SCREW GCOVS0008 & GCOV-0008 FIX,CAB-A & DOME*8, ANG & DOME SPK*8
	08	XETSD40P30000--	SCREW CRT HOLD
	47	XHSSB30P12000--	SCREW LANGP0182*3
	77	XJASD30P10000--	SCREW PRDAA0170*2,PRDAA0117*2,PRADD0164*2,
	78	XJSSB30P12000--	SCREW AC CORD*2

2.AUDIO POWER BOARD

G PWB	16	QPWB51059-1B-3-	POWER / SOUND AMP BOARD			
C301,308,312	78	VCEACU1HG475M-P	4.7uF	50V	±20%	Aluminum Elect.
C302,307	15	VCEACU1HG564M-P	.56uF	50V	±20%	Aluminum Elect.
C303,306	50	VCPELU1HG822J-P	8200PF	50V	±5%	Polypropylene Film
C304,305	13	VCEACU1HG474M-P	.47uF	50V	±20%	Aluminum Elect.
C309,311	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
C310	85	VCPELU1HG473J-P	.047uF	50V	±5%	Polypropylene Film
C313,315	19	VCENCU1CG106M-P	10uF	16V	±20%	Aluminum Elect.
C318	50	VCEACU1HG225M-P	2.2uF	50V	±20%	Aluminum Elect.
C321	45	VCEACU1CG476M-P	47uF	16V	±20%	Aluminum Elect.
C322~324	77	VCEACU1HG105M-P	1uF	50V	±20%	Aluminum Elect.
C327,331	05	VCDCDU1HH560J-P	56PF	50V	±20%	Temp. Comp. Ceramic
C328,333	32	VCEACU1HG334M-P	.33uF	50V	±20%	Aluminum Elect.
C329,334	74	VCEACU1HG224M-P	.22uF	50V	±20%	Aluminum Elect.
C332,342	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
C338,340	60	VCPELU1HG104J-P	.1uF	50V	±5%	Polypropylene Film
C339,341	13	VCEACU1HG474M-P	.47uF	50V	±20%	Aluminum Elect.
C343,356,357	57	VCPELU1HG223J-P	.022uF	50V	±5%	Polypropylene Film
C345,347	53	VCPELU1HG124J-P	.12uF	50V	±5%	Polypropylene Film
C346	21	VCEACU1CG477M-P	470uF	16V	±20%	Aluminum Elect.
C351,352	32	VCEACU1HG334M-P	.33uF	50V	±20%	Aluminum Elect.
C358,359	83	VCEACU1VG108M-P	1000uF	35V	±20%	Aluminum Elect.
C366,367	17	VCKBDU1HY222K-P	2200PF	50V	±10%	High Diel. Ceramic
C368	85	VCEACU1CG108M-P	1000uF	16V	±20%	Aluminum Elect.
C374,375	17	VCKBDU1HY222K-P	2200PF	50V	±10%	High Diel. Ceramic
C376	02	VCEACU1HG227M-P	220uF	50V	±20%	Aluminum Elect.
C385	77	VCEACU1EG107M-P	100uF	25V	±20%	Aluminum Elect.
C386	29	VCEACU1HG107M-P	100uF	50V	±20%	Aluminum Elect.
C387,388	13	VCEACU1HG474M-P	.47uF	50V	±20%	Aluminum Elect.
C780	28	VCEACU2GG226M--	22uF	400V	±20%	Aluminum Elect.
C781	26	VCEACU1HG226M-P	22uF	50V	±20%	Aluminum Elect.
C782	20	VCPELU1HG472J-P	4700PF	50V	±5%	Polypropylene Film
C783	23	VCPELU1HG683J-P	.068uF	50V	±5%	Polypropylene Film
C784	12	VCEACU1HG104M-P	.1uF	50V	±20%	Aluminum Elect.
C785	38	VCPPHF2JG183J--	.018uF	630V	±5%	Polypropylene Film
∗ C786,787	61	VCKEDF7GY472MX3	4700PF	AC400V	±20%	High Diel. Ceramic
C788	62	VCRRDF3DY471K--	470PF	2KV	±10%	High Dielectric Ceramic
C789	73	VCEACF1HG338M--	3300uF	50V	±20%	Aluminum Elect.
C790	79	VCSFDU1HY104Z-P	.1uF	50V	+80%-20%	Semiconductor Ceramic
C791	37	VCRRDF3DY102K--	1000PF	2KV	±10%	High Dielectric Ceramic
C792,795	77	VCEACU1EG107M-P	100uF	25V	±20%	Aluminum Elect.
C798	44	VCKBDU1HY102K-P	1000PF	50V	±10%	High Diel. Ceramic
C799	17	VCKBDU1HY222K-P	2200PF	50V	±10%	High Diel. Ceramic
D301~309,316	89	VSD1N4148-----U	Diode	1N4148		
D786	50	VSDFR103------U	Diode	FR103		
D788	30	VSDUR1K-------U	Diode	UR1K		
D789	73	VSDSUF30J-----U	Diode	SUF30J		
D790	37	VSDSF16-------U	Diode	SF16		
F301	81	QFS-D202F-12X--	Fuse	2A/250V		

FB781	32	RCORA1025-1---U	Core					
FB782	80	RCORA1004-1---U	Core					
FB783~788	78	RCORA1026-1---U	Core					
GND2	67	QCNWS0651-1067-	Connector With Wire					
IC301	27	VSITA8184P-----	IC	TA8184P				
IC302	52	VSIMC14066BCP--	IC	MC14066BCP				
IC303~309	20	VSINJM4558D----	IC	NJM4558D				
IC310	68	VSINJM2904D----	IC	NJM2904D				
IC311	89	VSITDA2616-----	IC	TDA2616				
IC716	84	VSIVIPER100----	IC	VIPER100				
* IC717	15	VSIPC817C------	IC	PC817C				
IC781	38	VSILM2940CT5---	IC	LM2940CT5				
IC782	89	VSITL431CZ----P	IC	TL431CZ				
LO	12	QCNWS0092-1037-	Connector With Wire					
Q301,302,304	82	VSIDTC144ES---P	IC	DTC144ES				
Q303	01	VST2SC1815Y---P	Transistor	2SC1815Y				
R301,305	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film	
R302	08	VRNMK01--2R2J--	2.2	ohm	1W	5%	Metal Oxide Film	
R303,307,308	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film	
R304,306	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film	
R309	41	VRCPTV6--823J-U	82K	ohm	1/6W	5%	Carbon Film	
R310,311	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film	
R312~317	11	VRCPTV6--473J-U	47K	ohm	1/6W	5%	Carbon Film	
R318,343,368	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film	
R322,327	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film	
R323,326	03	VRCPTV6--123J-U	12K	ohm	1/6W	5%	Carbon Film	
R324,325	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film	
R328,329,333	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film	
R330~332	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film	
R334,335	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film	
R336,337	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film	
R338~341	03	VRCPTV6--123J-U	12K	ohm	1/6W	5%	Carbon Film	
R342,379,	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film	
R344,345,347	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film	
R346,348	62	VRCPTV6--682J-U	6.8K	ohm	1/6W	5%	Carbon Film	
R349,353,354	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film	
R350,355	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film	
R351,352,356	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film	
R357,358	75	VRCPTV6--272J-U	2.7K	ohm	1/6W	5%	Carbon Film	
R359,360,363	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film	
R361,362,364	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film	
R365,366	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film	
R367	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film	
R369	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film	
R370	54	VRCPTV6--332J-U	3.3K	ohm	1/6W	5%	Carbon Film	
R371	78	VRCPTV6--564J-U	560K	ohm	1/6W	5%	Carbon Film	
R372,373	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film	
R374,375	11	VRCPTV6--473J-U	47K	ohm	1/6W	5%	Carbon Film	
R376,383	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film	
R377,381,385	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film	
R378	02	VRCPTV6--154J-U	150K	ohm	1/6W	5%	Carbon Film	
R380	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film	
R382,384,390	13	VRCPTV6--563J-U	56K	ohm	1/6W	5%	Carbon Film	

R386,387	12	VRNMK02--R22J--	.22	ohm	2W	5%	Metal Oxide Film
R388,389	73	VRCPTV6--182J-U	1.8K	ohm	1/6W	5%	Carbon Film
R393,394	26	VRCPTV6--153J-U	15K	ohm	1/6W	5%	Carbon Film
R397,398	75	VRCPTV4--8R2J-U	8.2	ohm	1/4W	5%	Carbon Film
R399,3C8	75	VRCPTV6--272J-U	2.7K	ohm	1/6W	5%	Carbon Film
R3A0,3A1	73	VRCPTV6--182J-U	1.8K	ohm	1/6W	5%	Carbon Film
R3A2,3A3	65	VRCPTV6--822J-U	8.2K	ohm	1/6W	5%	Carbon Film
R3A4,R3A7	75	VRCPTV6--104J-U	100K	ohm	1/6W	5%	Carbon Film
R784	34	VRCPTV6--102J-U	1K	ohm	1/6W	5%	Carbon Film
R785	11	VRCPTV6--392J-U	3.9K	ohm	1/6W	5%	Carbon Film
R786	62	VRMPTV2--4R7J-U	4.7	ohm	1/2W	5%	Metal Film
R787	31	VRNMK02--153J--	15K	ohm	2W	5%	Metal Oxide Film
R790	60	VRNMK01--150J--	15	ohm	1W	5%	Metal Oxide Film
R792	35	VRCPTV6--472J-U	4.7K	ohm	1/6W	5%	Carbon Film
R794	76	VRCPTV6--393J-U	39K	ohm	1/6W	5%	Carbon Film
R795	01	VRMPTV2--472J-U	4.7K	ohm	1/2W	5%	Metal Film
R797	72	VRCPTV6--223J-U	22K	ohm	1/6W	5%	Carbon Film
SF	18	QCNWS0303-1297-	Connector With Wire				
* T781	77	RCVTP1397-1-U--	Convert Transformer				
ZD781	78	VSZMTZ3.9B----U	Zener Diode		MTZ3.9B		
“A”	62	VCNCP0307-EJST-	Connector				
“A1”	45	VCNCP0303-EJST-	Connector				
“D”	02	QCNCP1547-1----	Connector With Wire				
“GND”GND1”	50	QCNCP1517-1----	Connector With Wire				
	01	LANGF0777-1P---	QPWB51059*1 ANGLE				
	72	LANGF0778-1P---	QPWB51059*1 ANGLE				
	48	PRDAA0025-1P--V	RADIATOR IC311 USE				
	59	PRDAA0032-1A--H	RADIATOR IC716 USE				
	89	PRDAA0143-1P---	RADIATOR IC781 USE				
	71	QFSHC1017-1---P	PIN F301 USE				
	39	XBPSD30P10000--	SCREW IC781 USE				
	77	XJASD30P10000--	SCREW IC716*1				
	82	XJJSD30P10000--	SCREW IC311*2				

3.CRT BOARD

CRT PWB	12	QPWB51022-1B-3-	CRT BOARD			
C901,903,904	12	VCEACU1HG104M-P	.01uF	50V	±20%	Aluminum Elect.
C902,908,910	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect.
C905,907,915	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
C906	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect.
C909,914	45	VCKBDU1HY391K-P	390PF	50V	±10%	Temp. Comp. Ceramic
C911,913,916	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect.
C912	69	VCKBDU1HY471K-P	470PF	50V	±10%	Temp. Comp. Ceramic
C917	13	VCEACU1EG476M-P	47uF	25V	±20%	Aluminum Elect.
C921,925,926	20	VCKBDU1HY103K-P	.01uF	50V	±10%	High Diel. Ceramic
C922	54	VCKBDF2HY103K--	.01uF	500V	±10%	High Diel. Ceramic
C924	74	VCEACU1HG224M-P	.22uF	50V	±20%	Aluminum Elect.
C971	87	VCEACU2EG106M-P	10uF	250V	±20%	Aluminum Elect.
C972	84	VCEACU2EG225M-P	2.2uF	250V	±20%	Aluminum Elect.
C973	26	VCKBEF3DY103Z--	.01uF	2KV	+80%-20%	High Diel. Ceramic
D901~908	89	VSD1N4148-----U	Diode	1N4148		
D909~911	12	VSD1SS83------U	Diode	1SS83		
D971	74	VSD1N4002-----U	Diode	1N4002		
FB901~903	15	RCORA1021-1---U	Bead cord			
FB904,905	27	RCORA1033-1----	Bead cord			
IC901	12	VSITDA4885-----	IC	TDA4885		
L901	20	VL-PH100K0000-P	Peaking Coil	10uH		
L902,972,974	21	VL-PH470K0000-P	Peaking Coil	47uH		
L971,973,975	13	VL-NH3R3K0000-P	Peaking Coil	3.3uH		
Q901	61	VST2SC2482-----	Transistor	2SC2482		
Q902,904,906	01	VST2SC1815Y---P	Transistor	2SC1815Y		
Q903,905,907	46	VST2SC3790E----	Transistor	2SC3790E		
Q908,972,974	15	VST2SA1480E----	Transistor	2SA1480E		
Q909,971,973	46	VST2SC3790E----	Transistor	2SC3790E		
Q910	87	VST2SA1015Y---P	Transistor	2SA1015Y		
R901~904	10	VRCPTV6--103J-U	10K ohm	1/6W	5%	Carbon Film
R905	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R906~908	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R909,912	51	VRCPTV6--121J-U	120 ohm	1/6W	5%	Carbon Film
R910,913,915	53	VRCPTV6--680J-U	68 ohm	1/6W	5%	Carbon Film
R911,914,916	07	VRCPTV6--222J-U	2.2K ohm	1/6W	5%	Carbon Film
R917~919	58	VRCPTV6--101J-U	100 ohm	1/6W	5%	Carbon Film
R920,921	31	VRCPTV6--221J-U	220 ohm	1/6W	5%	Carbon Film
R922,924	51	VRCPTV6--121J-U	120 ohm	1/6W	5%	Carbon Film
R923,956	26	VRCPTV6--153J-U	15K ohm	1/6W	5%	Carbon Film
R925	49	VRCPTV6--183J-U	18K ohm	1/6W	5%	Carbon Film
R926,933,940	35	VRCPTV6--472J-U	4.7K ohm	1/6W	5%	Carbon Film
R927	53	VRCPTV6--680J-U	68 ohm	1/6W	5%	Carbon Film
R928,935,942	74	VRCPTV6--151J-U	150 ohm	1/6W	5%	Carbon Film
R929	32	VRCPTV6--6R8J-U	6.8 ohm	1/6W	5%	Carbon Film
R930,934,939	53	VRCPTV6--680J-U	68 ohm	1/6W	5%	Carbon Film
R931,937,944	53	VRCPTV4--184J-U	180K ohm	1/4W	5%	Carbon Film
R932,938,945	55	VRMPTV6-5761F-U	5.76K ohm	1/6W	1%	Metal Film
R936	18	VRCPTV6--120J-U	12 ohm	1/6W	5%	Carbon Film
R941,946	53	VRCPTV6--680J-U	68 ohm	1/6W	5%	Carbon Film
R943	87	VRCPTV6--220J-U	22 ohm	1/6W	5%	Carbon Film

R947,948	05	VRCPTV4--270J-U	27	ohm	1/4W	5%	Carbon Film
R949,976,984	53	VRCPTV4--100J-U	10	ohm	1/4W	5%	Carbon Film
R950~952	31	VRNMK02--153J--	15K	ohm	2W	5%	Metal Oxide Film
R953,954,957	10	VRCPTV6--103J-U	10K	ohm	1/6W	5%	Carbon Film
R955	30	VRCPTV6--333J-U	33K	ohm	1/6W	5%	Carbon Film
R961~963	31	VRCPTV6--221J-U	220	ohm	1/6W	5%	Carbon Film
R971,980,988	82	VRCPTV2--470J-U	47	ohm	1/6W	5%	Carbon Film
R972,979,987	62	VRCPTV6--682J-U	6.8K	ohm	1/6W	5%	Carbon Film
R973~975	31	VRNMK02--153J--	15K	ohm	2W	5%	Metal Oxide Film
R977,978	05	VRCPTV4--270J-U	27	ohm	1/4W	5%	Carbon Film
R981~983	31	VRNMK02--153J--	15K	ohm	2W	5%	Metal Oxide Film
R985,986	05	VRCPTV4--270J-U	27	ohm	1/4W	5%	Carbon Film
R989	62	VRCPTV4--102J-U	1K	ohm	1/6W	5%	Carbon Film
R990	24	VRCPTV6--225J-U	2.2M	ohm	1/6W	5%	Carbon Film
R991	69	VRCPTV2--563J-U	56K	ohm	1/2W	5%	Carbon Film
R993	80	RR-HZ106M-1V4--	10M	ohm	1/4W	20%	H.V. Resistance
SG974	13	QSPG-1009-1---U	Spark Gap				
SG971~973	82	QSPG-1013-1---U	Spark Gap				
SG975	50	QSPG-1010-1---U	Spark Gap				
VR901	41	RVRSVF001-1206-					
*	18	QSOCC1334-112--	CRT SOCKET				
“CV”	09	VCNCP0046-JJST-	Connector				
“G”	68	VCNCP0102-PJST-	Connector				
“HS”	80	VCNCP0047-JJST-	Connector				
“KH”	44	VCNCP0049-JJST-	Connector				
“PO”	45	VCNCP0044-JJST-	Connector				
	53	PRDAA0140-1P--F	RADIATOR Q903,905,907 USE				
	39	XBPSD30P10000--	SCREW Q903,905,907 USE				
	44	XJASD30P08000--	SCREW AUDIO PWB & ANGLE*2 USE				

4. VM BOARD

VM PWB	13	QPWB11275-1BA2-	VM PWB				
CV1,V13	45	VCEACU1CG476M-P	47uF	16V	±20%		Aluminum Elect.
CV6	50	VCPELU1HG822J-P	8200PF	50V	±5%		Polypropylene Film
CV7	71	VCKBDU1HY561K-P	560PF	50V	±10%		High Diel. Ceramic
CV8	09	VCKFDU1HY103Z-P	.01uF	50V	±20%		High Diel. Ceramic
CV09	79	VCSFDU1HY104Z-P	.01uF	50V	+80%-20%		Semiconductor Ceramic
CV10,V11	50	VCEACU1HG225M-P	2.2uF	50V	±20%		Aluminum Elect.
CV12	44	VCKBDU1HY102K-P	1000PF	50V	±10%		High Diel. Ceramic
CV14,V16	79	VCKBDF2HY472K--	4700PF	500V	±10%		High Diel. Ceramic
CV15,V17	75	VCDSDU1HL101J-P	100PF	50V	±5%		Temp. Comp. Ceramic
CV18,19	15	VCEACU2DG476M-P	47uF	200V	±20%		Aluminum Elect.
CV21	31	VCDSDU2HL560J-P	56PF	50V	±5%		Temp. Comp. Ceramic
CV22,V23	14	VCEACU2DG106M-P	10uF	200V	±20%		Aluminum Elect.
DV1~V4	89	VSD1N4148-----U	Diode	1N4148			
DV5,V6	39	VSD1SS11914TA-U	Diode	1SS11914TA			
DV7,V8	61	VSDRH1S--------	Diode	RH1S			
FBV1,V2	15	RCORA1021-1----	Bead cord				
QV10	87	VST2SA1015Y---P	Transistor	2SC1015Y			
QV11	25	VST2SC1837-----	Transistor	2SC1837			
QV12	36	VST2SC4793-----	Transistor	2SC4793			
QV2,V4~V9	01	VST2SC1815Y---P	Transistor	2SC1815Y			
RV3	61	VRCPTV6--561J-U	560 ohm	1/6W	5%		Carbon Film
RV6,V43	72	VRCPTV6--223J-U	22K ohm	1/6W	5%		Carbon Film
RV10	07	VRCPTV6--222J-U	2.2K ohm	1/6W	5%		Carbon Film
RV11	34	VRCPTV6--102J-U	1K ohm	1/6W	5%		Carbon Film
RV12	25	VRCPTV6--471J-U	470 ohm	1/6W	5%		Carbon Film
RV13	86	VRCPTV6--681J-U	680 ohm	1/6W	5%		Carbon Film
RV14,V28,V33	50	VRCPTV6--152J-U	1.5K ohm	1/6W	5%		Carbon Film
RV15	28	VRCPTV6--560J-U	56 ohm	1/6W	5%		Carbon Film
RV16,V17	11	VRCPTV6--392J-U	3.9K ohm	1/6W	5%		Carbon Film
RV18	76	VRCPTV6--393J-U	39K ohm	1/6W	5%		Carbon Film
RV19	13	VRCPTV6--563J-U	56K ohm	1/6W	5%		Carbon Film
RV20	65	VRCPTV6--822J-U	8.2K ohm	1/6W	5%		Carbon Film
RV21,V22,V24	07	VRCPTV6--222J-U	2.2K ohm	1/6W	5%		Carbon Film
RV23	10	VRCPTV6--103J-U	10K ohm	1/6W	5%		Carbon Film
RV25	80	VRMPTV2--100J-U	10 ohm	1/2W	5%		Metal Film
RV26,V27	56	VRCPTV6--820J-U	82 ohm	1/6W	5%		Carbon Film
RV29,V34	27	VRCPTV6--122J-U	1.2K ohm	1/6W	5%		Carbon Film
RV30,V31	38	VRCPTV6--683J-U	68K ohm	1/6W	5%		Carbon Film
RV32	03	VRCPTV6--123J-U	12K ohm	1/6W	5%		Carbon Film
RV35,V36	83	VRMPTV2--560J-U	56 ohm	1/2W	5%		Metal Film
RV37,V38	13	VRMPTV2--2R7J-U	2.7 ohm	1/2W	5%		Metal Film
RV39	83	VRNMK02--331J--	330 ohm	1/2W	5%		Metal Oxide Film
RV40	16	VRNMK02--392J--	3.9K ohm	2W	5%		Metal Oxide Film
RV41	30	VRCPTV6--333J-U	33K ohm	1/6W	5%		Carbon Film
RV42	51	VRCPTV6--273J-U	27K ohm	1/6W	5%		Carbon Film
U	02	QCNWS0305-1179-	Connector With Wire				
U1	46	QCNWS0302-1290-	Connector With Wire				
“U”	63	VCNCP0302-EJST-	Connector				
	70	PRDAM0032-1P---	RADIATOR QV11,V12 USE				
	44	XJASD30P08000--	QV11,V12 USE				

5.AV & YUV BOARD

AV & YUV	**73**	**QPWB51087-1G--- AV & YUV PWB**				
C802,803,804	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C806,807,808	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C809,810,812	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C811	21	**VCEACU1CG477M-P**	470uF	16V	±20%	Aluminum Elect
C813,827,828	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C814,801,817	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C816,805,815	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C818,887,8A5	45	**VCEACU1CG476M-P**	47uF	16V	±20%	Aluminum Elect
C821,8C9	28	**VCDCDU1HH121J-P**	120P	50V	±5%	Temp. Comp. Ceramic
C822	22	**VCDCDU1HH330J-P**	33P	50V	±5%	Temp. Comp. Ceramic
C823,880,8M5	**77**	**VCEACU1HG105M-P**	**1uF**	**50V**	**±20%**	**Aluminum Elect**
C824,820	68	**VCDCDU1HH390J-P**	39P	50V	±5%	Temp. Comp. Ceramic
C832,846,847	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C833,834,831	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C835,837,838	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C839,840,850	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C841,8M1,8A2	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C842,843,845	77	**VCEACU1HG105M-P**	1uF	50V	±20%	Aluminum Elect
C848,851	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C849,8N7,8P6	53	**VCEACU1HG106M-P**	10uF	50V	±20%	Aluminum Elect
C854	84	**VCDCDU1HH120J-P**	12P	50V	±5%	Temp. Comp. Ceramic
C855	18	**VCDCDU1HH150J-P**	150P	50V	±5%	Temp. Comp. Ceramic
C856	81	**VCPELU1HG222J-P**	2200PF	50V	±5%	Polypropylene Film
C857	74	**VCEACU1HG224M-P**	0.22uF	50V	±20%	Aluminum Elect
C858,864,875	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C859	40	**VCEACU1CG337M-P**	330uF	16V	±20%	Aluminum Elect
C860	18	**VCMECU1JG104J-P**	0.1uF	63V	±5%	Metal Ploy. Film
C861,866,870	50	**VCEACU1HG225M-P**	2.2uF	50V	±20%	Aluminum Elect
C862,867,876	20	**VCEACU1CG107M-P**	100uF	16V	±20%	Aluminum Elect
C863	64	**VCDCDU1HH220J-P**	220P	50V	±5%	Temp. Comp. Ceramic
C865	57	**VCPELU1HG223J-P**	0.022uF	50V	±5%	Polypropylene Film
C868	71	**VCKBDU1HY561K-P**	560PF	50V	±10%	High Diel. Ceramic
C869,8V3,8V4	78	**VCEACU1HG475M-P**	4.7uF	50V	±20%	Aluminum Elect
C871,879,884	50	**VCEACU1HG225M-P**	2.2uF	50V	±20%	Aluminum Elect
C872,873,874	12	**VCEACU1HG104M-P**	0.1uF	50V	±20%	Aluminum Elect
C877	77	**VCEACU1HG105M-P**	1uF	50V	±20%	Aluminum Elect
C878,8A3,8C6	20	**VCEACU1CG107M-P**	100uF	16V	±20%	Aluminum Elect
C881,882,883	18	**VCMECU1JG104J-P**	0.1uF	63V	±5%	Metal Ploy. Film
C885,8A0,8V1	50	**VCEACU1HG225M-P**	2.2uF	50V	±20%	Aluminum Elect
C886,8A1,8C0	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C888	17	**VCKBDU1HY222K-P**	2200PF	50V	±10%	High Diel. Ceramic
C890,891,836	18	**VCKBDU1HY181K-P**	180PF	50V	±10%	High Diel. Ceramic
C8A4	35	**VCDCDU1HH101J-P**	100P	50V	±5%	Temp. Comp. Ceramic
C8A7	69	**VCKBDU1HY471K-P**	470PF	50V	±10%	High Diel. Ceramic
C8C1,8C4,8C5	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C8C2,8C3,844	17	**VCEACU1CG226M-P**	22uF	16V	±20%	Aluminum Elect
C8C7,8N4,8P1	20	**VCEACU1CG107M-P**	100uF	16V	±20%	Aluminum Elect
C8C8,8N8	38	**VCLRHN1HB103K-A**	0.01uF	50V	±10%	High Diel. Chip Capacitor
C8E1,8E2,8E3	33	**VCICHN1HH220J-A**	22PF	50V	±5%	High Diel. Chip Capacitor
C8E4,8E5,8E6	04	**VCICHN1HH101J-A**	100PF	50V	±5%	High Diel. Chip Capacitor
C8J4,8J5,8J6	05	**VCLRHN1CB104K-A**	0.1uF	16V	±10%	High Diel. Chip Capacitor
C8J7,8J8,8J9	05	**VCLRHN1CB104K-A**	0.1uF	16V	±10%	High Diel. Chip Capacitor
C8K0,8K1	44	**VCKBDU1HY102K-P**	1000PF	50V	±10%	High Diel. Ceramic

C8M0,8M3	45	VCEACU1CG476M-P	47uF	16V	±20%	Aluminum Elect
C8M2,8M4	13	VCEACU1HG474M-P	0.47uF	50V	±20%	Aluminum Elect
C8M6,8M7	77	VCEACU1HG105M-P	1uF	50V	±20%	Aluminum Elect
C8M8,8M9	75	VCLFHN1CY474M-A	0.47uF	16V	±20%	High Diel. Chip Capacitor
C8N0,8N1,8N2	05	VCLRHN1CB104K-A	0.1uF	16V	±10%	High Diel. Chip Capacitor
C8N5,8N6	33	VCICHN1HH220J-A	22PF	50V	±5%	High Diel. Chip Capacitor
C8P2,819,889	82	VCEACU1CG227M-P	220uF	16V	±20%	Aluminum Elect
C8P3,8V2	20	VCEACU1CG107M-P	100uF	16V	±20%	Aluminum Elect
C8P4	82	VCEACU1CG227M-P	220uF	16V	±20%	Aluminum Elect
C8P8,8V5	53	VCEACU1HG106M-P	10uF	50V	±20%	Aluminum Elect
CY02	60	VCICHN1HH100J-A	10PF	50V	±5%	High Diel. Chip Capacitor
D801,802,803	19	VSDRLS4148----A	Diode		RLS4148	
D804,805,806	19	VSDRLS4148----A	Diode		RLS4148	
D807,808,809	19	VSDRLS4148----A	Diode		RLS4148	
D810	19	VSDRLS4148----A	Diode		RLS4148	
D811	19	VSDRLS4148----A	Diode		RLS4148	
IC801	63	VSITA1276AN----	IC			TA1276AN
IC802	57	VSIM52055FP---A	IC			M52055FP
IC804	84	VSINJM7805FA---	IC			NJM7805FA
IC804,805	30	ZSLCN-SG841----				
IC805		VSINJM7809FA---	IC			NJM7809FA
IC806	81	VSIM52472P-----	IC			M52472P
IC807	08	VSITC9090AN----	IC			TC9090AN
IC808,809	05	VSIHEF4052BT--A	IC			HEF4052BT
IC810	34	VSINJM2234D----	IC			NJM2234D
IC812	43	VSI74HC4538D--A	IC			74HC4538D
IC813	57	VSIM52055FP---A	IC			M52055FP
IC814	26	VSI74LS125----A	IC			74LS125
IC816	70	VSITA8772AN----	IC			TA8772AN
IC8V1	14	VSIUPC1406-----	IC			UPC1406
L801,802,805	28	VL-DH101K0000-U	Peaking coil		100uH	
L803	43	VL-DH150K0000-U	Peaking coil		15uH	
L804	67	VL-DH100K0000-U	Peaking coil		10uH	
L806	28	VL-DH101K0000-U	Peaking coil		100uH	
L807	67	VL-DH100K0000-U	Peaking coil		10uH	
PWB	48	ZSOLDW500-1R6--				
Q801,802,803	01	VST2SC1815Y---P	Transistor			2SC1815Y
Q804,809,810	01	VST2SC1815Y---P	Transistor			2SC1815Y
Q805,806,807	82	VSIDTC144ES---P	IC			DTC144ES
Q811,812,819	82	VSIDTC144ES---P	IC			DTC144ES
Q813,814,815	87	VST2SA1015Y---P	Transistor			2SA1015Y
Q816,831	01	VST2SC1815Y---P	Transistor			2SC1815Y
Q818	87	VST2SA1015Y---P	Transistor			2SA1015Y
Q820,821	19	VST2SC2412KBQ-A	Transistor			2SC2412KBQ
Q822,832	82	VSIDTC144ES---P	IC			DTC144ES
Q8V1,8V2	86	VSTDTC363ES---P	Transistor			DTC363ES
R801,808,818	33	VRMHNVG--750J-A	75	ohm	1/8W 5%	Metal Film
R802,807,809	81	VRMHNVG--101J-A	100	ohm	1/8W 5%	Metal Film
R803,805,814	09	VRMHNVG--104J-A	100K	ohm	1/8W 5%	Metal Film
R804,811,813	58	VRMHNVG--472J-A	4.7K	ohm	1/8W 5%	Metal Film
R810,812,828	09	VRMHNVG--104J-A	100K	ohm	1/8W 5%	Metal Film
R815,838,841	58	VRMHNVG--472J-A	4.7K	ohm	1/8W 5%	Metal Film
R816,837,840	09	VRMHNVG--104J-A	100K	ohm	1/8W 5%	Metal Film
R817,806	35	VRCPTV6--472J-U	4.7K	ohm	1/6W 5%	Carbon Film
R819	08	VRMHNVG--151J-A	150	ohm	1/8W 5%	Metal Film

R820,847,850	81	VRMHNVG--101J-A	100	ohm	1/8W	5%	Metal Film
R821,823,855	06	VRMHNVG--223J-A	22K	ohm	1/8W	5%	Metal Film
R822,860,861	30	VRMHNVG--222J-A	2.2K	ohm	1/8W	5%	Metal Film
R824	07	VRCPTV6--222J-U	2.2K	ohm	1/6W	5%	Carbon Film
R825,826,8A6	34	VRMHNVG--473J-A	47K	ohm	1/8W	5%	Metal Film
R829,831,832	09	VRMHNVG--104J-A	100K	ohm	1/8W	5%	Metal Film
R842,848	84	VRMHNVG--561J-A	560	ohm	1/8W	5%	Metal Film
R843,886,895	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R844,882,884	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R845,8C7	23	VRMHNVG--821J-A	820	ohm	1/8W	5%	Metal Film
R846,849,8C0	54	VRMHNVG--221J-A	220	ohm	1/8W	5%	Metal Film
R851,852,853	30	VRMHNVG--222J-A	2.2K	ohm	1/8W	5%	Metal Film
R857,858,8A2	60	VRMHNVG--562J-A	5.6K	ohm	1/8W	5%	Metal Film
R862,863,864	33	VRMHNVG--750J-A	75	ohm	1/8W	5%	Metal Film
R865,866,867	33	VRMHNVG--750J-A	75	ohm	1/8W	5%	Metal Film
R868,Y07	09	VRMHNVG--104J-A	100K	ohm	1/8W	5%	Metal Film
R869,8A0,8F2	06	VRMHNVG--223J-A	22K	ohm	1/8W	5%	Metal Film
R870	72	VRMHNVG--183J-A	18K	ohm	1/8W	5%	Metal Film
R871,874	12	VRMHNVG--331J-A	330	ohm	1/8W	5%	Metal Film
R872,875,883	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
R873	82	VRMHNVG--303J-A	30K	ohm	1/8W	5%	Metal Film
R877	58	VRMHNVG--391J-A	390	ohm	1/8W	5%	Metal Film
R878,8F4,8T1	30	VRMHNVG--222J-A	2.2K	ohm	1/8W	5%	Metal Film
R879,880,897	81	VRMHNVG--101J-A	100	ohm	1/8W	5%	Metal Film
R885,887,888	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R889,893,894	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R890,891,892	73	VRMHNVG--152J-A	1.5K	ohm	1/8W	5%	Metal Film
R896,859	88	VRMHNVG--822J-A	8.2K	ohm	1/8W	5%	Metal Film
R898,876	77	VRMHNVG--332J-A	3.3K	ohm	1/8W	5%	Metal Film
R8A1,8A8,8A9	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
R8A3,8A5,8J6	58	VRMHNVG--472J-A	4.7K	ohm	1/8W	5%	Metal Film
R8A4,8E5,8E1	61	VRMHNVG--683J-A	68K	ohm	1/8W	5%	Metal Film
R8A7,8J1,Y08	34	VRMHNVG--473J-A	47K	ohm	1/8W	5%	Metal Film
R8C1	54	VRMHNVG--221J-A	220	ohm	1/8W	5%	Metal Film
R8C2,8C3,8C4	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
R8C5,8C6,8H2	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
R8C8,8E9	26	VRMHNVG--123J-A	12K	ohm	1/8W	5%	Metal Film
R8C9	42	VRMHNVG--752J-A	7.5	ohm	1/8W	5%	Metal Film
R8E3	07	VRMHNVG--182J-A	1.8K	ohm	1/8W	5%	Metal Film
R8E4	50	VRMHNVG--122J-A	1.2K	ohm	1/8W	5%	Metal Film
R8F3	49	VRMHNVG--153J-A	15K	ohm	1/8W	5%	Metal Film
R8F5	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
R8F8,8F7,8F6	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R8H1,8J3,Y15	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film
R8H3,8H4,8H5	51	VRMHNVG--000J-A	0	ohm	1/8W	5%	Metal Film
R8H6,8V2	48	VRMHNVG--100J-A	10	ohm	1/8W	5%	Metal Film
R8H7,8H8,8H9	09	VRMHNVG--104J-A	100K	ohm	1/8W	5%	Metal Film
R8J0	76	VRMHNVG--680J-A	68	ohm	1/8W	5%	Metal Film
R8J2	79	VRMHNVG--820J-A	82	ohm	1/8W	5%	Metal Film
R8J4	53	VRMHNVG--333J-A	33K	ohm	1/8W	5%	Metal Film
R8J5,8J7	09	VRMHNVG--104J-A	100K	ohm	1/8W	5%	Metal Film
R8J8,8V3,8V4	58	VRMHNVG--472J-A	4.7K	ohm	1/8W	5%	Metal Film
R8P1	30	VRNMK01--5R6J--	5.6	ohm	1W	5%	Metal Oxide Film
R8P2	64	VRNMK01--330J--	33	ohm	1W	5%	Metal Oxide Film
R8V1	57	VRMHNVG--102J-A	1K	ohm	1/8W	5%	Metal Film

RJ1,J2,J3	51	VRMHNVG--000J-A	0	ohm	1/8W	5%	Metal Film
RJ4	51	VRMHNVG--000J-A	0	ohm	1/8W	5%	Metal Film
RY04	33	VRMHNVG--103J-A	10K	ohm	1/8W	5%	Metal Film
RY05	06	VRMHNVG--223J-A	22K	ohm	1/8W	5%	Metal Film
RY06,856	85	VRMHNVG--682J-A	6.8K	ohm	1/8W	5%	Metal Film
RY10,Y11,Y12	30	VRMHNVG--222J-A	2.2K	ohm	1/8W	5%	Metal Film
RY13	30	VRMHNVG--222J-A	2.2K	ohm	1/8W	5%	Metal Film
RY14,8E6	60	VRMHNVG--562J-A	5.6K	ohm	1/8W	5%	Metal Film
S-VIDEO 3	60	QSOCD1557-107--					
X801 (4.43M)	43	RCRSL1034-1----	Crystal		4.43MHz		
X802 (3.58M)	41	RCRSL1025-1----	Crystal		3.58MHz		
X803 (503K)	30	ROSCC1026-1----	Crystal		503KHz		
ZD801,802,803	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD806,807,808	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD809,812,813	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD814,815,816	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD814A,815A,8	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD817,818,819	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD817A,818A,8	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD820,821,822	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD820A,821A,8	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
ZD823,823A	64	VSZMTZJ5.1B---U	Zener Diode				MTZJ5.1B
"CT"	67	QCNWP0092-1042-					
"DB"	12	VCNCP030B-EJST-	Connector				
"FR1"	26	VCNCP0309-EJST-	Connector				
"GND"	50	QCNCP1517-1----					
"PI"	30	VCNCP030A-EJST-	Connector				
"SF" "PS"	45	VCNCP0303-EJST-	Connector				
"TA1"	42	QCNCP1620-114--					
"TA1"	75	VCNCS107ERJJST-	Connector				
"TM"	80	VCNCP0306-EJST-	Connector				
"TM1"	53	VCNCS1078SJJST-	Connector				
"U"	63	VCNCP0302-EJST-	Connector				
	46	XBPSD30P06000--	SCREW	AV			
	39	XBPSD30P10000--	SCREW	IC804			
	01	PISLF0053-1P---	LANGP0182				
	72	PISLF0054-1P---	LANGP0182				
	01	PISLV0129-1P---	LANGP0182·				
	37	LANGP0182-1P--A	TUNER				
	56	PRDAA0143-1P--D	RADIATOR				
	31	QJAKP1158-1-6-A	YUV-AUDIO				
	01	QJAKP1158-1-6-B	YUV JACK				
	35	QJAKP1159-1-4-B	S-AUDIO,A				
	73	QPWB51087-1G---	AV BOARD				
	86	QPWB51088-1B---	TRANS				
	60	ZEPOX-SOMIR200-					
	49	ZFLUXNCF150V---					
	15	ZSOLDB630------					
	71	ZTHNR-4520-----					

6. SYNC ON GREEN BOARD

PWB	71	**QPWB51093-1B---**	SYNC-ON- GREEN PWB				
C-S01,S02	13	**VCEACU1EG476M-P**	47uF	25V		20%	Aluminum Elect.
C-S03	28	**VCDCDU1HH121J-P**	120PF	50V		5%	Temp. Comp. Ceramic
C-S04	08	**VCDCDU1HH221J-P**	220PF	50V		5%	Temp. Comp. Ceramic
C-S05	45	**VCKBDU1HY472K-P**	4700PF	50V		10%	High Diel. Ceramic
C-S06	23	**VCPELU1HG683J-P**	0.068uF	50V		5%	Polypropylene Film
C-S07	53	**VCEACU1HG106M-P**	10uF	50V		20%	Aluminum Elect.
C-S08	20	**VCKBDU1HY103K-P**	0.01uF	50V		10%	High Diel. Ceramic
C-S09,S10,S13	78	**VCEACU1HG475M-P**	4.7uF	50V		20%	Aluminum Elect.
C-S11	77	**VCEACU1HG105M-P**	1uF	50V		20%	Aluminum Elect.
C-S12,S16	74	**VCDCDU1HH181J-P**	180PF	50V		5%	Temp. Comp. Ceramic
C-S14	68	**VCDCDU1HH390J-P**	39PF	50V		5%	Temp. Comp. Ceramic
D-S01,S02	89	**VSD1N4148-----U**	Diode		1N4148		
ICS01	31	**VSIM52346SP----**	IC		M52346SP		
ICS02	03	**VSI4053BP------**	IC		4053BP		
Q-S01	01	**VST2SC1815Y---P**	Transistor		2SC1815Y		
R-S01	21	**VRNMK01--390J--**	39	ohm	1W	5%	Metal Oxide Film
R-S02	89	**VRMMTV2--271J-U**	270	ohm	1/2W	5%	Metal Film
R-S03,S04	54	**VRCPTV6--332J-U**	3.3K	ohm	1/6W	5%	Carbon Film
R-S05	26	**VRCPTV6--153J-U**	15K	ohm	1/6W	5%	Carbon Film
R-S06	76	**VRCPTV6--393J-U**	39K	ohm	1/6W	5%	Carbon Film
R-S07	72	**VRCPTV6--223J-U**	22K	ohm	1/6W	5%	Carbon Film
R-S08	75	**VRCPTV6--104J-U**	100K	ohm	1/6W	5%	Carbon Film
R-S09,S10	13	**VRCPTV6--563J-U**	56K	ohm	1/6W	5%	Carbon Film
R-S11	50	**VRCPTV6--152J-U**	1.5K	ohm	1/6W	5%	Carbon Film
R-S12,S13	34	**VRCPTV6--102J-U**	1K	ohm	1/6W	5%	Carbon Film
R-S14	11	**VRCPTV6--392J-U**	3.9K	ohm	1/6W	5%	Carbon Film
ZDS01	47	**VSZMTZJ12B----U**	Zener Diode	MTZJ12B			
ZDS02	64	**VSZMTZJ5.1B---U**	Zener Diode	MTZJ5.1B			
“MV6”	10	**LFIX-0002-1F---**	Connector				
“SN”	15	**VCNCP480ARJVEN-**	Connector				

7. CS PWB

CS PWB	01	QPWB51064-1B-3-	CS PWB			
C383,384	29	VCENCT1EG475M-P	4.7uF	25V	±20%	Aluminum Elect.
C608	12	VCMPHF2GG274J--	.27uF	400V	±5%	Metal Ploy. Film
C609	52	VCMPHF2GG155J--	1.5uF	400V	±5%	Metal Ploy. Film
C610	15	VCMPHF2GG224J--	.22uF	400V	±5%	Metal Ploy. Film
C611	02	VCPPHF2JG563J--	.056uF	630V	±5%	Polypropylene Film
C685	27	VCPPHF2JG683J--	.068uF	630V	±5%	Polypropylene Film
C687	02	VCPPHF2JG563J--	.056uF	630V	±5%	Polypropylene Film
“MV7”	40	LFIX-0018-1P---	FIX PLATE			
D	46	QCNCS1633-1----	Connector With Wire			
LO	56	QCNWP0092-1012-	Connector With Wire			
LO	66	QCNWP0092-1018-	Connector With Wire			
LO	08	QCNWS0092-1019-	Connector With Wire			
GND1	06	QCNWS0651-1066-	Connector With Wire			
“LI2”	47	VCNCP4807RJVEN-	Connector			

SME-32DL5(P) ELECTRONIC PARTS LIST
VER1.0

8. RS232 BOARD

PWB	68	QPWB51089-1B--	RS232 PWB			
C1,10	45	VCEACU1CG476M-	47uF	16V	20%	Aluminum Elect
C11,12,13	78	VCLBHN1HY104K-	0.1uF	50V	10%	High Diel. Chip Capacitir
C14,15	11	VCLBHN1HY181K-	180PF	50V	10%	High Diel. Chip Capacitir
C2	77	VCEACU1HG105M-	1uF	50V	20%	Aluminum Elect
C3,4	10	VCICHN1HH180J-	18PF	50V	5%	High Diel. Chip Capacitir
C5	81	VCLBHN1HY331K-	330PF	50V	10%	High Diel. Chip Capacitir
C8,9	52	VCENCU1HG105M-	1uF	50V	20%	Aluminum Elect
D1	19	VSDRLS4148----	Diode			
IC01	63	VSIMTV212MS64-	IC	MTV212MS64		
IC02	15	VSIHIN232CB-T-	IC	HIN232CB		
R1,2	81	VRMHNVG--101J-	100	ohm		Metal Film
R3,4	58	VRMHNVG--472J-	4.7K	ohm		Metal Film
R5,6,12,13	68	VRMHNVG--330J-	33	ohm		Metal Film
X1	10	RCRSL1179-1---	Crystal	11.0592MHz		
"RS"	59	VCNCP0315-EJST	Connec	5PIN		
	76	QSOCI1517-142-	IC01 USE IC SOCKET			

7. SWITCH BOARD

PWB	06	QPWB51033-1B-2-	SWITCH PWB			
J001~007	37	QJUM-1039-1540U	jumper			
LD001	22	VSPHB5-133-----	POWER LED			
LD002	42	VSPHB5-132-----	STAND BY LED			
LD003	02	VSPHB5-134-----	POWER SAVING LED			
RGB182	36	QSOCD1549-115--				
R046	55	VRMPTV6-1201F-U	1.2K ohm	1/6W	1%	Metel Film
R048	84	VRMPTV6-1501F-U	1.5K ohm	1/6W	1%	Metel Film
R018,035,068	89	VRCPTV6--821J-U	820 ohm	1/6W	5%	Carbon Film
R052,054,055	78	VRMPTV6-1001F-U	1K ohm	1/6W	1%	Metel Film
R053	74	VRMPTV6-8200F-U	820 ohm	1/6W	1%	Metel Film
R/C	57	VSILTM9236E----	IC	LTM9236E		
SW001~007	43	QSW-A1199-11-1A	Switch			
“GND”	50	QCNCP1517-1----	Connector With Wire			
LO	08	QCNWS0092-1019-	Connector With Wire			
“B”	44	VCNCP0308-EJST-	Connector			
“FR”	83	VCNCP030C-EJST-	Connector			
	48	LCHSP0014-1F---	CHASSIS			
	21	GHLDP0068-1FD--	HOLDER LED*3			
	58	XEASD30P10000--	CHASSIS*3			
	79	HDECP037-1P---				

MMM Symptom Table

Bar code	sympton Table	Description	English Description
	M100	電源開機異常	No power
	M200	外觀不良	Poor Cosmetic
	M300	裝配不良	Poor Assembly
	M400	按鍵異常	Press Button Abnormal
	M500	聲音異常	Sound Abnormal
	M526	重低音不良	Poor Doom Function
	M600	調整異常	Poor Adjustment
	M700	亮度異常	Poor Brightness
	M800	影像異常	Poor Picture
	M826	影像跳火	Picture flash
	M900	聚焦異常	Poor focus
	MA00	收斂異常	Poor Convergence
	MB00	線性不良	Linearity Distortion
	MC00	消磁異常	Poor Degaussing
	MD00	消耗功率不良	Power Consumption out of spec
	ME00	水平異常	Poor Horizontal Scan
	MF00	垂直異常	Poor Vertical Scan
	MG00	PUR 異常	Poor Purity
	MH00	彩色異常	Color abnormal
	MI00	色溫不良	Poor Color temperature
	MJ00	背景異常	Background abnormal
	MK00	高壓異常	Hold down voltage abnormal
	ML00	LED 不良	LED Defect
	MM00	敲打不良	Shock Noise
	MN00	CRT 不良	CRT defect
	MO00	遙控異常	Infrared Receiver abnormal
	MP00	OSD 異常	No OSD
	M000	NDF	No Defect Found

MMM Root Cause Table

Bar code	Cause Table	Description	English Description
	*OA	未焊	Solder-Miss
	*OB	包焊	Cold Solderng
	*OC	流錫短路	SolderingShort
	*IB	斷線	Soldering Open
	*2A	未配	Missing Part
	*2B	誤配	Wrong PART
	*2C	極性反	Reversed polarity
	*2E	裝配不良	Assembly Defect
	*2F	插入不良	Inseration Defect
	*2J	人爲短路	Short by Manual
	*3C	傾斜	Part Tilt
	*4A	機構不良	Misformed
	*4B	調整不良	Installed Worng
	*4C	誤判	Incorrect Ruling
	*7C	開路	Open Trace
	*7F	零件不良	Part Defect
	*9E	銅箔短路	Short by copper foil
	*9F	銅箔開路	Open by copper foil
	*9H	其他	Other
	*OG	焊接不良	Poor Solder
	*1C	破皮	Part Damage
	*2G	接觸不良	Poor Contact
	*3H	空隙大	Gap too long
	WC01	客戶誤判	Customer Incorrect Ruling
	WC02	客戶設定錯誤	Customer setting wrong
	WC03	客戶使用不當	Customer improper use
	DR01	ROM 資料錯誤	ROM data error
	DR02	ROM 更新版本	ROM update new version
	DR03	ROM 重新燒錄	ROM rewrite again
	DR04	ROM 設定錯誤	ROM setting wrong
	WC04	NDF	No-Defect-Found

PACKING OF THE SET VER1.0

ITME	PART NO.	UNIT	REMARKS
1.	SPAKC0623-1R-AO	1	
2.	ACCESSORIES	1	
3.	SPAKA0579-1F---	CROP	
4.	CTV SET	1	
5.	SPAKC0623-1R-AO	1	
6.	SPAKA0579-1F---	CROP	

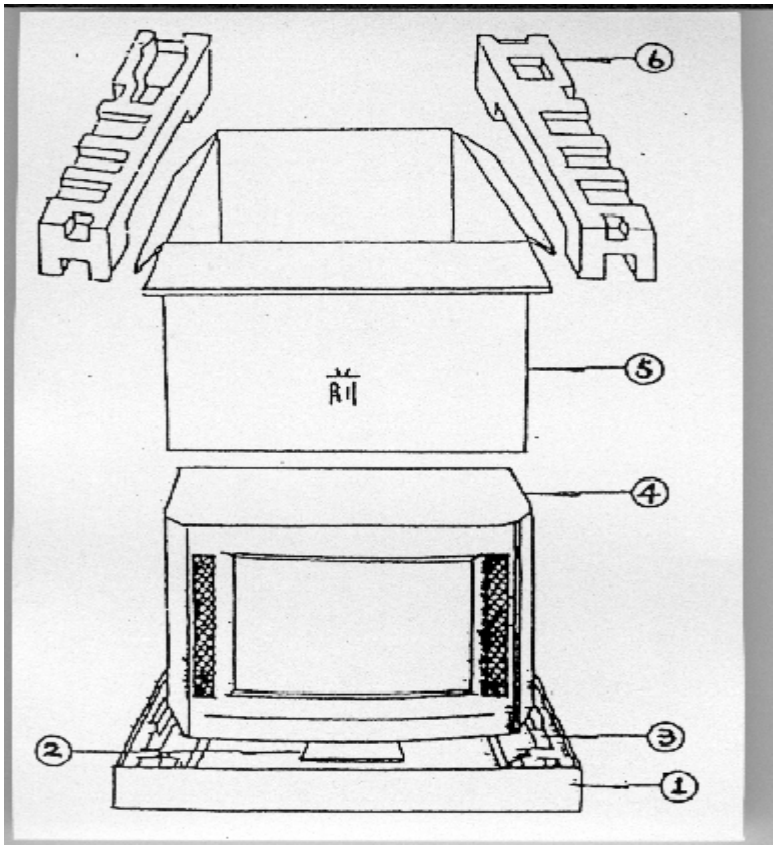

PACKING OF THE SET VER1.0

ITEM	PART NO.	UNIT	REMARKS
1.	SPAKC0623-1R-AO	1	
2.	JHNDP0020-1----	4